

## IPC-D140H(-M) 4 MP Fixed Dome Network Camera



- High quality imaging with 4 MP resolution
- Efficient H.265+ compression technology to save bandwidth and storage
- Clear imaging against strong back light due to 120 dB true WDR technology
- Water and dust resistant (IP67) and vandal resistant (IK10)
- 3D DNR technology delivers clean and sharp images
- Easy installation with Power over Ethernet (PoE) technology

## ▪ Specification

Camera	
Image Sensor	1/3" progressive scan CMOS
Max. Resolution	2560 × 1440
Min. Illumination	Color: 0.01 Lux @(F2.0, AGC ON), B/W: 0 Lux with IR
Shutter Time	1/3 s to 1/100,000 s
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 355°, tilt: 0° to 75°
Lens	
Focal Length & FOV	2.8 mm, horizontal FOV 98.0°, vertical FOV 53.1°, diagonal FOV 114.7° 4 mm, horizontal FOV 78.7°, vertical FOV 43.1°, diagonal FOV 92.3°
Lens Mount	M12
Focus	Fixed
Aperture	F2.0
Lens Type	Fixed focal lens, 2.8 and 4 mm optional
Iris Type	Fixed
Illuminator	
Supplement Light Type	IR
Supplement Light Range	Up to 30 m
IR Wavelength	850 nm
Smart Supplement Light	Yes
Video	
Main Stream	50 Hz: 20 fps (2560 × 1440) 25 fps (1920 × 1080, 1280 × 720) 60 Hz: 20 fps (2560 × 1440) 30 fps (1920 × 1080, 1280 × 720)
Sub-Stream	50 Hz: 25 fps (640 × 480, 640 × 360) 60 Hz: 30 fps (640 × 480, 640 × 360)
Video Compression	Main stream: H.265/H.264/H.265+/H.264+ Sub-stream: H.265/H.264/MJPEG
Video Bit Rate	32 Kbps to 8 Mbps
H.264 Type	Baseline Profile/Main Profile/High Profile
H.265 Type	Main Profile
Region of Interest (ROI)	1 fixed region for main stream
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP™, SMTP, IGMP, QoS, IPv6, Bonjour, IPv4, UDP, SSL/TLS
Simultaneous Live View	Up to 6 channels
API	Open Network Video Interface, ISAPI
User/Host	Up to 32 users. 3 levels: administrator, operator and user
Client	iVMS-4200, Hik-Connect
Web Browser	Plug-in required live view: IE 10+ Plug-in free live view: Chrome 57.0+, Firefox 52.0+ Local service: Chrome 57.0+, Firefox 52.0+

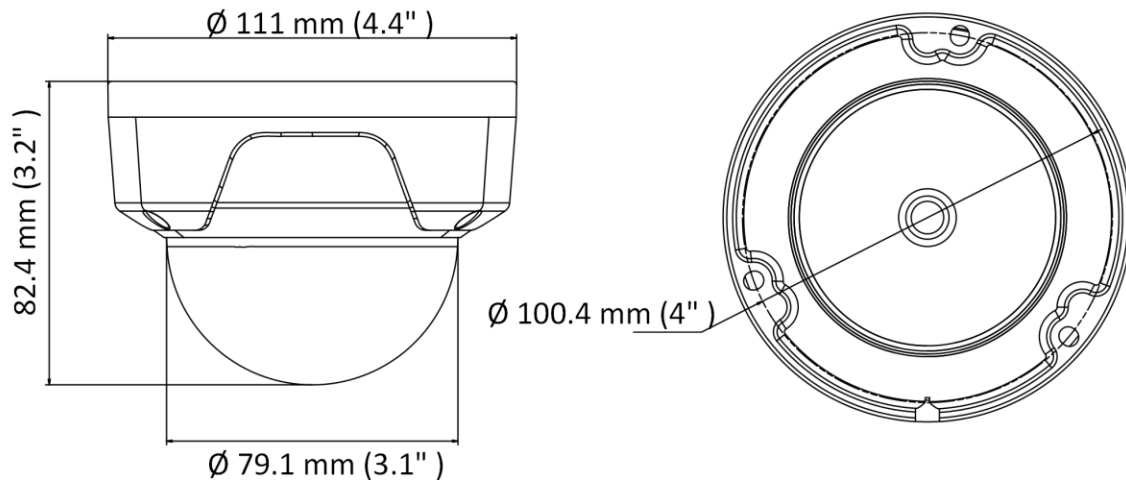
Image	
Image Settings	Saturation, brightness, contrast, sharpness, AGC, white balance adjustable by client software or web browser
Day/Night Switch	Auto, Schedule, Day, Night
Wide Dynamic Range (WDR)	120 dB
Image Enhancement	BLC, 3D DNR
Interface	
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
Event	
Basic Event	Motion detection, video tampering alarm, exception
Linkage	Upload to FTP, notify surveillance center, send email
General	
Power	12 VDC $\pm$ 25%, 0.4 A, max. 5 W, $\varnothing$ 5.5 mm coaxial power plug PoE: 802.3af, Class 3, 36 V to 57 V, 0.2 A to 0.15 A, max. 6.5 W
Dimension	$\varnothing$ 111 mm $\times$ 82.4 mm ( $\varnothing$ 4.4" $\times$ 3.2")
Package Dimension	134 mm $\times$ 134 mm $\times$ 108 mm (5.3" $\times$ 5.3" $\times$ 4.3")
Weight	Approx. 360 g (0.8 lb.)
With Package Weight	Approx. 560 g (1.2 lb.)
Storage Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity: 95% or less (non-condensing)
Startup and Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity: 95% or less (non-condensing)
Language	English, Ukrainian
General Function	Anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter
Approval	
EMC	FCC SDoC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032:2015, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 50130-4:2011+A1:2014); RCM (AS/NZS CISPR 32:2015); IC VoC (ICES-003: Issue 6, 2016); KC (KN 32:2015, KN 35:2015)
Safety	UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013, IEC 62368-1:2014); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013, IEC 62368-1:2014); BIS (IS 13252(Part 1):2010+A1:2013+A2:2015)
Environment	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)
Protection	IP67 (IEC 60529-2013), IK10 (IEC 62262:2002)

## ▪ Available Model

IPC-D140H(2.8mm)(C)  
 IPC-D140H(2.8mm)  
 IPC-D140H(4mm)(B)  
 IPC-D140H-M(4mm)(HiLookNEU)  
 IPC-D140H(4mm)  
 IPC-D140H(2.8mm)(TUR Tesan)  
 IPC-D140H(4mm)(HiLookNEU)  
 IPC-D140H-M(2.8mm)(B)  
 IPC-D140H(6mm)  
 IPC-D140H(6mm)(HiLookNEU)  
 IPC-D140H-M(2.8mm)

- IPC-D140H(2.8mm)(B)
- IPC-D140H-M(4mm)(B)
- IPC-D140H(4mm)(C)
- IPC-D140H(2.8mm)(HiLookNEU)
- IPC-D140H-M(2.8mm)(HiLookNEU)
- IPC-D140H-M(4mm)

▪ **Dimension**



Unit: mm (inch)















▪ **Accessory**

▪ **Optional**

DS-1275ZJ-SUS	DS-1258ZJ	DS-1272ZJ-110	DS-220AZJ-145-WA	DS-1271ZJ-110
DS-1475ZJ-SUS	DS-1280ZJ-DM18	DS-1250ZJ	DS-1272ZJ-110B	DS-1276ZJ-SUS
DS-1259ZJ	DS-1476ZJ-SUS	DS-1275ZJ-S-SUS	DS-220AZJ-130-WA	



▪ Installation Methods

<p><b>Vertical Pole Mounting</b> DS-1275ZJ-SUS+DS-1272ZJ-110B+DS-1253ZJ-M</p>	<p><b>Vertical Pole Mounting</b> DS-1475ZJ-SUS+DS-220AZJ-130-WA</p>	<p><b>Vertical Pole Mounting</b> DS-1275ZJ-S-SUS+DS-220AZJ-130-WA</p>	<p><b>Wall Mounting</b> DS-1258ZJ</p>	<p><b>Wall Mounting</b> DS-1272ZJ-110</p>
				
<p><b>Wall Mounting</b> DS-220AZJ-145-WA</p>	<p><b>Wall Mounting</b> DS-1272ZJ-110B+DS-1253ZJ-M</p>	<p><b>Wall Mounting</b> DS-220AZJ-130-WA</p>	<p><b>Pendant Mounting</b> DS-1271ZJ-110</p>	<p><b>Junction Box</b> DS-1280ZJ-DM18</p>
				
<p><b>Others</b> DS-1250ZJ</p>	<p><b>Corner Mounting</b> DS-1276ZJ-SUS+DS-1272ZJ-110</p>	<p><b>Corner Mounting</b> DS-1476ZJ-SUS+DS-220AZJ-145-WA</p>	<p><b>Inclined Ceiling Mounting</b> DS-1259ZJ</p>	
				

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

# HiLook