

## IPC-D150H(-M) 5 MP Fixed Dome Network Camera



- High quality imaging with 5 MP resolution
- Efficient H.265+ compression technology to save bandwidth and storage
- Clear imaging against strong back light due to 120 dB true WDR technology
- Water and dust resistant (IP67) and vandal resistant (IK10)
- 3D DNR technology delivers clean and sharp images
- Easy installation with Power over Ethernet (PoE) technology

## ▪ Specification

Camera	
Image Sensor	1/2.7" progressive scan CMOS
Max. Resolution	2560 × 1920
Min. Illumination	Color: 0.01 Lux @(F2.0, AGC ON), B/W: 0 Lux with IR
Shutter Speed	1/3 s to 1/100,000 s
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 355°, tilt: 0° to 75°
Lens	
Lens Type	Fixed focal lens, 2.8 and 4 mm optional
Focal Length & FOV	2.8 mm, horizontal FOV 98.0°, vertical FOV 71.7°, diagonal FOV 127.0° 4 mm, horizontal FOV 75.3°, vertical FOV 55.5°, diagonal FOV 98.2°
Lens Mount	M12
Iris Type	Fixed
Aperture	F2.0
Illuminator	
Supplement Light Type	IR
Supplement Light Range	Up to 30 m
IR Wavelength	850 nm
Video	
Main Stream	50 Hz: 20 fps (2560 × 1920) 25 fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60 Hz: 20 fps (2560 × 1920) 30 fps (2560 × 1440, 1920 × 1080, 1280 × 720)
Sub-Stream	50 Hz: 25 fps (1280 × 720, 640 × 480, 640 × 360) 60 Hz: 30 fps (1280 × 720, 640 × 480, 640 × 360)
Video Compression	Main stream: H.265+/H.265/H.264+/H.264 Sub-stream: H.265/H.264/MJPEG
Video Bit Rate	32 Kbps to 16 Mbps
H.264 Type	Baseline Profile/Main Profile/High Profile
H.265 Type	Main profile
Region of Interest (ROI)	1 fixed region for main stream
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP™, SMTP, IGMP, QoS, IPv6, Bonjour, IPv4, UDP, SSL/TLS
Simultaneous Live View	Up to 6 channels
API	Open Network Video Interface, ISAPI
User/Host	Up to 32 users. 3 levels: administrator, operator and user 3 user levels: administrator, operator, and user
Client	iVMS-4200, Hik-Connect
Web Browser	Plug-in required live view: IE 10+ Plug-in free live view: Chrome 57.0+, Firefox 52.0+ Local service: Chrome 57.0+, Firefox 52.0+
Image	
Image Settings	Saturation, brightness, contrast, sharpness, AGC, white balance adjustable by client software or web browser

Day/Night Switch	Auto, Schedule, Day, Night
Wide Dynamic Range (WDR)	120 dB
Image Enhancement	BLC, 3D DNR
<b>Interface</b>	
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
<b>Event</b>	
Basic Event	Motion detection, video tampering alarm, exception
Linkage	Upload to FTP, notify surveillance center, send email
<b>General</b>	
Power	12 VDC $\pm$ 25%, 0.4 A, max. 5 W, $\varnothing$ 5.5 mm coaxial power plug PoE: 802.3af, Class 3, 36 V to 57 V, 0.2 A to 0.15 A, max. 6.5 W
Dimension	$\varnothing$ 110.8 mm $\times$ 84.7 mm (4.4" $\times$ 3.3")
Package Dimension	134 mm $\times$ 134 mm $\times$ 108 mm (5.3" $\times$ 5.3" $\times$ 4.3")
Weight	Approx. 520 g (1.1 lb.)
With Package Weight	Approx. 720 g (1.6 lb.)
Storage Conditions	-30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)
Language	English, Ukrainian
General Function	Anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter
<b>Approval</b>	
EMC	FCC SDoC: 47 CFR Part 15, Subpart B; CE-EMC: EN 55032: 2015, EN 61000-3-2:2019, EN 61000-3-3:2013+A1:2019, EN 50130-4:2011+A1: 2014; RCM: AS/NZS CISPR 32: 2015; IC VoC: ICES-003: Issue 7; KC: KN 32: 2015, KN 35: 2015
Safety	UL: UL 62368-1; CB: IEC 62368-1:2014+A11; CE-LVD: EN 62368-1:2014/A11:2017; BIS: IS 13252(Part 1):2010/ IEC 60950-1: 2005
Environment	CE-RoHS: 2011/65/EU; WEEE: 2012/19/EU; Reach: Regulation (EC) No 1907/2006
Protection	IP67: IEC 60529-2013, IK10: IEC 62262:2002

## ▪ Available Model

IPC-D150H(2.8mm)

IPC-D150H-M(4mm)

IPC-D150H(6mm)(HiLookNEU)

IPC-D150H-M(4mm)(B)

IPC-D150H(2.8mm)(C)

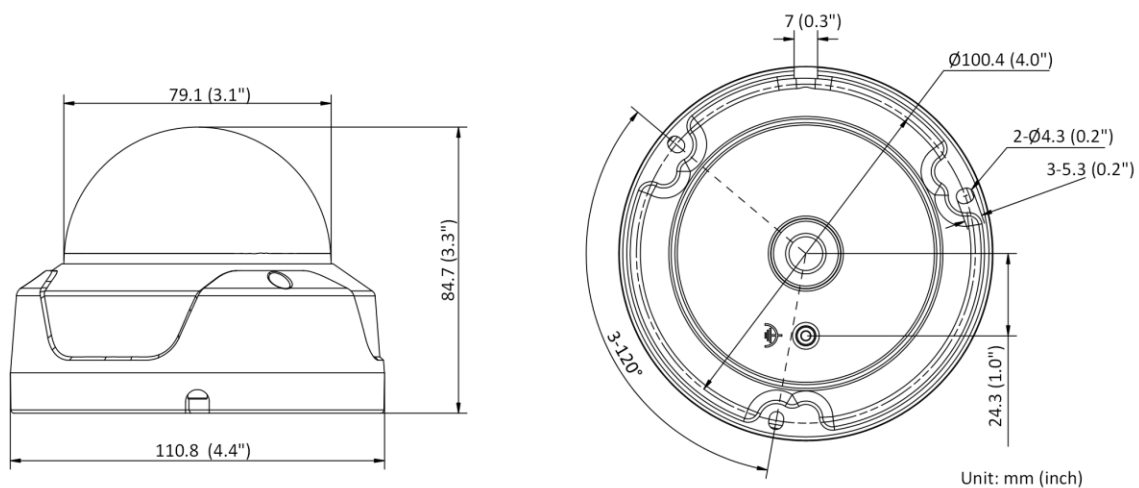
IPC-D150H(4mm)(C)

IPC-D150H-M(2.8mm)(UK Avesta)/Grey

IPC-D150H-M(2.8mm)

- IPC-D150H-M(2.8mm)(HiLookNEU)
- IPC-D150H-M(6mm)
- IPC-D150H(2.8mm)(B)
- IPC-D150H(4mm)
- IPC-D150H-M(4mm)(HiLookNEU)
- IPC-D150H(2.8mm)(HiLookNEU)
- IPC-D150H(4mm)(B)
- IPC-D150H(6mm)
- IPC-D150H(4mm)(HiLookNEU)
- IPC-D150H-M(6mm)(HiLookNEU)
- IPC-D150H-M(2.8mm)(B)

### ▪ Dimension

















### ▪ Accessory

#### ▪ Optional

DS-1258ZJ	DS-1280ZJ-DM18	DS-1259ZJ	DS-1275ZJ-SUS	DS-220AZJ-130-WA
DS-1276ZJ-SUS	DS-1272ZJ-110	DS-1272ZJ-110B	DS-1275ZJ-S-SUS	DS-1271ZJ-110

<b>DS-1476ZJ-SUS</b>	<b>DS-1250ZJ</b>	<b>DS-220AZJ-145-WA</b>	<b>DS-1475ZJ-SUS</b>
			

▪ Installation Methods

<b>Wall Mounting DS-1258ZJ</b>	<b>Wall Mounting DS-220AZJ-130-WA</b>	<b>Wall Mounting DS-1272ZJ-110+DS-12 53ZJ-M</b>	<b>Wall Mounting DS-1272ZJ-110B</b>	<b>Wall Mounting DS-220AZJ-145-WA</b>
				
<b>Junction Box DS-1280ZJ-DM18</b>	<b>Inclined Ceiling Mounting DS-1259ZJ</b>	<b>Vertical Pole Mounting DS-1275ZJ-SUS+DS-12 72ZJ-110+DS-1253ZJ- M</b>	<b>Vertical Pole Mounting DS-1275ZJ-S-SUS+DS- 220AZJ-145-WA</b>	<b>Vertical Pole Mounting DS-1475ZJ-SUS+DS-22 0AZJ-130-WA</b>
				
<b>Corner Mounting DS-1276ZJ-SUS+DS-12 72ZJ-110</b>	<b>Corner Mounting DS-1476ZJ-SUS+DS-22 0AZJ-130-WA</b>	<b>Pendant Mounting DS-1271ZJ-110</b>	<b>Others DS-1250ZJ</b>	
				

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

# HiLook