

DS-3WF1000S-EI-2N/P
2.4GHz 300Mbps 1KM Wireless Bridge



The dual wireless bridge can be applied in industries, such as wireless video security, railway, transportation, power and other industries, wireless video/data transmission, wireless coverage, carrier wireless backbone network construction, Wi-Fi wireless coverage, rural information construction, and wireless network coverage. The long-distance transmission of the device can guarantee multi-channel HD video transmission.


- Up to 1 km wireless transmission distance
- 300 Mbps 802.11n wireless bridge
- Built-in 7dBi 2 x 2 MIMO antenna
- Visualized topology management
- Standard PoE Output

▪ Specification


General	
Product Dimensions (W × H × D)	90.8 mm × 187.87 mm × 57.87 mm (3.57" × 7.39" × 2.27")
Package Dimensions (W × H × D)	132 mm × 228 mm × 91 mm (5.19" × 8.97" × 3.58")
Net Weight	0.26 kg (0.57 lb) per device
Gross Weight	0.58 kg (1.28 lb)
Packing List	Wireless Bridge × 1, Binding Tape × 2, Quick Start Guide × 1, Regulatory Compliance and Safety Information × 1, PoE Power Supply × 1, AC Cord × 1
Packing Method	Single unit packing
Working Temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working Humidity	5% to 95% (no condensation)
Storage Temperature	-40 °C to 80 °C (-40 °F to 176 °F)
Storage Humidity	5% to 95% (no condensation)
Installation Mode	Pole Mounting
Ingress Protection	IP55
Power Consumption	1.8 W for typical (1-ch 2MP IPC), Max. 4.5 W
Wireless Parameter	
Wireless Standard	IEEE 802.11b/g/n (2 × 2 MIMO 300 Mbps)
Max. Transmission Rate of Air Interface	≤ 300 Mbps
Working Frequency Band	2400 MHz ~ 2483.5 MHz
Antenna Gain	7 dBi
Antenna Angle	(H) Beamwidth [3 dB] 60°, (V) Beamwidth [3 dB] 50°
Transmitting Power	22 dBm @11n MCS0 (Note: Transmitting power may vary with local regulations.)
Receiving Sensitivity	-87±2 dBm @HT40 MCS0
Throughput Rate	PTP: 90 Mbps/0.2 KM(HT40), 90 Mbps/0.5 KM(HT40), 70 Mbps/1 KM(HT40), PTMP(1 to 4): 40 Mbps/1 KM(HT40)
PoE Power Supply	
PoE Port	LAN1 passive PoE IN, LAN2 802.3 af PoE OUT
PoE Power Budget	10 W
PoE Distance	100 m
Hardware Parameter	
Network Interface	2 × 10/100 Mbps RJ45 ports
LED Indicator	Power indicator, LAN indicator, Signal intensity indicator
Reset	Hardware resetting button
Power Supply	48V PoE; Check the physical interface image below for more details
Software Function	
Application Function	IFM, IPM
Channel Width	10/20/40 MHz
Channel Selection	Auto/manual selection
Security Mode	WPA2-PSK
Security Mechanism	Wireless network name hidden
Network Protocol	NTP (network time synchronization), SADP (auto search for IP address), HTTPS/HTTP (web management), SSH (debugging)
Management Method	HPP, HCP, Web, iVMS-4200
System Log	Syslog, Control center information

Upgrade	Web,iVMS-4200,HCP,HPP
HPP	<p>Support one-click activation and remote management via Hik-Partner Pro. Functions supported:</p> <ol style="list-style-type: none"> 1. Reboot device 2. Restore device 3. Display the topology information 4. Display the connection status between AP and CPEs, including signal intensity, background noise, sending & receiving rate 5. Configure wireless settings, including working mode, SSID, password, channel, channel bandwidth, transmitting power 6. Bridge alignment 7. Spectrum scanning 8. PoE output management
Approval	
EMC	CE-EMC(EN 55032, EN 50130-4, EN 55035, EN IEC 61000-3-2, EN 61000-3-3)
Safety	CB (IEC 62368-1),CE-LVD (EN 62368-1)
Chemistry	CE-RoHS (2011/65/EU),WEEE (2012/19/EU),Reach (Regulation (EC) No.1907/2006)
Radio	EN 301 489-17,EN 301 489-1, EN 61000-3-3, EN IEC 61000-3-2, EN 300 328, EN IEC 62311

▪ Typical Application

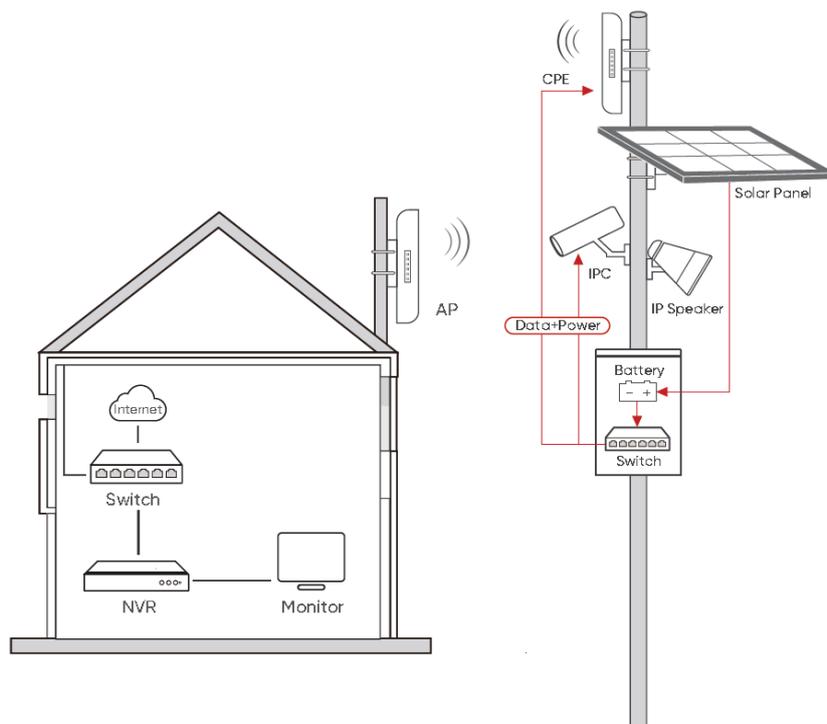

▪ Physical Interface

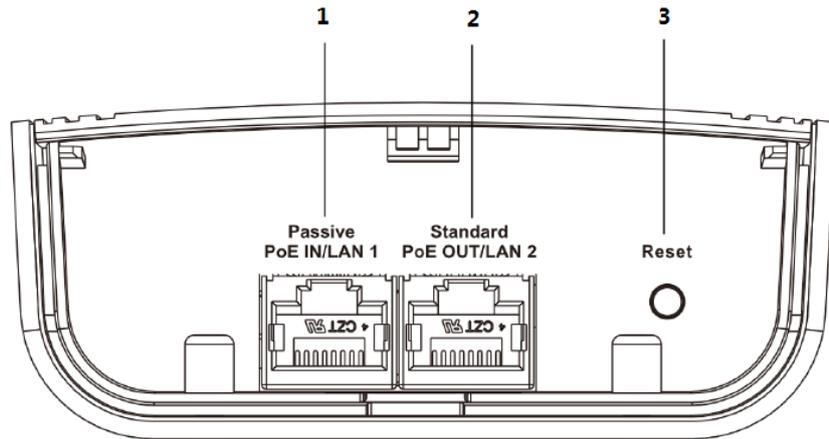


No.	Interface/Button	Description
1	Passive PoE IN/LAN 1	The 10/100 Mbps adaptive RJ45 port, also can be used as a passive PoE input port.
2	Standard PoE OUT/LAN 2	The 10/100 Mbps adaptive RJ45 port, also can be used as a standard PoE output port.
3	Reset	Long press for 4 seconds to restore to factory settings.

▪ Available Model

DS-3WF1000S-EI-2N/P

▪ Dimension

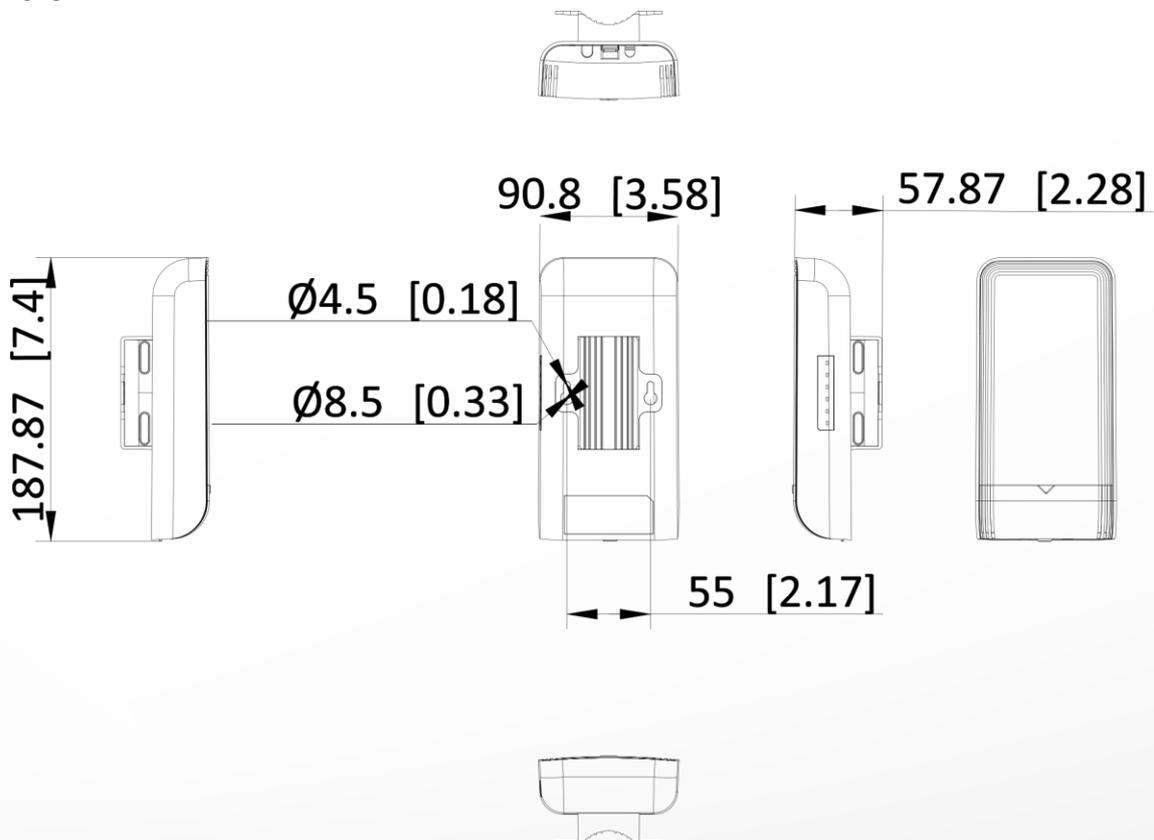

Unit: mm [inch]



See Far, Go Further



www.hikvision.com
support@hikvision.com

