

DS-QAPPU1212-N





- 2-channel 3-pin Phoenix terminal balanced inputs and 2-channel 3-pin Phoenix terminal balanced outputs, which can be connected to analog audio devices, such as wireless microphones, amplifiers, active speakers, etc., and can also be connected to encoding devices such as video conference terminals
- 1-channel 3.5 mm stereo input and 1-channel 3.5 mm stereo output. Support sound reinforcement from devices such as mobile phones and PCs
- 2 USB Type-C interfaces, which can be connected to USB cameras and computers to achieve video input and audio&video output, making the system easy to use
- Support 3A algorithms. Support setting functions such as mixing, filter, equalizer, feedback suppression, delay, limiter, etc., which provides better audio processing
- Support AES67 international standard transmission protocol (subsequent versions will support AES67 third-party compatibility), effectively ensuring low-latency and high-synchronization transmission for the network audio system
- Support device activation, network setting, routing setting, parameter setting, and other related operations via audio assistant tool
- Support power supply and audio transmission via POE network cables, making installation and wiring more convenient
- Compatible with cabinet installation and under-table or wall mounting, helping to keep the conference room clean



Specification

- Specification	
Basic Parameter	
Channel	AES 67 IN×24 ; AES 67 OUT×8
Sampling Rate	48 kHz
Sampling Bit-Depth	24bit
Function	
Audio Algorithm	ALC, AEC, ANS, HS, Automatic Mixing, Matrix Mixing, Noise Gate, COMP, Delay, PEQ
Audio Bit Rate	RTP 768000 bps, AES67 1152000 bps
Protection Function	Power Reverse Protection, Overcurrent Protection, Overvoltage Protection, Overload Protection
Network	
Network Protocol	AES67, TCP/IP, ICMP, HTTP, HTTPS, DNS, RTP, RTSP, RTCP, NTP, QoS, UDP, SSL/TLS, IEEE1588
Interface Protocol (API)	OTAP
Network Security	Password protection, complicated password, HTTPS encryption, basic and digest authentication for HTTP/HTTPS, security audit log, TLS 1.2/1.3
Audio	
Frequency Response	LINE IN (Phoenix terminal): 50 Hz to 20 KHz ± 1 dB
	3.5 mm TRS: 40 Hz to 4 KHz ± 1 dB
FIN (A-Weight)	LINE IN (Phoenix terminal): -88.13 dBV (20 Hz to 20 kHz, A-weighted, 100 Ω)
EIN (A-Weight)	3.5 mm TRS: -93.58 dBV (20 Hz to 20 kHz, A-weighted, 100 $\Omega)$
Total Harmonic Distortion (THD)	LINE IN (Phoenix terminal): 0.03% (1 KHz, 0 dBV, 0 dB analog gain)
Total Harmonic Distortion (Thb)	3.5 mm TRS: 0.1% (1 KHz, 0 dBV, 0 dB analog gain)
SNR (A-Weighted)	LINE IN (Phoenix terminal): 72.31 dB
	3.5 mm TRS: 74.5 dB
Interface	
Network Interface	RJ45 1000 M Ethernet port × 4
	1 Ethernet port is designed for connecting the audio processor to the network and
	supports Power over Ethernet (PoE) for powering the audio processor.
	3 Ethernet ports are designed for providing PoE power to external devices while also
	supporting data transmission.
Local Storage	Built-in 32 GB EMMC × 1, 2 GB DDR4 × 2
Audio In	LINE IN × 2, green phoenix terminal
	3.5 mm TRS × 1
Audio Out	LINE OUT × 2, green phoenix terminal
	3.5 mm TRS × 1




Light off: Less than -60 dBFS. Green: -59 dBFS to -24 dBFS. Yellow: -23 dBFS to -1 dBFS. Red: No less than 0 dBFS. 1 USB Audio Indicator: Light off: No USB device connected. White: The connected USB audio device is running normally. Flashing Red: The connected USB audio device is abnormal. 1 Power Indicator: Breathing White: The device is powering on and initializing. Solid White: The device is running normally Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset Support USB .0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		
Green: -59 dBFS to -24 dBFS. Yellow: -23 dBFS to -1 dBFS. Red: No less than 0 dBFS. 1 USB Audio Indicator: Light off: No USB device connected. White: The connected USB audio device is running normally. Flashing Red: The connected USB audio device is abnormal. 1 Power Indicator: Breathing White: The device is powering on and initializing. Solid White: The device is running normally Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset Support USB 3.0 × 3 TypeA × 1: For debugging TypeA × 1: For debugging TypeA × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by	LED Indicator	4 INPUT/OUTPUT Indicators:
Yellow: -23 dBFS to -1 dBFS. Red: No less than 0 dBFS. 1 USB Audio Indicator: Light off: No USB device connected. White: The connected USB audio device is running normally. Flashing Red: The connected USB audio device is abnormal. 1 Power Indicator: Breathing White: The device is powering on and initializing. Solid White: The device is running normally Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset Support USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM. 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		Light off: Less than -60 dBFS.
Red: No less than 0 dBFS. 1 USB Audio Indicator: Light off: No USB device connected. White: The connected USB audio device is running normally. Flashing Red: The connected USB audio device is abnormal. 1 Power Indicator: Breathing White: The device is powering on and initializing. Solid White: The device is running normally Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset Support USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) 13-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Dispay: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Power Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		Green: -59 dBFS to -24 dBFS.
LED Indicator Light off: No USB device connected. White: The connected USB audio device is running normally. Flashing Red: The connected USB audio device is abnormal. 1 Power Indicator: Breathing White: The device is powering on and initializing. Solid White: The device is running normally Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset Support USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) 13-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Dispay: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Power Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		Yellow: -23 dBFS to -1 dBFS.
Light off: No USB device connected. White: The connected USB audio device is running normally. Flashing Red: The connected USB audio device is abnormal. 1 Power Indicator: Breathing White: The device is powering on and initializing. Solid White: The device is running normally Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset Support USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		Red: No less than 0 dBFS.
Light off: No USB device connected. White: The connected USB audio device is running normally. Flashing Red: The connected USB audio device is abnormal. 1 Power Indicator: Breathing White: The device is powering on and initializing. Solid White: The device is running normally Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset Support USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		1 UCD Audio Indicators
White: The connected USB audio device is running normally. Flashing Red: The connected USB audio device is abnormal. 1 Power Indicator: Breathing White: The device is powering on and initializing. Solid White: The device is running normally Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset Support USB 3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		
Flashing Red: The connected USB audio device is abnormal. 1 Power Indicator: Breathing White: The device is powering on and initializing. Solid White: The device is running normally Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset Support USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		_
1 Power Indicator: Breathing White: The device is powering on and initializing. Solid White: The device is running normally Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset Support USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		
Breathing White: The device is powering on and initializing. Solid White: The device is running normally Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset Support USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Power Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		riasting Red. The connected OSB addio device is abnormal.
Breathing White: The device is powering on and initializing. Solid White: The device is running normally Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset Support USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Power Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		
Solid White: The device is running normally Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset Support USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		1 Power Indicator:
Flashing White (10 times): Device recognition is in progress (when there are multiple devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		Breathing White: The device is powering on and initializing.
devices in the system, click Identify Device on the client Flashing Red: Device fault. Reset USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Power Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		Solid White: The device is running normally
Flashing Red: Device fault. Reset Support USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		Flashing White (10 times): Device recognition is in progress (when there are multiple
Reset Support USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		devices in the system, click Identify Device on the client
USB3.0 × 3 TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		Flashing Red: Device fault.
TypeA × 1: For debugging TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by	Reset	Support
TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		USB3.0 × 3
TypeC × 2: One for connecting a USB camera, receiving image input; another for connecting to a computer or large screen, outputting audio and video. Compatibility Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by	an	TypeA × 1: For debugging
Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by	USB	TypeC × 2: One for connecting a USB camera, receiving image input; another for
Recommended system configuration for Audio Assistant Tool: Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		connecting to a computer or large screen, outputting audio and video.
Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 / Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by	Compatibility	
Windows(R) 8.1 / Windows(R) 11 CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		Recommended system configuration for Audio Assistant Tool:
CPU: Intel(R) i3-9100@4.2 GHz or above RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		Operating System: Windows(R) 10 (recommended), Compatible with Windows(R) 7 /
RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		Windows(R) 8.1 / Windows(R) 11
RAM: 4 GB and above Video Card: GT1030 D5 HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by	System Requirement	CPU: Intel(R) i3-9100@4.2 GHz or above
HDD: 20 GB Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		RAM: 4 GB and above
Display: 1920 × 1080 and above General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Power Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		Video Card: GT1030 D5
General Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Power Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		HDD: 20 GB
Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output); Power Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by		Display: 1920 × 1080 and above
Power Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by	General	
	Power	Input: Dual power inputs, PoE: 802.3at or Max. DC 48 V 1.5 A (including PoE output);
DC)		Output: 3-port PoE: 802.3at, total output: 40 W (supported only when powered by
UCJ.		DC).
Main body: Metal	Material	Main body: Metal
Base: Metal		Base: Metal
Dimension 233 mm × 200 mm × 45 mm (9.17" × 7.87 × 1.77")	Dimension	233 mm × 200 mm × 45 mm (9.17" × 7.87 × 1.77")
Weight Approx. 1.9 kg (4.2 lb.)	Weight	Approx. 1.9 kg (4.2 lb.)
Operating Condition -10 °C to 50 °C (14 °F to 122 °F). Humidity 90% or less (non-condensing)	Operating Condition	-10 °C to 50 °C (14 °F to 122 °F). Humidity 90% or less (non-condensing)
Package Dimension 374 mm × 345 mm × 90 mm (14.72" × 13.58 × 3.54")	Package Dimension	374 mm × 345 mm × 90 mm (14.72" × 13.58 × 3.54")
With Package Weight Approx. 3.04 kg (6.7 lb.)	With Package Weight	Approx. 3.04 kg (6.7 lb.)
Color Gray		Grav
Installation Cabinet installation and under-table or wall mounting	Color	
System Language English	Color Installation	·



Available Model

DS-QAPPU1212-N

Dimension

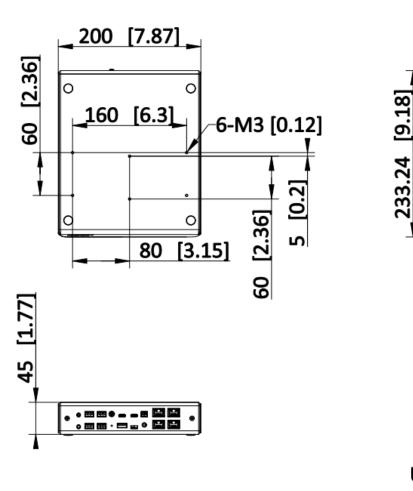



Unit: mm [inch]

SCALE 1:1

See Far, Go Further



www.hikvision.com support@hikvision.com















