

DS-QAE0A360G1-V6/ENB
360W EVAC Backup Amplifier





- Backup amplifier for the public address and voice alarm system

▪ Specification

Audio	
Frequency Response	50 Hz-16 KHz, ±3 dB
THD and SNR	THD: ≤0.7% (1KHz) SNR: ≥85 dB
Audio Output	2PIN terminal blocks used to connect with devices such as DS-QAE0A360G1-V6/EN / DS-QAE0A360G1-V6/ENEX
Input	1 RJ45 port used to devices such as DS-QAE0A360G1-V6/ENEX/DS-QAE0A360G1-V6/ENEX,CAT5E-STP cable recommended.
General	
Power	AC 220-240V~, 50/60Hz, 360 W
Dimension	440x402x130 mm
Weight	17 kg
Packing List	Standby Amplifier x1; Power Line x1; Terminal 2pin x1;
Operating Temperature	-5°C~45 °C
Power Consumption	750 W Max
DC Power 24V	2 groups of 24V terminal blocks which used for external backup power supply.

▪ Dimension

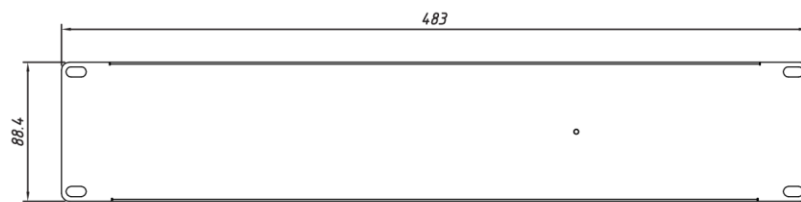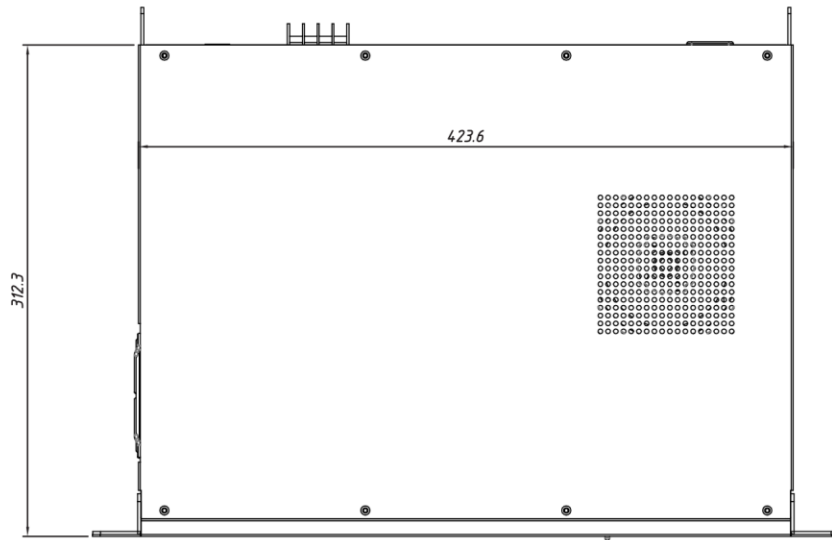

See Far, Go Further



www.hikvision.com
support@hikvision.com

