

THC-B120-M 2 MP Fixed Mini Bullet Camera



- 1080p bullet camera
- Smart IR: up to 20 m IR distance
- Water and dust resistant (IP66)
- 4 in 1 (4 signals switchable TVI/AHD/CVI/CVBS).

▪ Specification

Camera	
Image Sensor	2 MP CMOS
Max. Resolution	1920 (H) × 1080 (V)
Min. Illumination	0.01 Lux@(F2.0, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s;NTSC: 1/30 s to 1/50,000 s
Day & Night	IR Cut Filter
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 180°, Rotation: 0 to 360°
Signal System	PAL/NTSC
Lens	
Lens Type	2.8 mm, 3.6 mm and 6 mm
Focal Length & FOV	103° (2.8 mm), 80.7° (3.6 mm), 50.1° (6 mm)
Lens Mount	M12
Illuminator	
Supplement Light Type	IR
Supplement Light Range	Up to 20 m
Image	
Image Settings	Brightness,Mirror,Smart IR,Sharpness,AGC
Frame Rate	PAL: 1080p@25 fps NTSC: 1080p@30 fps
Day/Night Mode	Auto/Color/BW (Black and White)
Wide Dynamic Range (WDR)	Digital WDR
Image Enhancement	BLC
Noise Reduction	2D DNR
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS,1 HD analog output
General	
Power	12 VDC ± 15%, max. 4 W
Material	Metal
Dimension	157.8 mm × 60.9 mm × 57.9 mm (6.21" × 2.40" × 2.28")
Weight	290 g (0.64 lb.)
Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F), humidity 90% or less (non-condensing)
Language	English
Approval	
Protection	IP66

▪ Available Model

THC-B120-M(2.8mm)


THC-B120-M(3.6mm)

THC-B120-M(6mm)

THC-B120-M(2.8mm)(TUR Tesan)

THC-B120-M(2.8mm)(NZL PB)

▪ Dimension

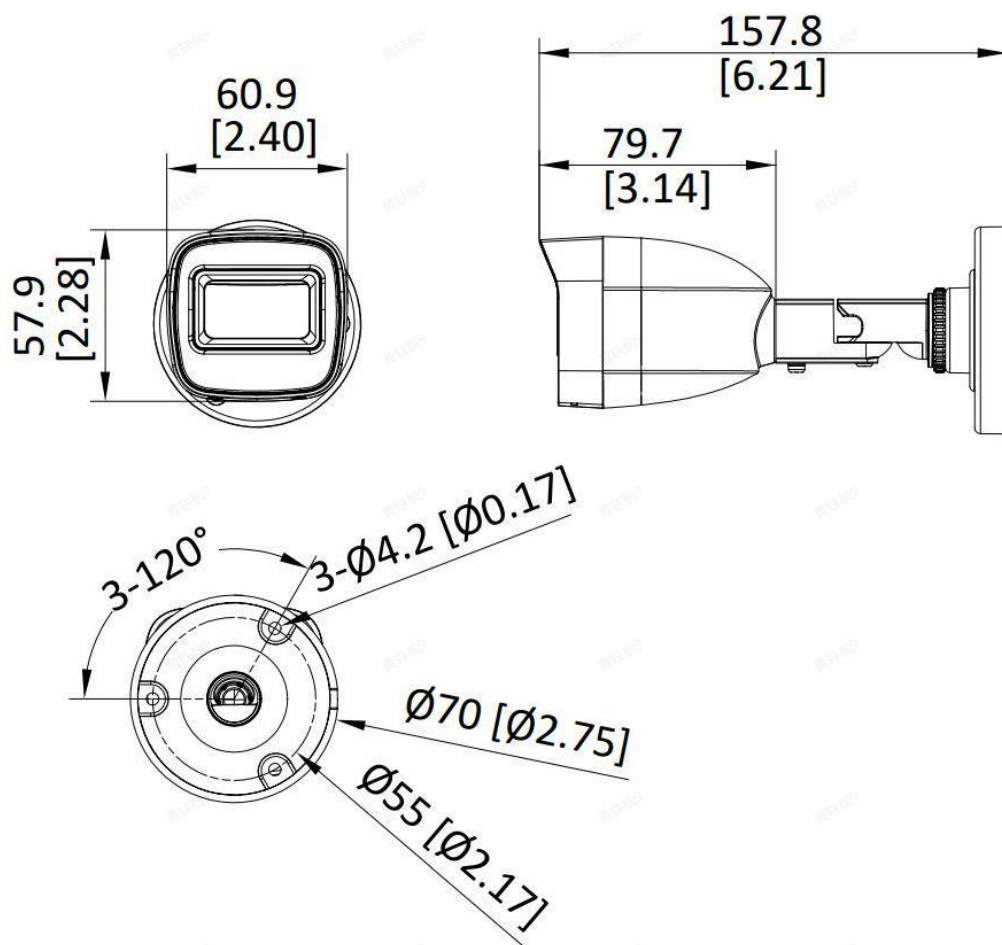

▪ Accessory


▪ Optional

HIA-J101



▪ Installation Methods

Junction Box
HIA-J101



See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HiLook