

## DS-QASIGNAL/EN Signal Collector



- Work as a signal collector which can support hand-to-hand connection.
- Up to 48 PCS of DS-QASIGNAL/EN which can be connected to the DS-QAE0A360G1-V6/EN.
- Up to 32 PCS of DS-QAEOLS/EN(single LF or HF speaker detect module) which can be connected to DS-QASIGNAL/EN.


## ▪ Specification

Audio	
Max. Transmission Distance	RS485: 1000 meters. PowerBus: 1000 meters
Protocol	RS485,PowerBus.
BUS INPUT	4 PIN screw terminal used to connect with device "DS-QAE0A360G1-V6/EN" to communicate with the host (24V related voltage) within communication range 1000 meters.
BUS OUTPUT	4 PIN screw terminal used to connect with device "DS-QASIGNAL/EN" to communicate with the cascaded device (24V related voltage) within communication range 1000 meters.
PB BUS OUTPUT	2PIN screw terminal used to connect with device"DS-QAEOLS/EN" to communicate with subdevice(24V related voltage) within communication range 1000 meters.
General	
Power	24V DC, DS-QAE0A360G1-V6/EN Powered by the host
Dimension	139x89x46 mm
Weight	0.25 kg
Packing List	Repeater x1;
Operating Temperature	-5°C~45 °C
Power Consumption	<2.4W

## ▪ Available Model

DS-QASIGNAL/EN

## ▪ Dimension

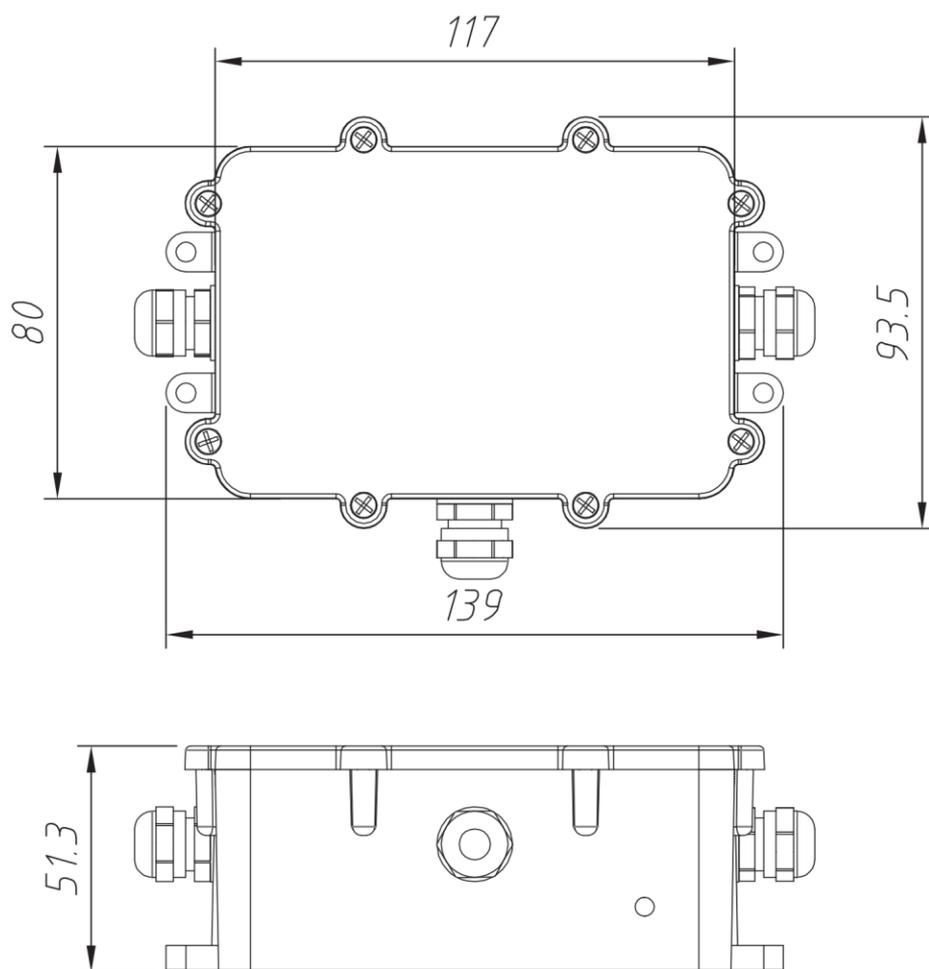

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

