

THC-T220-M 2 MP Fixed Turret Camera



- 1080p turret camera
- Smart IR: up to 40 m IR distance
- Water and dust resistant (IP66)
- 4 in 1 (4 signals switchable TVI/AHD/CVI/CVBS).

▪ Specification

Camera	
Image Sensor	2 MP CMOS
Max. Resolution	1920 (H) × 1080 (V)
Min. Illumination	Color: 0.01 Lux@(F1.2, AGC ON), B/W: 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Day & Night	IR Cut Filter
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
Signal System	PAL/NTSC
Lens	
Lens Type	2.8 mm, 3.6 mm, 6 mm
Focal Length & FOV	Horizontal FOV 103° (2.8 mm), 80.7° (3.6 mm), 50.1° (6 mm)
Lens Mount	M12
Illuminator	
Supplement Light Range	IR Distance: Up to 40 m
Smart Supplement Light	Yes
Image	
Image Settings	Brightness, Mirror, Sharpness, AGC
Frame Rate	PAL: 1080p@25fps, NTSC: 1080p@30fps
Day/Night Mode	Auto/Color/BW (Black and White)
Wide Dynamic Range (WDR)	Digital WDR
Image Enhancement	BLC
Noise Reduction	2D DNR
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS, 1 HD analog output
General	
Power	12 VDC ±15%, Max. 4 W
Material	Metal
Dimension	Ø127.9mm × 90mm (Ø5.04" × 3.54")
Weight	Approx. 450 g (0.99 lb.)
Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensing)
Language	English
Approval	
Protection	IP66


▪ Available Model

THC-T220-M(2.8mm)

THC-T220-M(3.6mm)

THC-T220-M(6mm)

▪ Dimension

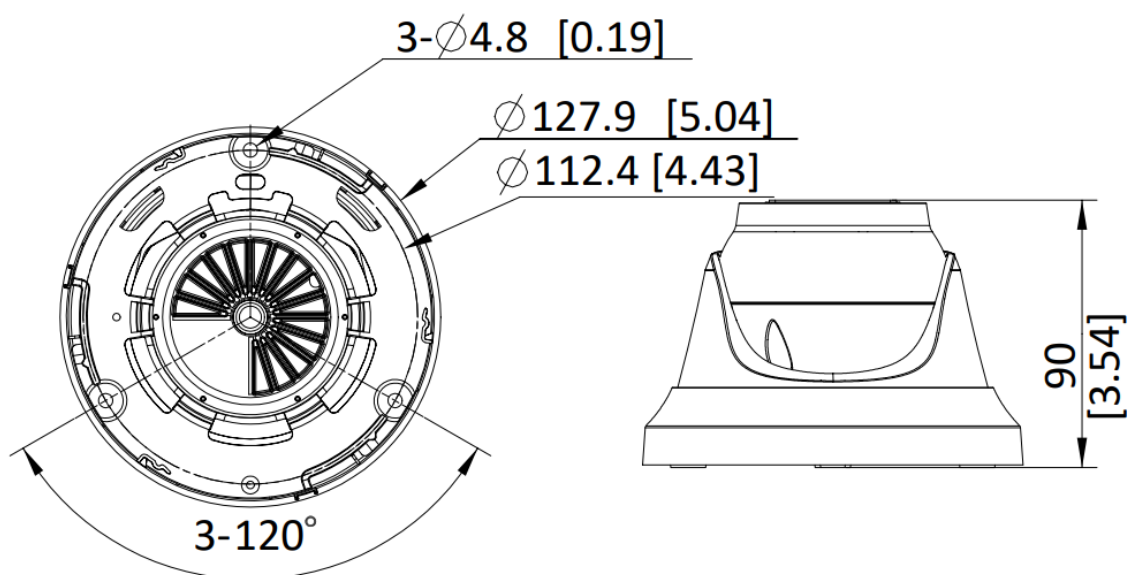

▪ Accessory

▪ Optional

HIA-J103	HIA-B101-130T	HIA-B402-130T	HIA-J202
			

▪ Installation Methods

Junction Box HIA-J103	Pendant Mounting HIA-B101-130T	Wall Mounting HIA-B402-130T	Inclined Ceiling Mounting HIA-J202
			

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HiLook