

DS-8104AHGH(L)I-E4
4-ch 720P H.264 ATM DVR




- 4 channels and 4 HDDs ATM DVR
- H.264+ video compression technology
- Encoding ability up to 720p @ 25/30 fps
- Up to 4 network cameras can be connected
- Supports overlapping multiple ATM card numbers and multiple protocols
- Supports triggering recording once inserting ATM card
- Supports triggering recording through ATM transaction behaviors
- Privacy mask for masking specific regions and protecting sensitive information

▪ Specification


Recording	
Video compression	H.264+/H.264
Encoding resolution	720p/WD1/VGA/4CIF/CIF
Frame rate	25 fps (P) / 30 fps (N),
Video bit rate	32 Kbps to 6 Mbps/3072 Kbps
Stream type	Video, Video & Audio
Audio compression	G.711u
Audio bit rate	64 Kbps
Video and Audio	
IP video input	0-ch (up to 4-ch)
Analog video input	4-ch;BNC interface (1.0 Vp-p, 75 Ω), TVI/CVBS self-adaptive
HDMI/VGA output	1-ch, 1024×768/60Hz, 1280×720/60Hz, 1280×1024/60Hz, 1920×1080p/60Hz
Audio input	4-ch, BNC (2.0 Vp-p, 1 kΩ)
Audio output	1-ch, RCA (Linear, 1 KΩ)
Two-way audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input)
Synchronous playback	4-ch
HDTVI input	1080P25, 1080P30, 720P25, 720P30, CVBS
LCD	Support
Network	
Network interface	2, RJ45 10M/100M/1000M Ethernet interface
Auxiliary interface	
SATA	4 SATA interfaces
Capacity	Up to 6 TB capacity for each disk
Alarmin/out	9/4
USB interface	2 × USB 2.0
General	
Power supply	100 to 240 VAC
Working temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Working humidity	10% to 90%
Dimensions (W × D × H)	180 × 280 × 182 mm (7.1 × 11.0 × 7.2 inch)
Weights (without HDD)	≤ 5 kg (11 lb)
Consumption(without HDD)	≤ 50 W

▪ Physical Interface

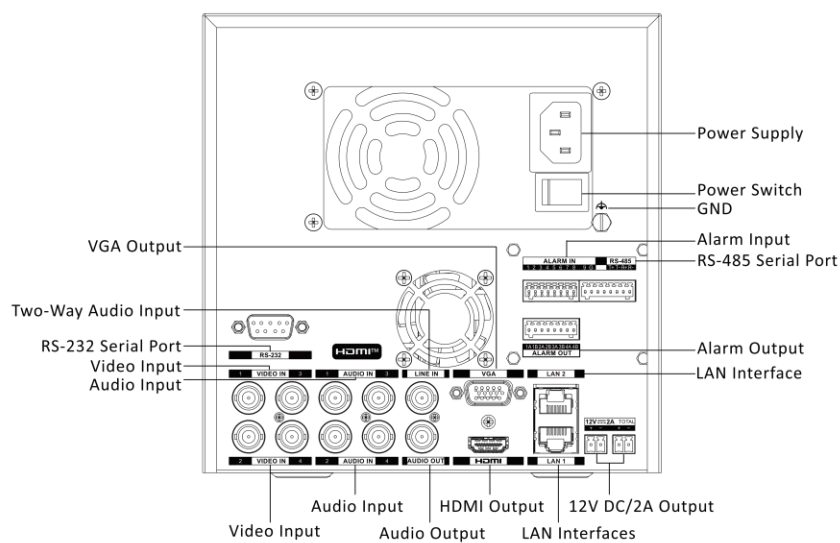

无法显示链接的图像。该文件可能已被移动、重命名或删除。请验证该链接是否指向正确的文件和位置。

▪ Dimension

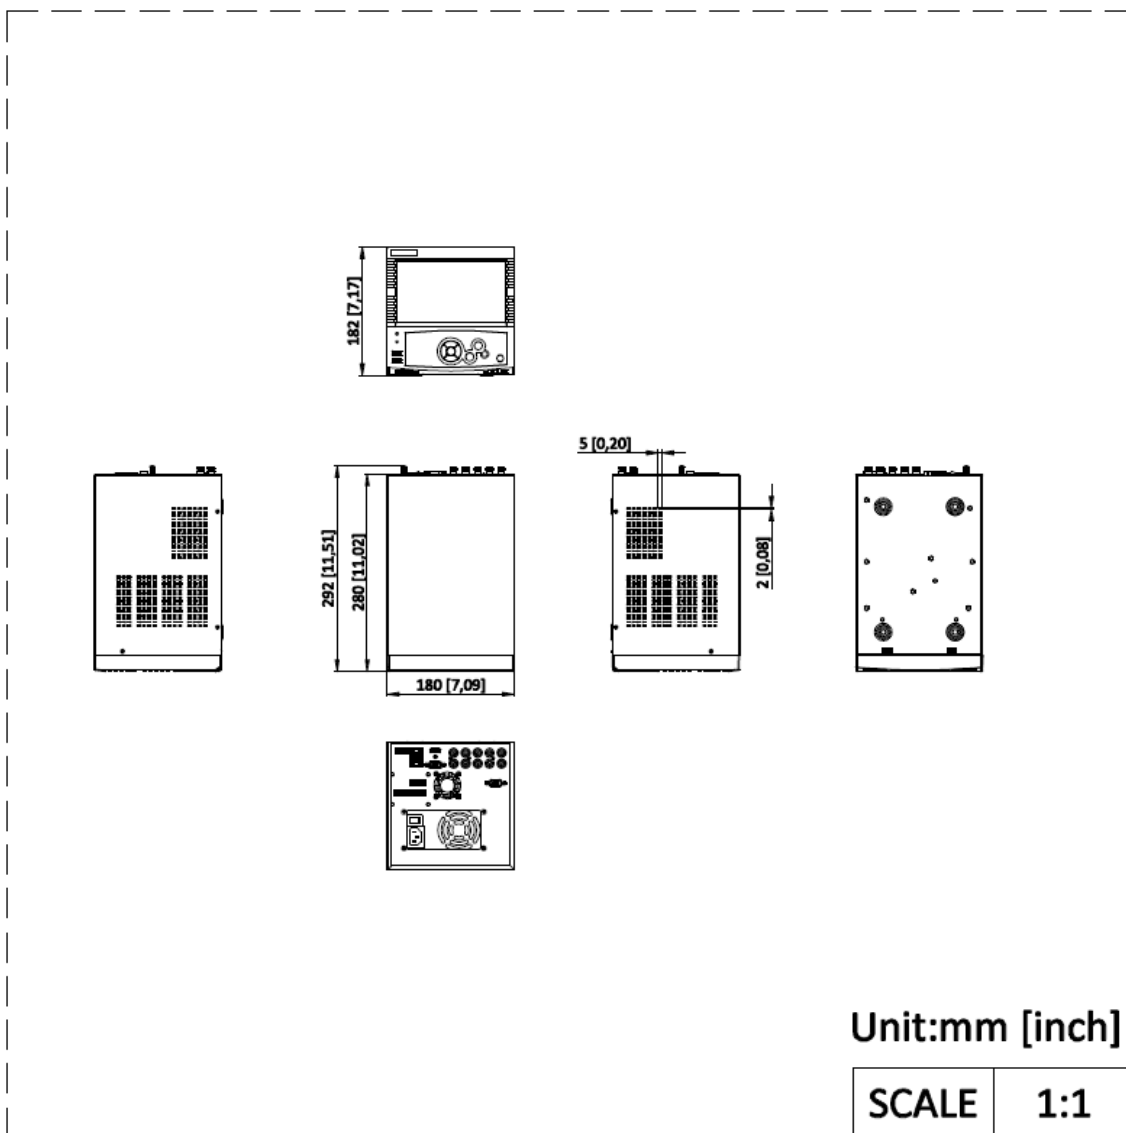

See Far, Go Further



www.hikvision.com
support@hikvision.com

