

DS-QAE0BGM/EN Audio Player




- When the system broadcasts an emergency message, it automatically triggers recording.
- USB Playback/Timing playback.
- Available to setup 100 timed commands to playback under period of weekly or yearly mode.
- Single way of RCA used to link with external audio input.
- Available to be linked with 3rd-part fire system through RS485 port.

▪ Specification

Functions	
Other	Support GPS Time Calibration SD Card Playback/Record Support GPIO Control Input/Output
Audio	
Frequency Response	20Hz-20KHz, ± 3 dB
Audio Sampling Rate	48K
USB	USB Port1 With Build-In FLASH : Update voice messages; USB Port2 :When the device is used individually, it can connect with computer through the port to upgrade firmware version;
Signal-to-Noise Ratio (SNR)	93dB
Interface	
MicroSD	Support SD Card Playback/Record
General	
Power	AC Input: 100-240V AC, 50/60Hz; Power Consumption: 20W; Fuse: 1A
Dimension	44x483x189 mm
Weight	2.8 kg
Packing List	Timing Media Player x1; Power Line x1;
Operating Temperature	-5°C~45 °C

▪ Dimension

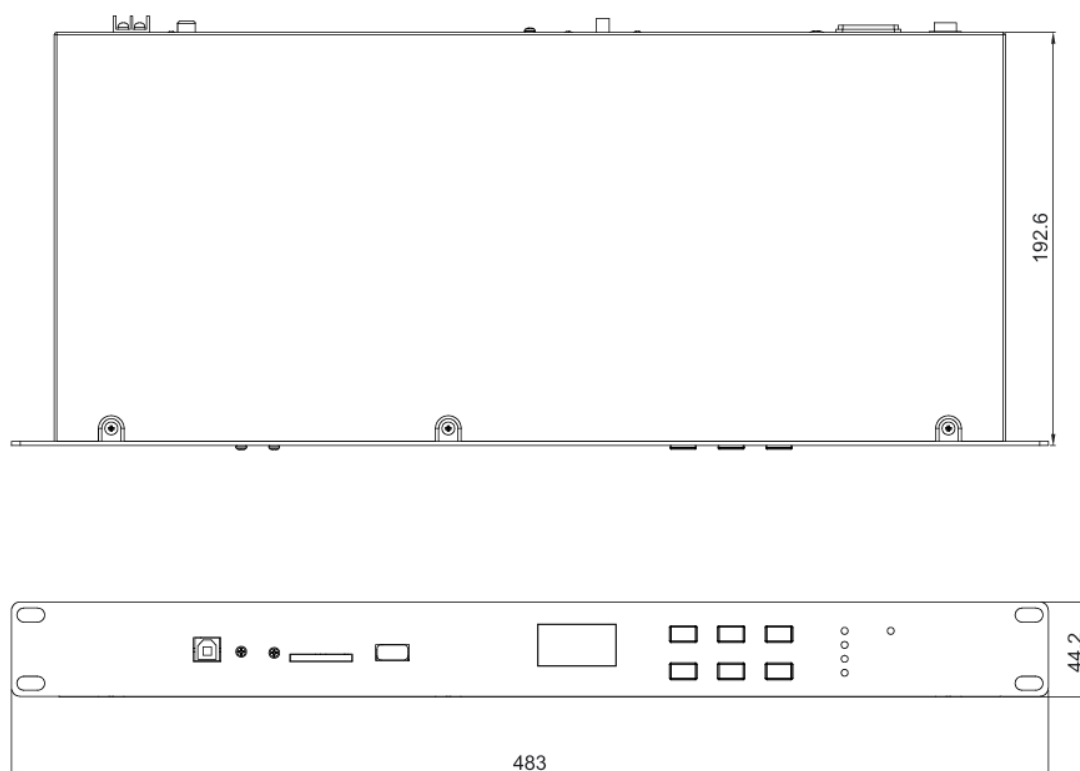

See Far, Go Further



www.hikvision.com
support@hikvision.com

