

HWP-T4215I-D**2 MP 15X Powered by DarkFighter IR Analog Speed Dome**

- Four-inch 2 MP camera with pan, tilt and zoom (15x) ability
- Clear imaging against strong back light
- Excellent night-time performance with up to 100 m enhanced IR
- Water and dust resistant (IP66).

▪ Specification

Lens	
FOV	Horizontal field of view: 53.8° to 4.0° (wide to tele)
Focal Length	5 mm to 75 mm, 15× Optical
Zoom Speed	Approx. 2.4 s (optical, wide to tele)
Working Distance	10 mm to 1500 mm (wide to tele)
Aperture Range	F 1.6 to F 3.5
Video	
Max. Resolution	1920 × 1080
Camera Module	
Frame Rate	50Hz: 25fps @(1920 × 1080), 60Hz: 30fps @(1920 × 1080)
AGC	Auto/Manual
DNR	3D DNR
Image Sensor	1/2.8" progressive scan CMOS
Model	HWP-T4215I-D(C)
Min. Illumination	Color: 0.005 Lux @(F1.6, AGC ON), B/W: 0.001 Lux @(F1.6, AGC ON), 0 Lux with IR
White Balance	Auto/Hauto/Manual/ATW/Indoor/Outdoor
Shutter Time	PAL: 1/1 s to 1/10,000 s, NTSC: 1/1 s to 1/10,000 s
Day & Night	IR cut filter
Privacy Mask	8 programmable privacy masks
Focus Mode	Auto/Semiauto/Manual
WDR	≥ 120 dB
PTZ	
Movement Range (Pan)	360° endless
Pan Speed	Pan manual speed: 0.1° to 80°/s, Pan preset speed: 80°/s
Movement Range (Tilt)	-15° to 90° (auto flip)
Tilt Speed	Tilt manual speed: 0.1° to 80°/s, Tilt preset speed: 80°/s
Proportional Zoom	Rotation speed can be adjusted automatically according to zoom multiples
Presets	256
Patrol Scan	10 patrols, up to 32 presets per patrol
Pattern Scan	5 patterns, with the total recording time no less than 10 minutes
Power-off Memory	Support
Park Action	Preset/Patrol/Pattern/Pan Scan/Tilt Scan/Panorama Scan/Day Mode/Night Mode/None
PTZ Status Display	ON/OFF
Preset Freezing	Support
Scheduled Task	Preset/Patrol/Pattern/Pan Scan/Tilt Scan/Panorama Scan/Day Mode/Night Mode/Zero Calibration/None

▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION.

Level	Description
Top-level protection	Hikvision products at this level are equipped for use in

	areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.
Moderate protection	Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain.
No specific protection	Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.

▪ Available Model

HWP-T4215I-D(E)

HWP-T4215I-D

HWP-T4215I-D(D)

HWP-T4215I-D(C)















▪ Accessory

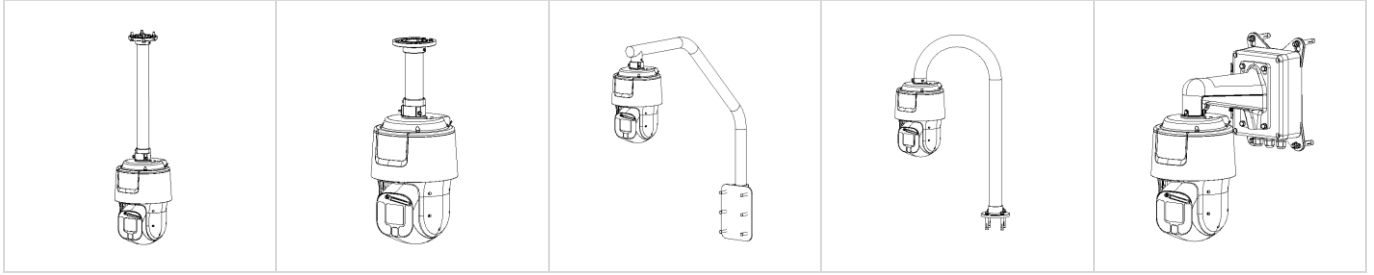
▪ Optional

DS-1673ZJ	DS-1604ZJ-BOX-PO LE	DS-1604ZJ-BOX-CO RNER	DS-1604ZJ	DS-1684ZJ
				
DS-1604ZJ-corner	DS-1667ZJ	DS-1660ZJ	DS-1663ZJ	DS-1674ZJ
				
DS-1618ZJ	DS-4660ZJ-WC	DS-1662ZJ	DS-1619ZJ	DS-1604ZJ-box
				

DS-1661ZJ	DS-1604ZJ-pole	DS-4650ZJ-WC	DS-1276ZJ	DS-1602ZJ
				

■ Installation Methods

Horizontal Pole Mounting DS-1673ZJ+DS-1662ZJ	Vertical Pole Mounting DS-1604ZJ-BOX-POLE	Vertical Pole Mounting DS-1684ZJ+DS-1602ZJ	Vertical Pole Mounting DS-1604ZJ-pole	Vertical Pole Mounting DS-4650ZJ-WC+DS-1602ZJ+DS-1674ZJ
				
Corner Mounting DS-1604ZJ-BOX-CORNER	Corner Mounting DS-1604ZJ-corner	Corner Mounting DS-4660ZJ-WC+DS-1602ZJ+DS-1674ZJ	Corner Mounting DS-1276ZJ+DS-1602ZJ	Wall Mounting DS-1604ZJ
				
Wall Mounting DS-1618ZJ	Wall Mounting DS-1604ZJ-box	Wall Mounting DS-1602ZJ	Pendant Mounting DS-1667ZJ	Pendant Mounting DS-1663ZJ
				
Pendant Mounting DS-1662ZJ	Pendant Mounting DS-1661ZJ	Gooseneck Mounting DS-1660ZJ	Gooseneck Mounting DS-1619ZJ	Junction Box DS-1674ZJ+DS-1602ZJ
				



See Far, Go Further



www.hikvision.com
support@hikvision.com

