

## **DS-6704HUHI** **4-ch 5 MP H.265 DVS**




- Up to 4 analog cameras can be connected
- Efficient H.265+ compression technology
- Encoding ability up to 5 MP @ 12 fps
- 4 signals input adaptively (HDTVI/AHD/CVI/CVBS)
- Supports Micro SD card, up to 128 GB capacity

## ▪ Specification

| Video and Audio       |                                                                                                                                                        |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Analog Video Input    | 4-ch<br>BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection                                                                                |
| HDTVI Input           | 5MP, 4MP, 3MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25                                                                                        |
| AHD Input             | 1080p25, 1080p30, 720p25, 720p30                                                                                                                       |
| HDCVI Input           | 1080p25, 1080p30, 720p25, 720p30                                                                                                                       |
| CVBS Input            | PAL/NTSC                                                                                                                                               |
| Audio Input           | 1-ch, green-pin interfaces (2.0 Vp-p, 1 KΩ)                                                                                                            |
| Audio Output          | 1-ch, 3.5mm interface (Linear, 1 KΩ)                                                                                                                   |
| Two-Way Audio         | 1-ch, 3.5mm interface (2.0 Vp-p, 1 KΩ)                                                                                                                 |
| Synchronous Playback  | 4-ch                                                                                                                                                   |
| Recording             |                                                                                                                                                        |
| Video Compression     | MJPEG (sub-stream)/H.265+/H.265/H.264+/H.264                                                                                                           |
| Encoding Resolution   | 5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF                                                                                                             |
| Frame Rate            | Main stream:<br>5 MP@12fps/4 MP@15fps/3 MP@18fps<br>1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)<br>Sub-stream:<br>WD1/4CIF/CIF@25fps (P)/30fps (N) |
| Video Bitrate         | 32 Kbps to 10 Mbps                                                                                                                                     |
| Dual-stream           | Support                                                                                                                                                |
| Audio Compression     | G.711u                                                                                                                                                 |
| Audio Bitrate         | 64 Kbps                                                                                                                                                |
| Network               |                                                                                                                                                        |
| Network Protocol      | TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, NFS, UPnP™, HTTPS, ONVIF profile S                                                                    |
| Network Interface     | 1, RJ45 10M/100M self-adaptive Ethernet interface                                                                                                      |
| Auxiliary Interface   |                                                                                                                                                        |
| SD Card               | 1 Micro SD card slot, support Micro SD card                                                                                                            |
| Capacity              | 8G Up to 128 GB                                                                                                                                        |
| Serial Interface      | RS-485 (half-duplex); RS-232                                                                                                                           |
| Alarm In/Out          | 4/2                                                                                                                                                    |
| General               |                                                                                                                                                        |
| Power Supply          | 12 VDC, 1.25 A                                                                                                                                         |
| Consumption           | ≤ 15W                                                                                                                                                  |
| Working Temperature   | -10 °C to +55 °C (+144 °F to +131 °F)                                                                                                                  |
| Working Humidity      | 10% to 90%                                                                                                                                             |
| Dimension (W × D × H) | 114 × 165 × 48 mm (4.5 × 6.5 × 1.9 inch)                                                                                                               |
| Weight                | ≤ 1.5 kg (3.3 lb)                                                                                                                                      |

## ▪ Dimension

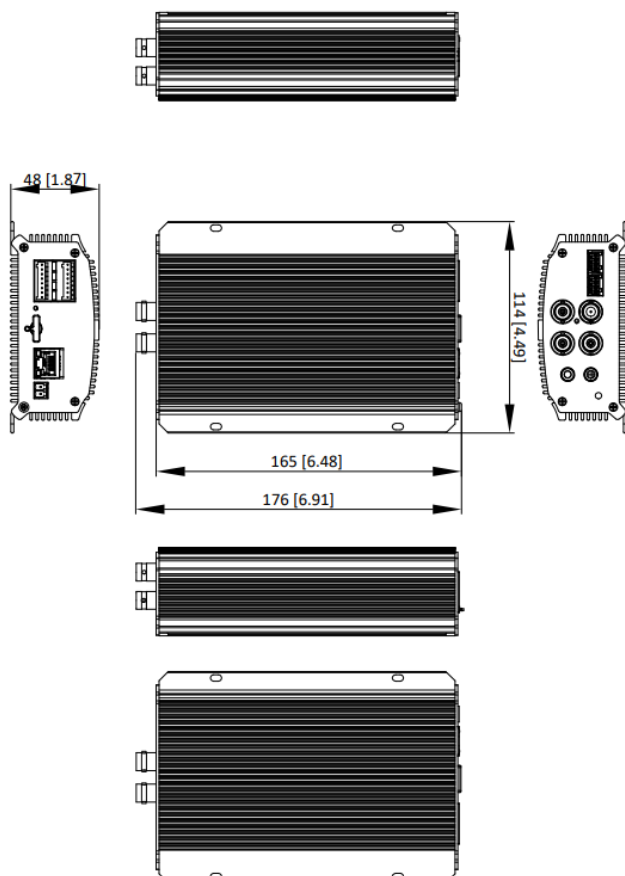

Unit:mm [inch]

SCALE 1:1

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

