DS-TMT1A0
2M Video-intercom Dark-grey




- Alloy with surface spray treatment
- Adopts waterproof design
- Design of the cap enables convenient wring

▪ Specification

Authentication	
Card Reading Distance	0 - 3 cm
Capacity	
Card Capacity	10000
Video Intercom	
Resolution	Main stream: 1920 × 1080p Sub stream: 640 × 480p
Network	
Interface Protocol	TCP/IP, RSTP, ipv6, onvif
Card Reader	
Card Reader Type	M1 card
Card Reader Frequency	13.56 MHz
Interface	
Relay Output	1
Alarm Input	4
RS-485	1
Network Interface	1
General	
Working Temperature and Humidity	-40 ℃ to 55 ℃(-40 °F to 131 °F) 10% to 95% (no-condensing)
Power Supply	POE
Power Consumption	< 10 W
Dimensions	150 × 80 × 1224 mm (5.91 × 3.15 × 48.19 inch)
Weight	4 kg (8.82 lb.)
Weight (with Package)	6 kg (13.23 lb.)
Dimensions (with Package)	258 × 248 × 1293 mm (10.16 × 9.6 × 50.91 inch)

▪ Dimension

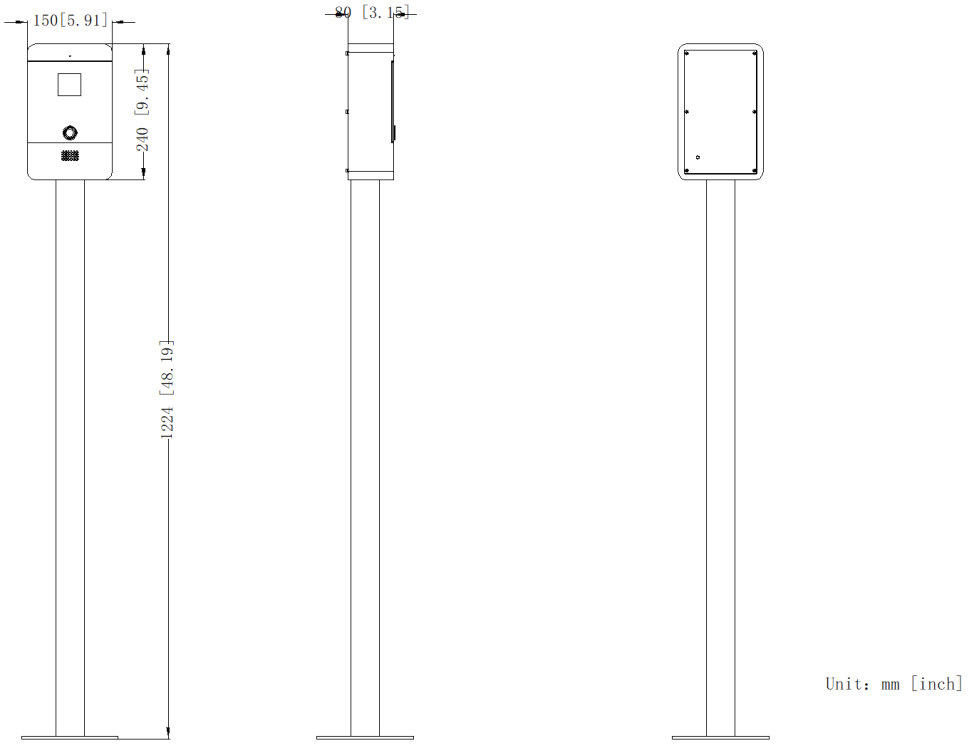

Unit: mm [inch]

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®