

DS-TVL121-6-5D

- Equipped with standard RS485/RJ45 communication mode
- LED module supports shift left, shift up, upward expanding, downward expanding, Real-time display
- LED module supports 7 colors display, Remaining parking number display
- Mounting mode: Hoisting
- Logic address 0~255


▪ Specification

Display Screen	
Display Content	Support 6 numbers 2 arrow display
Display Color	Red/Green/Yellow/Blue/Cyan/Magenta/White
Display Mode	Shift left, Shift up, Upward expanding, Downward expanding
Scanning Mode	1/16 A Model Scanning
Display Icon	Pregnant Women/Disabled/Women/Charging
Communication Mode	RS485/RJ45
General	
Power Supply	110 VAC – 220 VAC
Power Consumption	Max. 28W
Dimensions	1133 × 226 × 89 mm (44.6 × 8.9 × 3.5 inch)
Weight	8 kg (17.6 lb.)
Weight (with Package)	12.1 kg (26.7 lb.)
Dimensions (with Package)	1220 × 350 × 150 mm (48.0 × 13.8 × 5.9 inch)

▪ Available Model

DS-TVL121-6-5D

▪ Dimension

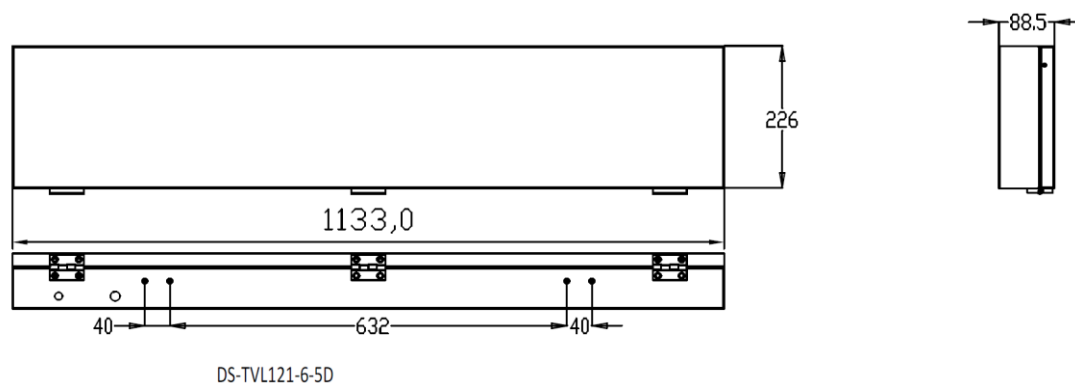



See Far, Go Further



www.hikvision.com
support@hikvision.com

