

DS-TVL121-9-5D



- Equipped with standard RS485/RJ45 communication mode
- LED module supports shift left, shift up, upward expanding, downward expanding, Real-time display
- LED module supports 7 colors display, Remaining parking number display
- Mounting mode: Hoisting
- Logic address 0~255




Specification

Display Screen	
Display Content	Support 9 numbers 3 arrow display
Display Color	Red/Green/Yellow/Blue/Cyan/Magenta/White
Display Mode	Shift left, Shift up, Upward expanding, Downward expanding
Scanning Mode	1/16 A Model Scanning
Display Icon	Pregnant Women/Disabled/Women/Charging
Communication Mode	RS485/RJ45
General	
Power Supply	110 VAC – 220 VAC
Power Consumption	Max. 50W
Dimensions	1682 × 226 × 89 mm (66.2 × 8.9 × 3.5 inch)
Weight	11.3 kg (24.9 lb.)
Weight (with Package)	15.4 kg (34.0 lb.)
Dimensions (with Package)	1760 × 360 × 150 mm (69.3 × 14.2 × 5.9 inch)

Available Model

DS-TVL121-9-5D

Dimension

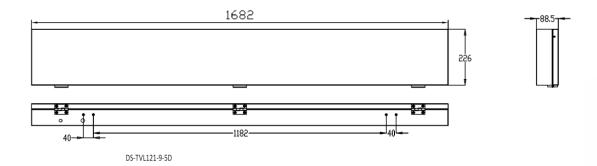



See Far, Go Further



www.hikvision.com support@hikvision.com















