

DS-2CE17D0T-IT3FS 2 MP Audio Fixed Bullet Camera




- High quality imaging with 2 MP, 1920 × 1080 resolution
- 2.8 mm, 3.6 mm, 6 mm fixed focal lens
- Up to 40 m IR distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)
- High quality audio with audio over coaxial cable, built-in mic

▪ Specification

Camera	
Image Sensor	2 MP CMOS
Max. Resolution	1920 (H) × 1080 (V)
Signal System	PAL/NTSC
Frame Rate	TVI: 1080p @ 25 fps/30 fps CVI: 1080p @ 25 fps/30 fps AHD: 1080p @ 25 fps/30 fps CVBS: PAL/NTSC
Min. Illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Slow Shutter	Max. 16 times
Lens Mount	M12
Day & Night	IR Cut Filter
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 180°, Rotation: 0° to 360°
Lens	
Lens Type	2.8 mm, 3.6 mm, 6 mm fixed focal lens
Focal Length & FOV	2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8°
Image	
Image Parameters Switch	STD/HIGH-SAT
Image Settings	Brightness, Smart IR, Sharpness
Wide Dynamic Range (WDR)	Digital WDR
Image Enhancement	DWDR, BLC, HLC, Global
AGC	Yes
Day/Night Mode	Auto/Color/BW (Black and White)
White Balance	Auto/Manual
Noise Reduction	2D DNR
Language	English
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
Built-in Microphone	Yes
General	
Operating Condition	-40°C to 60°C (-40°F to 140°F), humidity: 90% or less (non-condensing)
Power Supply	12 VDC ± 25%,
Consumption	Max. 4.2 W
Material	Front cover: Metal, Main body: Plastic
IR Range	Up to 40 m
Communication	HIKVISION-C
Dimension	216.2 mm × 78.9 mm × 75.4 mm (8.51" × 3.10" × 2.97")
Weight	Approx. 328 g (0.72 lb.)
Approval	
Protection	IP67

▪ Dimension

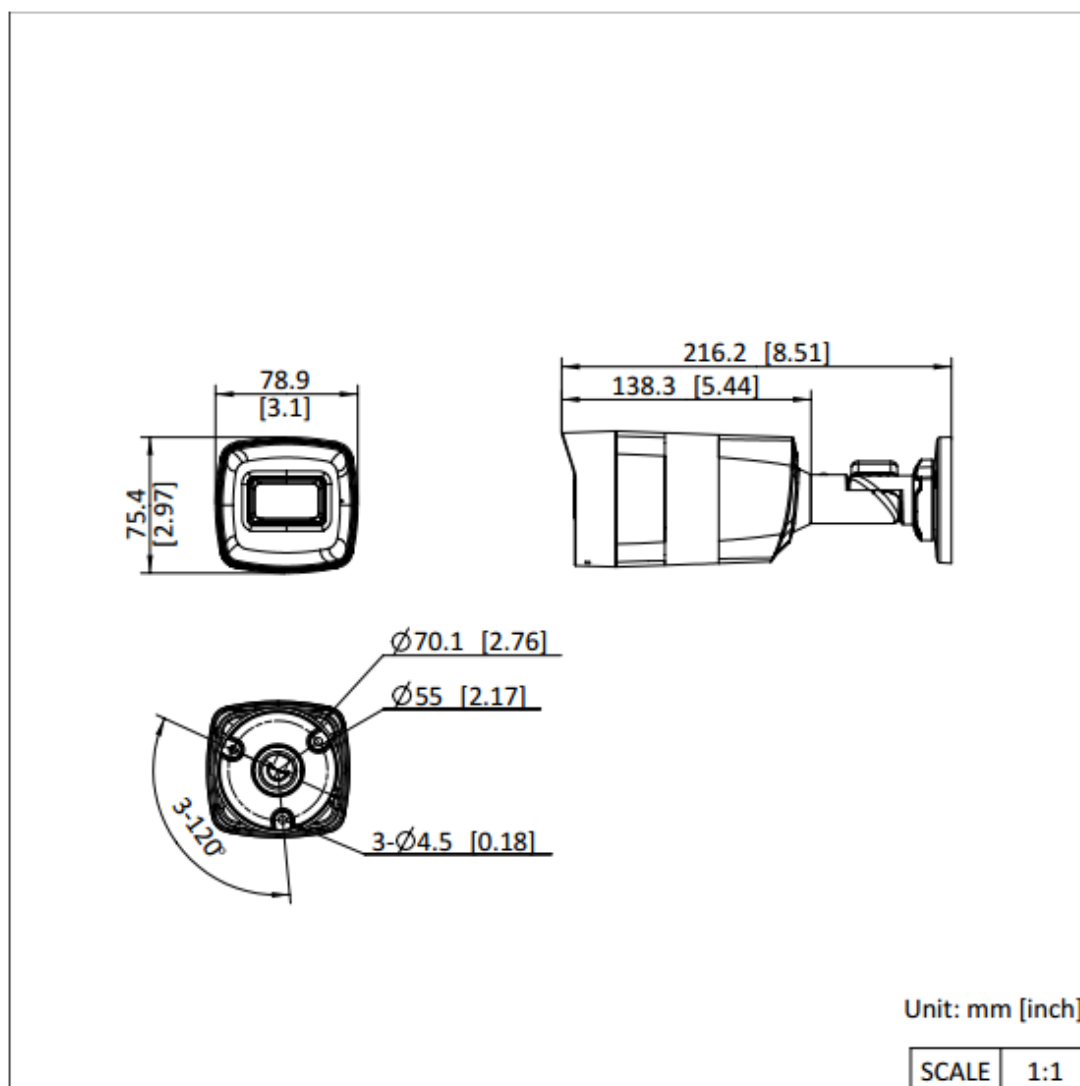

▪ Accessory

▪ Optional

DS-1280ZJ-XS



▪ Installation Methods

Junction Box
DS-1280ZJ-XS



See Far, Go Further



www.hikvision.com
support@hikvision.com

