

## DS-2CE10HFT-E 5 MP ColorVu PoC Fixed Mini Bullet Camera



- High quality imaging with 5 MP, 2560 × 1944 resolution
- 24/7 color imaging
- Clear imaging against strong back light due to 130 dB true WDR technology
- 3D DNR technology delivers clean and sharp images
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Light, up to 20 m white light distance
- Water and dust resistant (IP67)

## ▪ Specification


| Camera                   |   |
|--------------------------|---|
| Image Sensor             | 5 MP CMOS   |
| Max. Resolution          | 2560 (H) × 1944 (V)   |
| Min. Illumination        | 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light   |
| Shutter Time             | PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s   |
| Angle Adjustment         | Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360°  |
| Signal System            | PAL/NTSC  |
| Lens                     |   |
| Lens Type                | 2.8 mm, 3.6 mm fixed focal lens   |
| Focal Length & FOV       | 2.8 mm, horizontal FOV: 99.7°, vertical FOV: 72°, diagonal FOV: 139.8°<br>3.6 mm, horizontal FOV: 80.1°, vertical FOV: 58.6°, diagonal FOV: 106.2°      |
| Illuminator              |   |
| Supplement Light Type    | White Light   |
| Supplement Light Range   | Up to 20 m  |
| Smart Supplement Light   | Yes   |
| Supplement Light Type    | White Light   |
| Image                    |   |
| Image Parameters Switch  | STD/HIGH-SAT  |
| Image Settings           | Brightness, Mirror, Sharpness, Anti-Banding, AGC  |
| Frame Rate               | 5 MP @ 20 fps, 4 MP @ 30 fps, 4 MP @ 25 fps, 1080p @ 30 fps, 1080p @ 25 fps   |
| Day/Night Mode           | Color   |
| Wide Dynamic Range (WDR) | ≥130 dB   |
| Image Enhancement        | WDR, BLC, HLC, Global, HLS  |
| Noise Reduction          | 3D DNR/2D DNR   |
| White Balance            | Auto/Manual   |
| Interface                |   |
| Video Output             | 1 HD analog output  |
| General                  |   |
| Material                 | Metal   |
| Dimension                | 68 mm × 70 mm × 168.2 mm (2.68" × 2.76" × 6.62")  |
| Weight                   | Approx. 398 g (0.88 lb.)  |
| Operating Condition      | -40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensing)  |
| Communication            | HIKVISION-C   |
| Language                 | English   |
| Power                    | 12 VDC±25%/PoC.af, Max. 4 W<br>*You are recommended to use one power adapter for one camera, and use 2-pin power supply for long-distance power supply. |
| Approval                 |   |
| Protection               | IP67  |

## ▪ Available Model

DS-2CE10HFT-E(2.8mm)

DS-2CE10HFT-E(3.6mm)

## ▪ Dimension

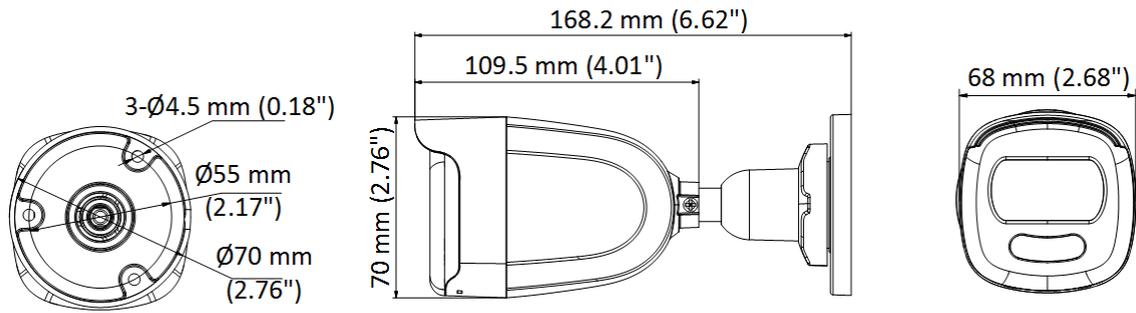

▪ **Accessory**

▪ **Optional**

**DS-1280ZJ-XS**



# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

