

## **DS-K3H4410-120** **Value Full Height Turnstile**



Full height turnstile with high reliability and suitable for outdoor use. The waterproof design of the whole structure and the segmented installation design make the installation and maintenance of this product very convenient.

- LED indicates the passing direction(forbidden or available).
- When the power is cut off, the system will automatically unlock the brake levers into a free-passing mode to facilitate the evacuation of people.
- Valid passing duration settings: System will cancel the passing permission if a person does not pass through the lane within the valid passing duration.
- Support bi-directional passing through.


## ▪ Specification

| System                  |                                                                                                                                   |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| MCBF                    | More than 2 million times                                                                                                         |
| Motor                   | NA                                                                                                                                |
| General                 |                                                                                                                                   |
| Throughput              | More than 30 persons per minute<br>The actual throughput is affected by the person passing rate and passing method.               |
| Lane width              | 600mm                                                                                                                             |
| Pedestal material       | SUS304 stainless steel 1.2mm(0.05")<br>Stainless steel pipe 1.0mm(0.04")                                                          |
| Power supply            | 100 to 240 VAC; 50 to 60 Hz                                                                                                       |
| Working temperature     | -15°C ~55°C ( 5°F ~131°F )                                                                                                        |
| Working humidity        | 10% to 90% (No Condensing)                                                                                                        |
| Dimensions              | Without package: 1400mm x 1200mm x 2230mm(55.1" x 47.3" x 87.8")<br>With package: 2135mm x 1435mm x 1115mm(84.1" x 56.5" x 43.9") |
| Application environment | Indoor and outdoor                                                                                                                |
| Weight                  | Without package: 100 kg (221 lbs)<br>With package: 200 kg (441 lbs)                                                               |
| Rotation angle          | 120°                                                                                                                              |

## ▪ Available Model

DS-K3H4410-120

## ▪ Dimension

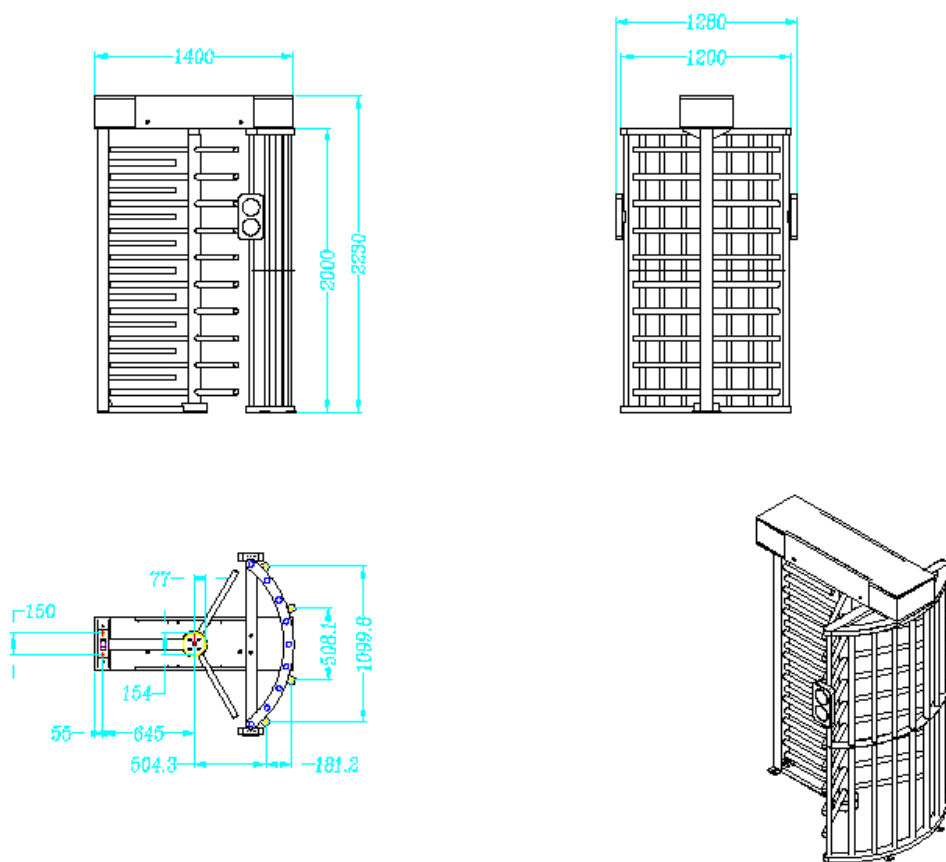

▪ Accessory

▪ Optional

| H44xx-IDB                                                                           | H44xx-ZC                                                                            | H44xx-LB                                                                            | DS-K1T671MF-L                                                                         | DS-K1T671M-L                                                                          |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| DS-K1T671                                                                           | DS-K1T671M                                                                          |                                                                                     |                                                                                       |                                                                                       |
|  |  |                                                                                     |                                                                                       |                                                                                       |

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

