

Face recognition terminal is a kind of access control device. It can be widely applied in multiple scenarios, such as enterprises, stations, dwellings, factories, schools, campus and so on.

- 7-inch LCD touch screen, 2 Mega pixel wide-angle lens
- Recognition distance: 0.3 to 3 m
- Face recognition duration \leq 0.2 s/User
- Face recognition accuracy rate \geq 99%
- Built-in M1 card, Felica card, and DESfire card reading module (Presents card on the screen to authenticate)
- Face mask detection
- 100,000 face capacity, 10,000 fingerprint capacity (With fingerprint module), 500,000 card capacity, and 150,000 event capacity
- Supports ISAPI, ISUP 5.0, TCP/IP (IPv4 and IPv6)
- Supports single person and multiple people (Up to 5 people) recognition
- Supports Push SDK.
- Supports the following SIP servers: ASTERISK, 3CX, ELASTIX, miniSipServer, Brekeke, OpenSIPs, Kamailio.
- Supports face duplicate check, preventing multiple people from using the same face.
- Supports attendance-only function.
- Supports customized Wiegand parameters.

■ Specification

| | |
|--------------------------------|--|
| System | |
| Operation system | Linux |
| Display | |
| Size | 7-inch |
| Type | Touch screen |
| Video | |
| FOV | HFOV= 75.5°; VFOV= 41.5°; DFOV= 87° |
| Pixel | 2 MP |
| Lens | Dual-lens |
| Video standard | PAL (Default)/NTSC |
| Network | |
| Wi-Fi | Support, 2.4 G, 802.11b/g/n |
| Wired network | Support 10/100/1000 Mbps self-adaptive |
| Interface | |
| Alarm input | 2 |
| Alarm output | 1 |
| USB | 1 (For Module) |
| Audio Output Interface | 1 (3.5 mm) |
| Network interface | 1 |
| RS-485 | 1 RS-485. Supports OSDP protocol version V2.1.7, Baud 9600, 19200, 38400 |
| Wiegand | 1 |
| Lock output | 1 |
| Exit button | 1 |
| Door contact input | 1 |
| TAMPER | 1 |
| Capacity | |
| Card capacity | 500,000 |
| Face capacity | 100,000 |
| Event capacity | 150,000 |
| Authentication | |
| Face recognition accuracy rate | ≥ 99% |
| Card type | M1 card, DESfire card, Felica card |
| Card reading distance | 0 to 3 cm |
| Card reading duration | □ 1 s |
| Face recognition duration | □ 0.2 s per person |
| Face recognition distance | 0.3 to 3 m |
| General | |
| Power supply | 12 VDC to 24 VDC/2 A |
| Working temperature | -30 °C to 60 °C (-22 °F to 140 °F) |
| Working humidity | 0 to 90% (no condensing) |
| Protective level | IP65 |
| Dimensions | 110.5 mm × 209.2 mm × 24 mm (4.35" × 8.24" × 0.94") |
| Language | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Brazilian Portuguese, Japanese, Korean, Chinese Traditional, French, Turkish, Kazakh and Uzbek. |
| Weight | Gross Weight □ 1.06 kg (2.34 lb) Net Weight □ 0.57 kg (1.26 lb) |
| Function | |
| Two-way audio | Support |
| Time synchronization | Support |
| Face anti-spoofing | Support |
| Live view | Support |
| Audio prompt | Support |


■ Available Model

DS-K1T673TDWX

DS-K1T673TDWX/JAPAN K.K.

DS-K1T673TDWX/HKT PCCW

■ Dimension

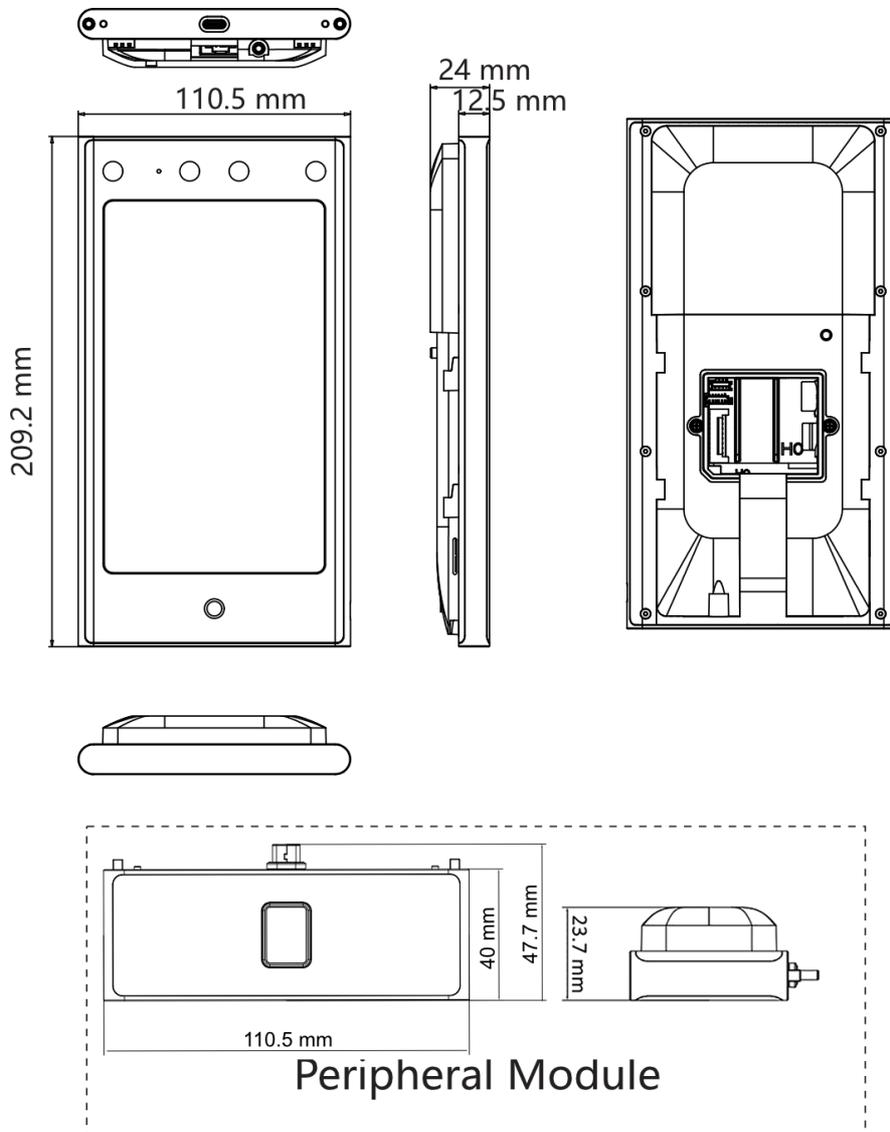

■ Accessory


■ Optional

| DS-KAB673-S1 | DS-KAB6-ZU3 | DS-KAB673-A | DS-KAB673-P | DS-KAB673-EDB |
|--------------|-------------|-------------|-------------|---------------|
| | | | | |
| DS-KAB6-W1 | DS-KAB6-D1 | DS-KAB673-B | DS-KAB6-ZU1 | DS-KAB673-FB |



DS-KAB673-FBQR

DS-KAB673-BQR

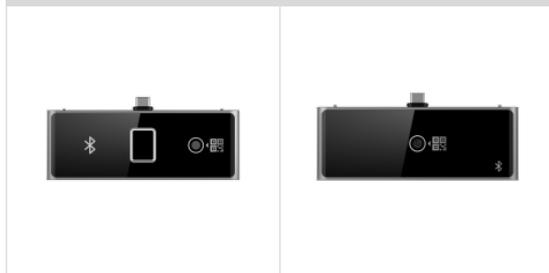



© F
ex

