

DS-2CE5AH0T-VPIT3ZE(C) 5 MP Vandal PoC Motorized Varifocal Dome Camera




- High quality imaging with 5 MP, 2560 × 1944 resolution
- 2.7 mm to 13.5 mm motorized varifocal lens
- Up to 40 m IR distance for bright night imaging
- Water and dust resistant (IP67) and vandal resistant (IK10)

▪ Specification

Camera	
Image Sensor	5 MP CMOS
Signal System	PAL/NTSC
Max. Resolution	2560 (H) × 1944 (V)
Frame Rate	5 M @ 20 fps, 4 M @ 30 fps, 4 M @ 25 fps, 1080p @ 30 fps, 1080p @ 25 fps
Min. Illumination	0.01 Lux @ (F1.6, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Lens Mount	Φ14
Day & Night	IR Cut Filter
Angle Adjustment	Pan: 0° to 355°, Tilt: 0° to 75°, Rotation: 0° to 355°
Lens	
Lens Type	2.7 mm to 13.5 mm motorized varifocal lens
Focal Length & FOV	horizontal FOV: 95° to 26°, vertical FOV: 72° to 20°, diagonal FOV: 126° to 33°
Illuminator	
Supplement Light Range	IR: Up to 40 m
Image	
Day/Night Mode	Auto/Color/BW (Black and White)
Wide Dynamic Range (WDR)	Digital WDR
Image Parameters Switch	STD/HIGH-SAT
White Balance	Auto/Manual
Image Enhancement	DWDR, BLC, HLC, Global
Noise Reduction	2D DNR
Language	English
Image Settings	Brightness, Smart IR, Sharpness, AGC
Interface	
Video Output	1 HD analog output
General	
Power	12 VDC±15%/PoC.at, Max 7.4 W *You are recommended to use one power adapter to supply the power for one camera.
Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F). Humidity 90% or less (non-condensing)
Material	Metal
Communication	HIKVISION-C
Dimension	Ø145 mm × 111.3 mm (5.69" × 4.37")
Weight	Approx. 863 g (1.90 lb.)
Approval	
Protection	IP67

*5 MP Vandal PoC Motorized Varifocal Dome Camera

▪ Dimension

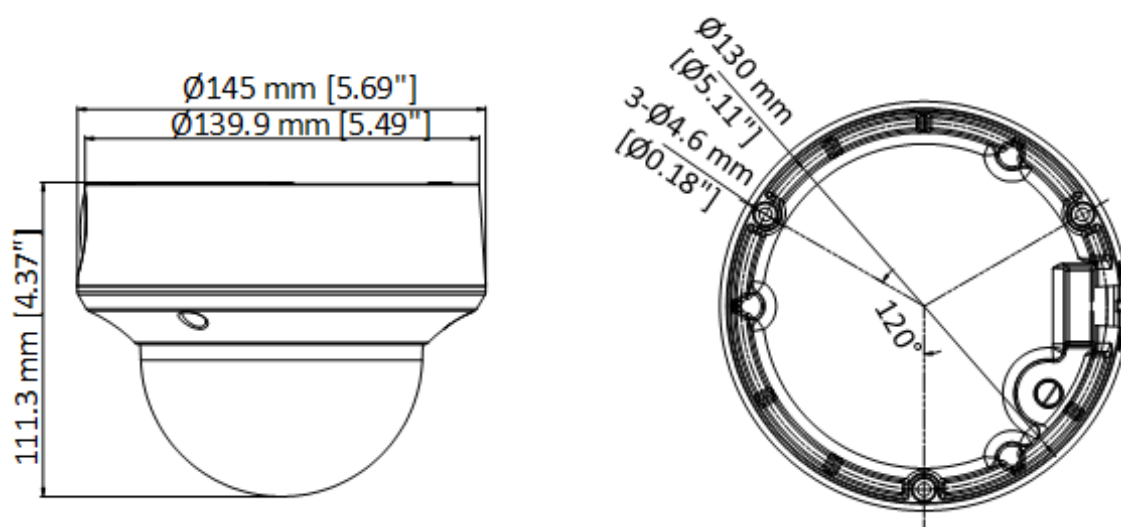

▪ Accessory

▪ Optional

DS-1275ZJ-SUS	DS-1276ZJ-SUS	DS-1280ZJ-DM45	DS-1273ZJ-140-DM 45	DS-1281ZJ-DM45
DS-1271ZJ-140-DM 45				

See Far, Go Further



www.hikvision.com
support@hikvision.com

