

DS-KIS204T Villa Analog Kit



- 4-wire analog video intercom bundle for villa or house
- One call button for easier calls
- Supports captured picture storage
- Including DS-KB2411T-IM and DS-KH2220-S, 5-meter 4-wire cable, and other accessories
- European power supply adaptor included (please mark for other standards when you order)


▪ Specification

Door station	
Resolution	1920 × 1080 Stream resolution: 960 × 576
Lens	1/2.7" CMOS
FOV	Horizontal: 66.2° , Vertical: 37.2°
Door station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Door station	
I/O output	1 relay output
Four-wire	1 four-wire interface (1-ch video input, 1-ch audio input/output, 1-ch power supply, 1-ch grounding)
Door station	
Power supply	12 VDC
Power consumption	Max. 5W
Working temperature	-10° C to + 55° C (14° F to 131° F)
Working humidity	10% to 90%
Dimensions	128 mm × 42 mm × 24.8 mm
Indoor station	
Operation method	Physical button
Type	7-inch colorful TFT LCD
Resolution	800 × 480
Indoor station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Indoor station	
Power supply	12 VDC
Power consumption	≤5 W
Working temperature	-10° C to + 55° C (14° F to 131° F)
Working humidity	10% to 90%
Dimensions (W × H × D)	195.8 mm × 132.8 mm × 18.39 mm (7.7" × 5.2" × 0.7")

▪ Available Model

DS-KIS204T

▪ Dimension

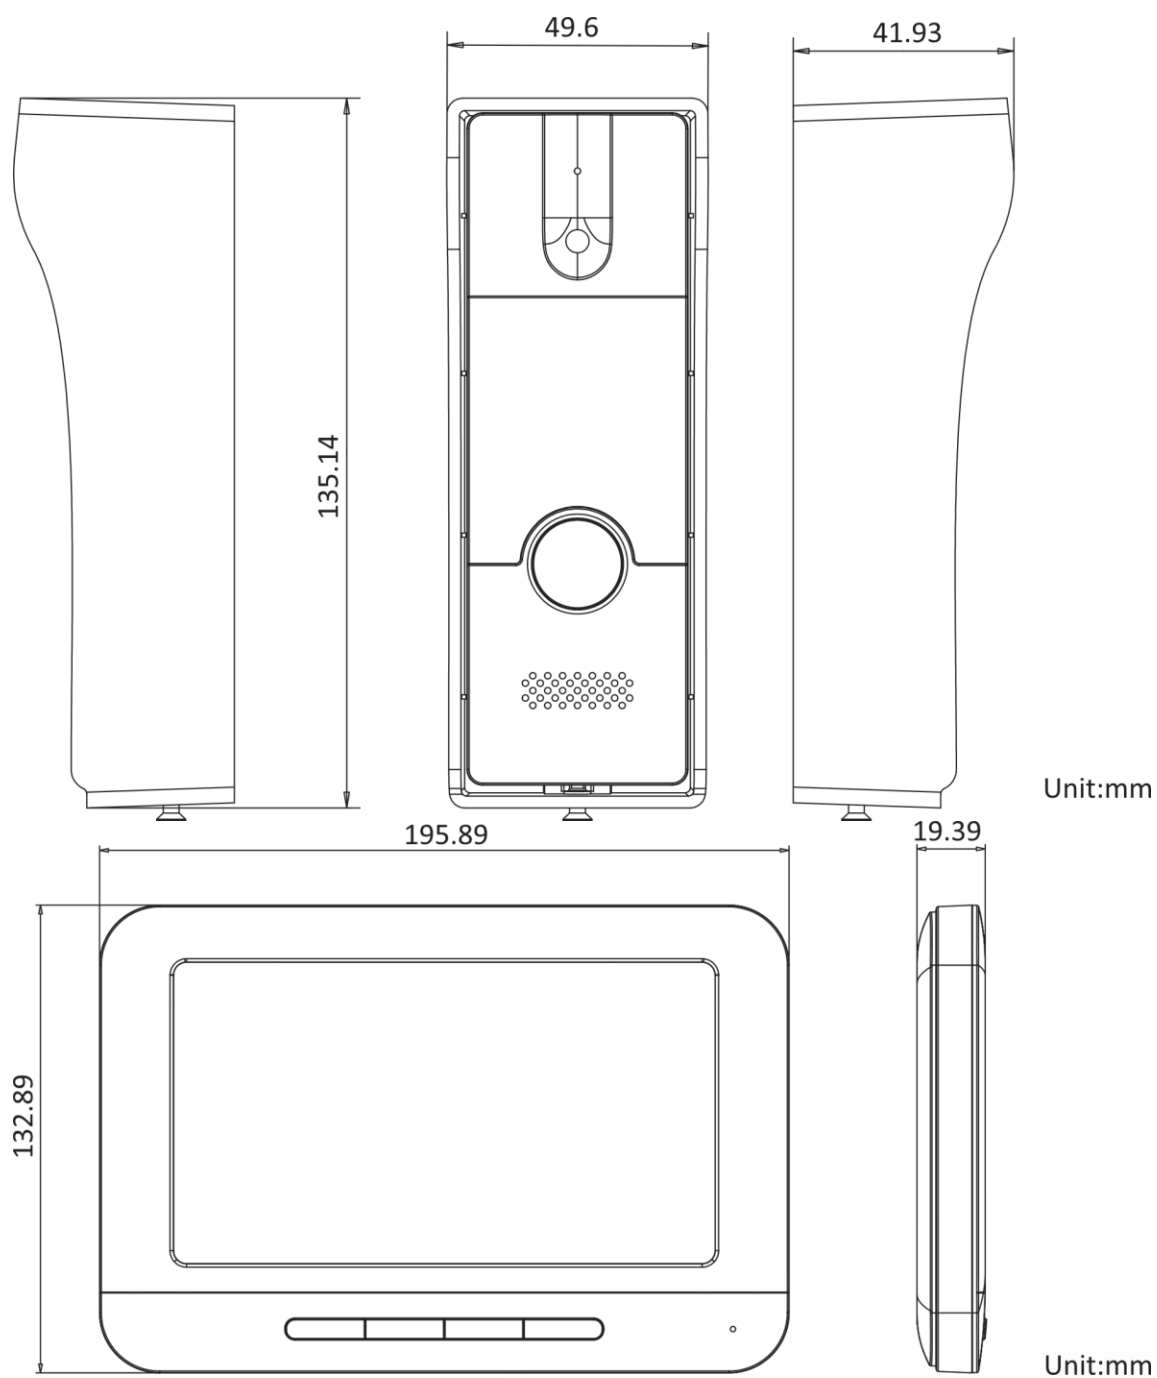

- Accessory
- Optional

DS-KABV24-A



See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®