



1




User Manual

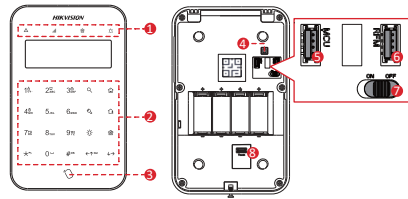


2

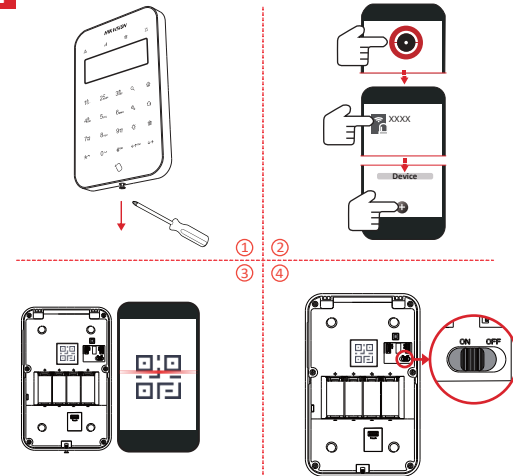


3

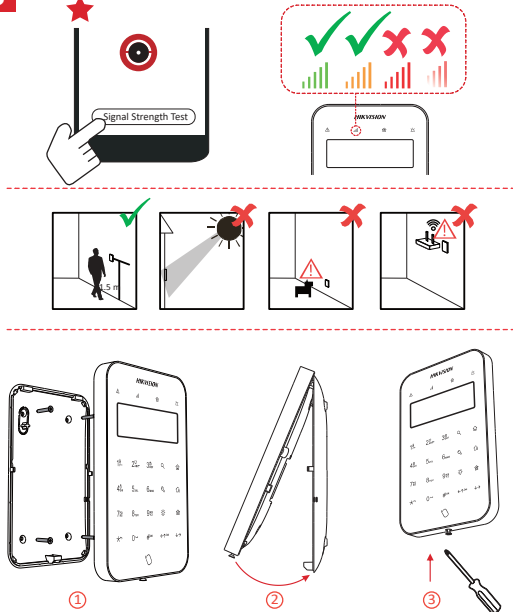


English




Español




Português (Brasil)




Slovenščina




Srpski



עברית



မြန်မာ




English


Diagram Reference

1 Appearance

1. Indicator




2. Numeric and Function Key



3. Swipe Tag Area 4. Tamper Switch 5. MCU Serial Port
6. RFM Serial Port 7. Power Switch 8. Touch Key Serial Port

2 Enrollment

3 Installation



User Manual

Scan the QR code for more information and operation help.

Specification

		Wireless keypad
RF	Wireless technology	21-X, two-way communication
	RF frequency	433 MHz
	RF modulation	2FSK
	RF distance	800 m (open area)
Interface	LED indicator	Fault (orange), enrollment/signal (red/green), arm (blue), disarm (green), alarm (red)
	Buzzer	Supported
	Power switch	Power on/off
	Tamper-proof	Supported, front and rear
	Serial port	3
	Tag reader built-in	Supported
	Numeric key	Number key: 0 to 9 Function key: *, #, query, away arm, stay arm, disarm, output, settings, right, left
LCD Display	System fault display	Supported
	System status display	Supported
	Operation	Supported
	Configuration	Supported
Electrical & Battery	Power consumption	Quiescent current: 80 μ A Max current: 300 mA Voltage: 3 V
	Battery type	Four CR123 batteries
	Battery life span	Standby time more than two years
	Operation temperature	-10°C to 55°C
Other	Operation humidity	10% to 90%
	Color	White
	Installation method	Wall-mounting
	Dimension (WxHxD)	174.63 mm x 109.62 mm x 25.25 mm
	Weight	With batteries: 348 g Without batteries: 282 g