

DS-PDPC12P-EG2-WB(B) **Wireless PIR-Camera Detector**



- Detection range: 12m / 85.9°
- Up to 30KG pet immunity
- SEC (Smart Environmental Control) - Advanced digital signal processing and 3D optics
- Polarizing IR lens design for more uniform night illumination and excellent night shots
- Large integrated memory buffer for image storage
- Fully remote configurable through App
- Multiple enrollment method and easy installation design
- Easy replaceable battery with PCB protected

▪ Specification

Model		DS-PDPC12P-EG2-WB(B)
Detection Performance	Detection Method	Passive Infrared, Video Verification
	Detection Range	12m
	Detection Angle	85.9°
	Detection Zones	52
	Detectable Speed	0.3~2m/s
	Sensitivity	Auto, High, Pet
	Pet Immunity	30Kg
	White Light Filter	6500lux
	Digital Temperature Compensation	Support
	Creep Zone Protection	Support
	Digital Processing	Support
Feature	Sealed Optics	Support
	Tamper Protection	Front, Rear
	Environment Temperature Indicator	Support
	Signal Strength Indicator	Support
	Field Angle	88.4°(H), 68.0°(V)
Video	Image Type	JPEG
	Resolution	640*480, 320*240, 160*120
	Fill Light	Infrared Light
	Fill Range	12m
	Day/Night Switch	Color/Black & White
	Power Switch	Power Up Enrolling
Interface	LED Indicator	Blue(Alarm)
	Transmission Technology	CAM-X Wireless
Transmission	Transmission Method	Two-Way RF Wireless

	Transmission Frequency	433MHz
	Transmission Security	Support
	Transmission Range(Free Space)	800m
	Enrolling Method	Power up,Remote ID,QR Code
Electrical Characteristics	Power Supply	Battery Powered
	Battery Type	CR123A × 3
	Typical Voltage	3V
	Standard Battery Life	Up to 6 years (standby time)
General	Operation Temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Operation Humidity	10% to 90%
	Dimension(W xHxD)	72.2mm × 120.5mm × 56.7mm
	Weight	210g
	Mounting Height	1.8 to 2.4m
	Mounting Method	Wall
	Application Scenario	Indoor
	Bracket	Optional Wall & Ceiling Accessory

▪ Available Model


DS-PDPC12P-EG2-WB(B)

DS-PDPC12P-EG2-WB(B)/Latin/kit

▪ Accessory

▪ Optional

DS-PDB-IN-Ceiling bracket	DS-PDB-IN-Wallbracket	DS-PDP-IN-CR123A
Internal ceiling mounted bracket	Internal wall mounted bracket	Indoor Detector Battery

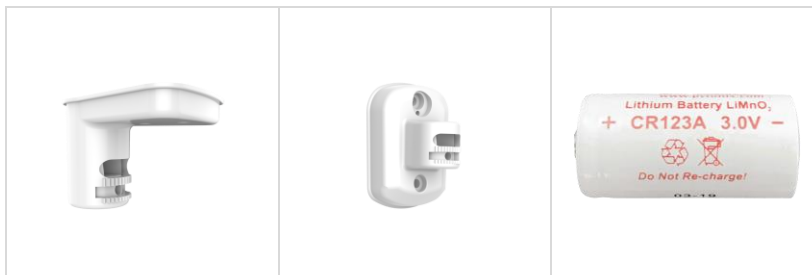

See Far, Go Further



www.hikvision.com
support@hikvision.com

