

DS-2CE19D0T-VFIT3F(C) 2 MP Manual Varifocal Bullet Camera



- High quality imaging with 2 MP, 1920 × 1080 resolution
- 2.7 mm to 13.5 mm varifocal lens
- Up to 40 m IR distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)


▪ Specification

Camera	
Image Sensor	2 MP CMOS
Signal System	PAL/NTSC
Max. Resolution	1920 (H) × 1080 (V)
Frame Rate	TVI: 1920 × 1080 @ 30 fps, 1920 × 1080 @ 25 fps AHD: 1920 × 1080 @ 30 fps, 1080P @ 25 fps CVI: 1920 × 1080 @ 30 fps, 1080P @ 25 fps CVBS: PAL/NTSC
Min. Illumination	0.01 Lux @ (F1.6, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Lens Mount	Φ14
Day & Night	ICR
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 90°, Rotation: 0 to 360°
Lens	
Lens Type	2.7 mm to 13.5 mm varifocal lens
Focal Length & FOV	Horizontal FOV: 100° to 30°, vertical FOV: 52° to 17°, diagonal FOV: 116° to 34.5°
Illuminator	
Supplement Light Range	IR: Up to 40 m
Image	
Day/Night Mode	Auto/Color/BW (Black and White)
Image Parameters Switch	STD/HIGH-SAT
White Balance	Auto/Manual
Image Enhancement	DWDR, BLC, HLC, Global
Noise Reduction	2D DNR
Language	English
Image Settings	Brightness, Smart IR, Sharpness, AGC
Wide Dynamic Range (WDR)	Digital WDR
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
General	
Power	12 VDC ± 25%, Max. 5 W
Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F). Humidity 90% or less (non-condensing)
Material	Front cover: Metal, Main body: Plastic
Communication	HIKVISION-C
Dimension	83.3 mm × 78.2 mm × 256.4 mm (3.2" × 3" × 10")
Weight	Approx. 580 g (1.28 lb.)
Approval	
Protection	IP67

▪ Available Model

DS-2CE19D0T-VFIT3F(2.7-13.5mm)(C)

▪ Dimension

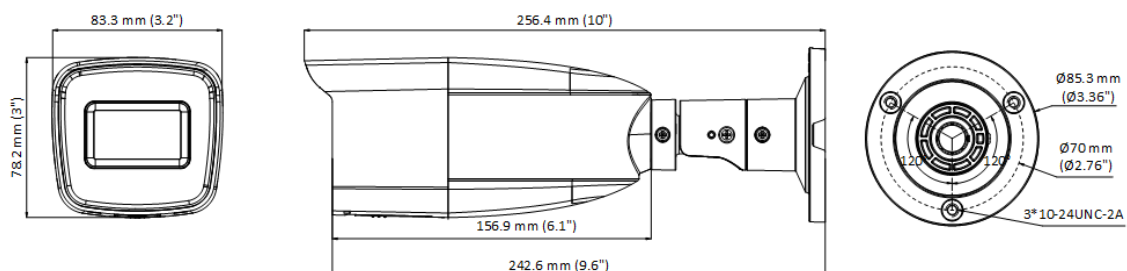

▪ **Accessory**

▪ **Optional**

DS-1280ZJ-S	DS-1276ZJ-SUS	DS-1275ZJ-SUS
		

See Far, Go Further



www.hikvision.com
support@hikvision.com

