

## DS-2CE10DF3T-F#UK 2 MP ColorVu Fixed Mini Bullet Camera



- High quality imaging with 2 MP, 1920 × 1080 resolution
- 24/7 color imaging with F1.0 aperture
- Clear imaging against strong back light due to 130 dB true WDR technology
- 3D DNR technology delivers clean and sharp images
- 2.8 mm, 3.6 mm, 6 mm fixed focal lens
- Up to 20 m white light distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



## ▪ Specification


| Camera                   |                                                                                                                                                                                                            |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Signal System            | PAL/NTSC                                                                                                                                                                                                   |
| Slow Shutter             | Max. 16 times                                                                                                                                                                                              |
| Light Alarm              | Solid Light Alarm (White Light)                                                                                                                                                                            |
| Lens                     |                                                                                                                                                                                                            |
| Lens Type                | 2.8 mm, 3.6 mm, 6 mm fixed focal lens                                                                                                                                                                      |
| Focal Length & FOV       | 2.8 mm, horizontal FOV: 98°, vertical FOV: 52°, diagonal FOV: 116°<br>3.6 mm, horizontal FOV: 77°, vertical FOV: 42°, diagonal FOV: 91°<br>6 mm, horizontal FOV: 51°, vertical FOV: 28°, diagonal FOV: 59° |
| Lens Mount               | M12                                                                                                                                                                                                        |
| Illuminator              |                                                                                                                                                                                                            |
| Supplement Light Type    | White Light                                                                                                                                                                                                |
| Supplement Light Range   | Up to 20 m                                                                                                                                                                                                 |
| Smart Supplement Light   | Yes                                                                                                                                                                                                        |
| Supplement Light Type    | White Light                                                                                                                                                                                                |
| Image                    |                                                                                                                                                                                                            |
| Image Parameters Switch  | STD/HIGH-SAT/HIGHLIGHT                                                                                                                                                                                     |
| Image Settings           | Brightness, Contrast, Mirror, Defective Pixel Correction, Sharpness, Anti-Banding, AGC                                                                                                                     |
| Frame Rate               | TVI: 1080p@25fps/30fps<br>CVI: 1080p@25fps/30fps<br>AHD: 1080p@25fps/30fps<br>CVBS: PAL/NTSC                                                                                                               |
| Day/Night Mode           | Color                                                                                                                                                                                                      |
| Wide Dynamic Range (WDR) | ≥130 dB                                                                                                                                                                                                    |
| Image Enhancement        | WDR, BLC, HLC, Global, HLS                                                                                                                                                                                 |
| Privacy Mask             | 4 programmable privacy masks                                                                                                                                                                               |
| Noise Reduction          | 3D DNR/2D DNR                                                                                                                                                                                              |
| White Balance            | Auto/Manual                                                                                                                                                                                                |
| Interface                |                                                                                                                                                                                                            |
| Video Output             | Switchable TVI/AHD/CVI/CVBS                                                                                                                                                                                |
| Event                    |                                                                                                                                                                                                            |
| Motion Detection         | 4 programmable motion areas                                                                                                                                                                                |
| General                  |                                                                                                                                                                                                            |
| Material                 | Metal                                                                                                                                                                                                      |
| Dimension                | 161.1 mm × 70 mm × 70 mm (6.34" × 2.76" × 2.76")                                                                                                                                                           |
| Weight                   | Approx. 388 g (0.86 lb.)                                                                                                                                                                                   |
| Operating Condition      | -40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensing)                                                                                                                                     |
| Communication            | HIKVISION-C                                                                                                                                                                                                |
| Language                 | English                                                                                                                                                                                                    |

|                 |                                                                                                                   |
|-----------------|-------------------------------------------------------------------------------------------------------------------|
| Power           | 12 VDC $\pm$ 25%, Max. 2.9 W<br>*You are recommended to use one power adapter to supply the power for one camera. |
| <b>Approval</b> |                                                                                                                   |
| Protection      | IP67                                                                                                              |

## ▪ Available Model

DS-2CE10DF3T-F(2.8mm)(UK LIMITED),DS-2CE10DF3T-F(3.6mm)(UK LIMITED),

## ▪ Dimension

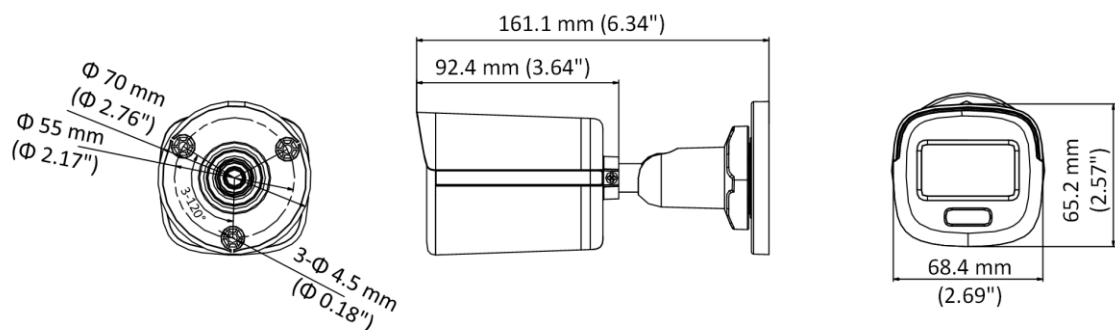


## ▪ Accessory

### ▪ Optional

**DS-1280ZJ-XS**

**Junction box**





Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com