

DS-K3DW210X/pull Door Operator



The DS-K3DW210X/pull series door operator with slide rail is designed to automatically open and close door. It supports indoor installation and is applicable to opening door inward, with adjustable door opening/closing angle and speed.

- Slide rail type transmission structure
- Supports external device connection for automatic and safer door opening and closing
- Supports multiple door types for various scenarios
- Supports dual-motor communication

**Installation requirements: 670 mm to 1200 mm door width, Max. 120 kg door weight, Max. 12 mm height difference between wall and door upper edge. The door operator is applicable to wooden doors and icon doors that can be screwed. Door weight should be evenly distributed.*


▪ Specification

Interface	
Lock control	Support
Door contact input	Support
General	
Power consumption	90 W
Working temperature	-20 °C to 60°C (-4 °F to 140 °F)
Working humidity	0% to 90%
Dimensions	Device main body: 552 mm (21.73") × 80 mm (3.15") × 60 mm (2.36")
Weight	Device main body: 3.5 kg (7.7 lbs)
Application environment	Indoor
Power supply method	100 VAC to 240 VAC
Buzzer	1

▪ Available Model

DS-K3DW210X/pull

▪ Dimension

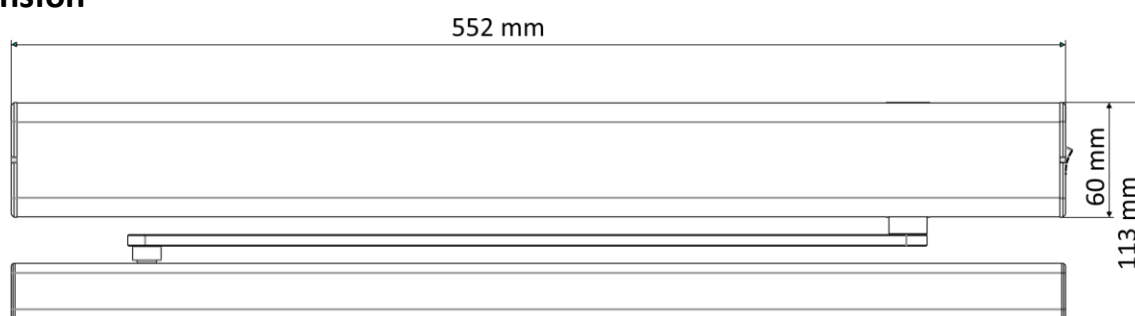

See Far, Go Further



www.hikvision.com
support@hikvision.com

