

DS-2FA1205-C8(MEX) Switching Mode Power Supply



- 60 W, 12 VDC/1 A max per channel, max total current is 5 A
- Over current/short circuit/over voltage protection
- Good EMC performance
- Compact size; applicable to cameras


▪ Specification

Parameters	
Appearance	White
Dimension	144 mm × 109.5 mm × 33 mm (5.67" × 4.31" × 1.30")
Operating Conditions	0°C to 40°C (32°F to 104°F), Humidity: 10% to 95% (non-condensing)
LED Indicator	Green
Output	12 VDC/1 A per channel
Ripple & Noise 150 mVp-p	0.15 Vp-p (150 mV)
AC Input Connector	C8
DC Output Connector	DC Plug: grid terminal
Storage Conditions	-40°C to 80°C (-40°F to 176°F), Humidity: 5% to 95% (non-condensing)
Cable Length Compensation	Normal: 12 VDC Long: 13.5 VDC Ex-Long: 15 VDC

▪ Available Model

DS-2FA1205-C8(MEX)

▪ Dimension

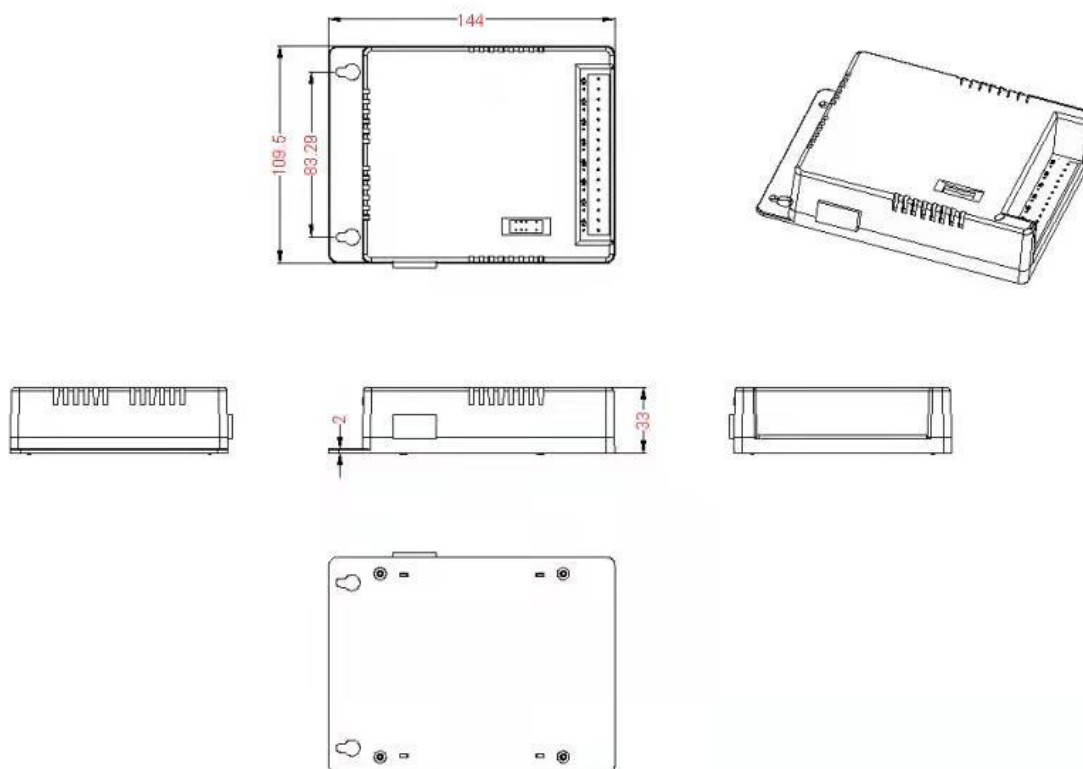

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq