


DVR-E04Q-B

4-ch 1080p 1U H.265 eSSD DVR

Key Feature

- Powered by eSSD technology
- Deep learning based human and vehicle targets classification of Motion Detection 2.0
- Scene-adaptive bitrate control video compression
- Up to 3K Lite@12 fps encoding capability
- Low power consumption
- Audio via coaxial cable



Built-In SSD

- Minimalist eSSD design brings low power consumption
- Integrated storage design provides the plug-and-play device use

Easy Installation

- Mini size design saves installation space
- Anti-vibration design and light weight satisfy more installation conditions

Compression and Recording

- Scene-adaptive bitrate control technology would precisely allocate videos in eSSD according to the actual scene
- Full channel recording at up to 3K/5 MP Lite resolution

Smart Function

- Deep learning-based motion detection 2.0
- Smart search for efficient playback

▪ Specification


Motion Detection 2.0	
Human/Vehicle Analysis	Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms caused by objects like leaves and lights; Quick search by object or event type is supported;
Recording	
Video Compression	H.265 Pro/H.265
Encoding Resolution	When 1080p Lite mode is not enabled: 3K Lite/5 MP Lite/4 MP lite/1080p/720p/VGA/WD1/4CIF/CIF; When 1080p Lite mode is enabled: 3K Lite/5 MP Lite/4 MP Lite/1080p Lite/720p Lite/VGA/WD1/4CIF/CIF
Frame Rate	Main stream: When 1080p Lite mode not enabled: For 3K stream access: 3K Lite@12 fps; 4 MP Lite/1080p@15 fps; 720p/WD1/4CIF/VGA/CIF@20 fps For 5 MP stream access: 5 MP Lite@12fps; 4 MP Lite/1080p@15 fps; 720p/WD1/4CIF/VGA/CIF@20 fps For 4 MP stream access: 4 MP Lite/1080p@15 fps; 720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) For 1080p stream access: 1080p/720p@15 fps; VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 3K Lite/5 MP Lite@12fps; 4 MP Lite@15 fps; 1080p Lite/720p Lite/VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF@12 fps; CIF@25 fps (P)/30 fps (N)
Video Bitrate	According to the actual scene, scene-adaptive bitrate control technology would automatically allocates appropriate bitrate to ensure the stability of recording period.
Stream Type	Video, Video & Audio Note: In order to protect privacy, the device will only record video (without audio) by default. If you want to record audio, you shall manually enable audio recording. For operation details, refer to the user manual.
Audio Compression	G.711u
Audio Bitrate	64 Kbps

Video and Audio	
IP Video Input	1-ch Up to 6 MP resolution Support H.265+/H.265 IP cameras
Analog Video Input	4-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
HDTVl Input	5 MP@20 fps, 3K@20 fps, 4 MP@30 fps, 4 MP@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@60 fps, 720p@50 fps, 720p@30 fps, 720p@25 fps
AHD Input	4 MP@30 fps, 4 MP@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps
HDCVI Input	4 MP@30 fps, 4 MP@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps
CVBS Input	Support
HDMI Output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz
VGA Output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz
Video Output Mode	HDMI/VGA simultaneous output
Audio Input	4-ch via coaxial cable
Audio Output	1-ch via HDMI
Synchronous playback	4-ch
Network	
Total Bandwidth	72 Mbps Incoming bandwidth: 4 Mbps
Network Protocol	TCP/IP, DHCP, HiLookVision, DNS, DDNS, NTP, SADP, SMTP, NFS, UPnP™, HTTPS
Remote Connection	32
Network Interface	1, RJ45 10/100 Mbps self-adaptive Ethernet interface
Auxiliary Interface	
Capacity	Built-in 512 GB eSSD (480 GB available) Note: The device can store about 2 weeks videos for 4-ch analog cameras (default parameters), this estimation is for reference only
USB Interface	Rear panel: 2 × USB 2.0
Alarm In/Out	N/A
General	
Power Supply	12 VDC, 1 A
Consumption	≤ 5.4 W (with eSSD)
Working Temperature	-10 °C to 45 °C (14 °F to 113 °F)
Working Humidity	10% to 90%
Dimension (W × D × H)	151 × 121 × 46 mm (5.94 × 4.76 × 1.81 inch)
Weight	≤ 0.5 kg (with eSSD, 1.1 lb.)

Note:

Analog and IP signal input types are not configurable, and analog channel cannot be disabled to increase the maximum accessible number of network cameras.

Physical Interface

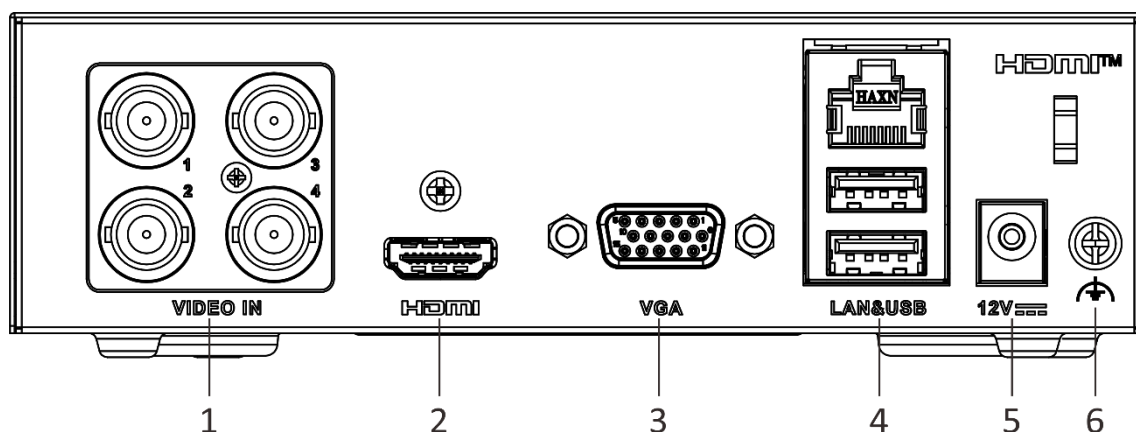

No.	Description	No.	Description
1	Video and coaxial audio in	4	LAN network interface and USB interface
2	HDMI interface	5	Power supply
3	VGA interface	6	GND

Available Model

DVR-E04Q-B