

DS-9600
128-ch



- Up to 128-ch IP camera inputs
- Up to 2-ch@32 MP/2-ch@24 MP/4-ch@12 MP/8-ch@8 MP/16-ch@4 MP/32-ch@1080p decoding capacity
- Up to 400 Mbps incoming bandwidth and 400 Mbps outgoing bandwidth
- 2 HDMI (different source) and 2 VGA (different source) interfaces, 8K or dual 4K video outputs
- Supports special cameras, including people counting camera, ANPR (automatic number plate recognition) camera, and fisheye camera
- Advanced streaming technology enables smooth live view in poor network conditions
- Supports RAID 0, 1, 5, 6, 10 and N+M hot spare for even more reliable data storage, effectively avoids data loss risks
- Up to 8-ch IP speakers can be connected

■ Function

Professional and Reliability

- ② H.265+ compression effectively reduces the storage space by up to 75%
- ② Dual-stream recording saves bandwidth
- ② Adopt stream over TLS encryption technology which provides more secure stream transmission service
- ② Support double verification for playback and downloading

HD Video Output

- ② Provide independent HDMI and VGA outputs
- ② HDMI video output at up to 8K or dual 4K resolution

Storage and Playback

- ② 16 SATA interfaces for HDD connection (up to 16 TB capacity per HDD)
- ② 1 eSATA interface for HDD connection
- ② 16-ch synchronous playback

Smart & POS Function

- ② Support multiple VCA (Video Content Analytics) events
- ② Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, and people counting
- ② POS information overlay on live view and playback, and POS triggered recording and alarm

Network & Ethernet Access

- ② 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- ② Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- ② Smooth streaming technology
- ② Support web access without plug-in

■ Specification

Video and Audio	
IP Video Input	128-ch
Incoming Bandwidth	400 Mbps
Outgoing Bandwidth	400 Mbps
HDMI 1 Output	8K (7680 × 4320)/30Hz, 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
HDMI 2 Output	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz *: When HDMI 1 output resolution is 8K, the maximum HDMI 2 output resolution is 1080p.
VGA 1 Output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA 2 Output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Video Output Mode	HDMI 1 and VGA 1 provide simultaneous video output, and work as the main output; HDMI 2 and VGA 2 provide simultaneous video output, and work as the auxiliary output
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio Input	1-ch, RCA (2.0 Vp-p, 1 KΩ)
Audio Output	2-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)
Decoding	
Decoding Format	H.265+/H.265/H.264+/H.264
Recording Resolution	32 MP/24 MP/12 MP/8 MP/7 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous playback	16-ch
Decoding Capability	2-ch@32 MP (30 fps)/2-ch@24 MP (30fps)/4-ch@16 MP (30fps)/8-ch@8 MP (30fps)/16-ch@4 MP (30fps)/32-ch@2 MP (30fps)
Audio Compression	G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM
Network	
Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS, ONVIF(Version 2.2), OTAP
Network Interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Camera Access Protocol	ONVIF(Version 2.5), RTSP
RAID	
RAID Type	RAID0, RAID1, RAID5, RAID6, RAID10
Auxiliary Interface	
Serial Interface	1 RS-485 (full-duplex), 1 RS-232
SATA	16 SATA interfaces supporting hot-plug
eSATA	1 eSATA interface
Capacity	Up to 16 TB capacity for each disk
Alarm In/Out	16/9
USB Interface	Front panel: 2 × USB 2.0; Rear panel: 2 × USB 3.0
Ctrl 12V	Controllable 12 VDC, 1 A power output for external alarm device; The power will be turned on when the alarm output is triggered. *: The Ctrl 12V power is controlled by alarm output 9.
DC 12V	12 VDC, 1 A power output
General	
Power Supply	100 to 240 VAC, 50 to 60 Hz
Consumption	≤ 50 W (without HDD)
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10% to 90%
Chassis	3U chassis

◐

◐



◐

			e
			U
			S
			B
			3
			.
			0
2	L A N	8	i
	i		n
	t		t
	e		e
	r		r
	f		f
	a		a
	c		c
	e		e
	s		s
3	A	9	A
	u		l
	d		a
	i		r
	o		m
	i		i
	n		n
	,		,
	a		a
	n		l
	d		a
	o		r
	u		m
	t		o
			u
			t
			,
			R
			S
			-
			4
			8
			5
			s
			e
			r

			i a l i n t e r f a c e , C t r l 1 2 V
			a n d D C 1 2 V
4	A u d i o o u t a n d v i d e	1 0	G N D

		o		
		o		
		u		
		t		
		H		1
		D		0
		M		0
		I		
		1		t
				o
		a		
		n		2
		d		4
				0
		H		
		D		V
		M	1	A
		I	1	C
		2		
				p
		i		o
		n		w
		t		e
		e		r
		r		s
		f		u
		a		p
		c		p
		e		l
		s		y
5		V	1	P
		G	2	o
		A		w
				e
		1		r
				S
		a		w
		n		i
		d		t
				c
		V		h
		G		
		A		
		2		
		i		
6				

■ Available Model


DS-96128NI-M16(STD)

DS-96128NI-M16(NEU)

DS-96128NI-M16(USA-STD)/USA Nodac

DS-96128NI-M16(STD)/ISS

■ Dimension

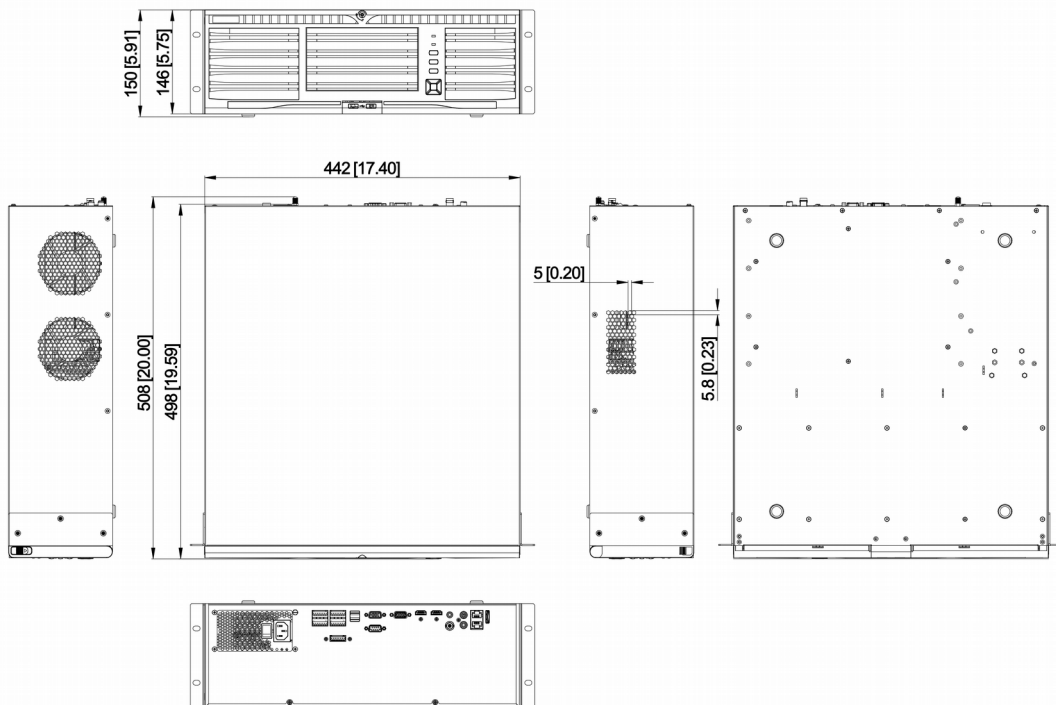

Unit:mm [inch]

SCALE	1:1
-------	-----

