

DS-KH6320Y-WTPE2 Two-wire indoor station



- 7" touch screen 2-Wire IP indoor station with 1024 × 600 resolution
- Convenient Hik-Connect APP Mobile Control: receive calls, open the door and live view remotely
- Easy wizard for quick set up
- Live-view of the door station and cameras in public areas
- Support voice messages when no response from the indoor station

▪ Specification

System parameters	
Operating system	Embedded Linux operation system
ROM	32 MB
RAM	128 MB
CPU	Embedded processor
Display parameters	
Screen size	7-inch
Operation method	Capacitive touch screen
Type	Colorful TFT screen
Resolution	1024 × 600
Video parameters	
Lens	/
FOV	/
WDR	/
Resolution	/
Focal length	/
Audio parameters	
Audio compression standard	G.711 U G.711 A
Audio input	1* Built-in omnidirectional microphone
Audio output	1* Built-in loudspeaker, 8Ω
Audio compression bitrate	64 Kps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Event capacity	2 MB RAM (without TF card) for events
Linked network camera capacity	16
Linked indoor extensions capacity	0
Notice capacity	200
Linked doorphone capacity	/
Network parameters	
Communication protocol	TCP/IP, SIP2.0, RTSP
Wired network	1* 10 Mbps through 2-wire interface
Wi-Fi standard	Wi-Fi 802.11 b/g/n, 2.400-2.4835 GHz
Bluetooth version	/
3G/4G standard	/
Zigbee	/
Device interfaces	
Alarm input	8-ch alarm inputs
TAMPER	/
RS-485	1
USB	/
TF card	Max to 32 GB (Reserved)
Alarm output	0



No. 333 Qianming Road, Binjiang District,
Hangzhou 310051, China
Tel: 86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.

Hikvision

HikvisionHQ

HikvisionHQ

Hikvision_Global

Hikvision Corporate Channel

hikvisionhq

Two-wire IP interface	1
General	
Button	0
Installation	Surface mounting
Indicator	0
Weight	327 g
Protective level	/
Power supply method	Two-wire interface
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90% (no-condensing)
Dimensions	200 mm × 140 mm × 23.6 mm (7.87" × 5.51" × 0.93")
Battery	/
Power supply	24 VDC, 1.5 A
Application environment	Indoor
Power consumption	≤ 8 W
Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Portuguese, Slovak

▪ Available Model

DS-KH6320Y-WTPE2

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global




Hikvision
Corporate Channel



hikvisionhq

▪ Dimension

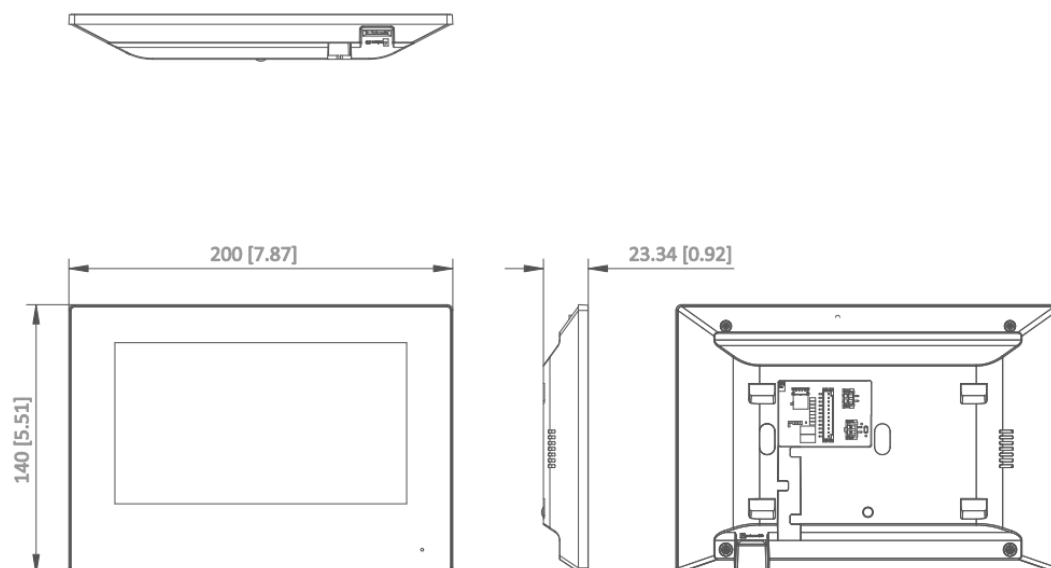

Unit:mm [inch]

SCALE	1:1
-------	-----

▪ Accessory

▪ Included

DS-KABH6320-T Indoor Station Table Bracket



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

