

DS-K3B530X Pro Swing Barriers



The DS-K3B530X series swing barrier with 14 pairs of IR lights is designed to detect unauthorized entrance or exit. By adopting the swing barrier integratedly with the access control system, person should authenticate to pass through the lane via presenting IC or ID card, scanning QR code, etc. It is widely used in office building, hotels, residences, etc.

- 14 pairs of IR light detectors: Permissions validation and anti-tailgating.
- LED light indicates passing direction.
- Valid passing duration settings: System will cancel the passing permission if a person does not pass through the lane within the valid passing duration.
- Support speaker and remote control keyfob optional, need to order separately.

▪ Specification

System	
Motor	Servo motor
MCBF	≥ 12 million times
Network	
Communication protocol	ISAPI
Wired network	10/100 Mbps self-adaptive Ethernet
Wi-Fi	For AP mode only
Interface	
Network interface	1
Lock control	2
Exit button	2
Alarm output	2
RS-485	4
RS-232	4
Wiegand	NA
Fire alarm input	1
Case input	2
Hardware	
Access controller	Supplied
Supercapacitor	Supplied
Network switch	Not supplied
Power supply for face recognition module	Supported
Keyfob	Optional
Card receiver	Optional
Capacity	
Card capacity	700,000
Event capacity	700,000
Authentication	
Card type	EM card or M1 card or Desfire card (actual corresponding card type refer to product model names).
Function	
Configuration via Web browser	Supported
Configuration via mobile Web browser	Supported
Audio prompt	Supported
AP mode	Supported
General	
Throughput	30 to 60 persons per minute The actual throughput is affected by the person passing rate and passing method.
IR light detectors	14 pairs
Lane width	For acrylic or stainless pipe: 550 mm to 1100 mm (21.65" to 43.31") For full-height door wings: Max 900mm (35.43") (Height 1.2 m, 1.4 m, 1.6 m, 1.8 m)
Barrier material	Acrylic, Stainless steel pipe, Tempered glass
Pedestal material	SUS304 stainless steel 1.5mm(0.06")

Indicator	Yes
Power	100 to 240 VAC; 50 to 60 Hz
Power consumption	55W per lane
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Working humidity	0% to 95% (No Condensing)
Protective level	IP34
Dimensions	With packaging: 1610 mm (63.39") × 410 mm (16.14") × 1255 mm (49.41"); Without packaging: 1500 mm (59.06") × 130 mm (5.12") × 1000 mm (39.37");
Weight	(Net) Left: 62.78 kg (138.4 lbs); Middle: 83.580 kg (184.26 lbs); Right: 67.010 kg (142.73 lbs); (Rough) Left: 101.18 kg (223.06 lbs); Middle: 120.690 kg (266.08 lbs); Right: 104.120 kg (229.55 lbs);
Approval	CE/CE-LVD/CB/RoHS/REACH/WEEE
Configuration	
Lane width	650;750;900;1100
Pedestal length	1500 mm
Module selection	YES
Pedestal width	130 mm
Wall distance	20 mm
Base	YES
Barrier material	Acrylic glass
Application environment	Indoor and outdoor
Authentication mode	Card,Face,QR code
Card type	EM,M1
Recommended width	650 mm
Base model	DS-KSM01/B530
Product type	Swing barrier
Remote controller type	433Mhz,868Mhz
Movement Protrusion Width	72 mm
Door wing gap	Default:50mm
Convert Face	NO
Door Height	Default(0.85m);1.6m

▪ Note

The main element of the turnstile is stainless steel, which is rust less (antioxidant) and corrosion resistant (The anti-corrosion ability in the medium of acid, alkali, and salt). In order to keep the stainless steel from being oxidized or corroded, you should clean and care the turnstile surface periodically.

The instructions and tips for maintaining the turnstile are as follows:

1. Select different stainless steel types according to the variety of the environments. You can select 304 stainless steel for common circumstances and 316 stainless steel for the scenarios of seaside and chemical plants.
2. Keep the device surface clean and dry.
3. Use non-woven cloth and ethyl alcohol to clean the dirt on the device surface.
4. Use sourcing pad (do not use mesh cleaning ball) to clean the rust on the device surface by following the wire drawing on the stainless steel. And then use non-woven cloth and stainless steel cleaner to wipe the device surface.
5. Clean and maintain the device by using non-woven cloth and stainless steel cleaner periodically. It is suggested to clean the device every month in common circumstances and every week for severe environments (seaside and chemical plants).

for instance).

▪ Available Model


DS-K3B530X-L/M
 DS-K3B530X-L/MPg-Dp65
 DS-K3B530X-M/M
 DS-K3B530X-M/MPg-Dp65
 DS-K3B530X-R/M
 DS-K3B530X-R/MPg-Dp65
 DS-K3B530X-L/Pg-Dp65
 DS-K3B530X-M/MPg-Dm110
 DS-K3B530X-R/MPg-Dm110
 DS-K3B530X-L/MPg/PERU SAC/316L
 DS-K3B530X-R/MPg-Dp90/COLOMBIA
 DS-K3B530X-L/MPg-Dp90/DZ/H15
 DS-K3B530X-M/M-Dp65-90
 DS-K3B530X-M/MPg/PERU SAC/316L
 DS-K3B530X-R/M-Dp90
 DS-K3B530X-R/MPg/PERU SAC/316L
 DS-K3B530X-L/MPg-Dp90
 DS-K3B530X-L/MPg-Dg60H12
 DS-K3B530X-L/M-Dp65
 DS-K3B530X-M/Pg-Dp65
 DS-K3B530X-M/MPg-Dg60H12
 DS-K3B530X-M/MPg-Dp90
 DS-K3B530X-M/Pg-Dp65-90
 DS-K3B530X-R/MPg-Dg60H12
 DS-K3B530X-M/MPg-Dp65-90
 DS-K3B530X-L/EPg
 DS-K3B530X-M/MPg-Dp90-65
 DS-K3B530X-M/EPg
 DS-K3B530X-M/M-Dp65
 DS-K3B530X-R/EPg
 DS-K3B530X-R/Pg-Dp65
 DS-K3B530X-R/MPg-Dp90
 DS-K3B530X-L/EPgQ-Dg55H12
 DS-K3B530X-R/M-Dp65
 DS-K3B530X-L/MPg-Dp65/Black
 DS-K3B530X-L/EPgH
 DS-K3B530X-M/MPg-Dp90/LA
 DS-K3B530X-L/MPg-Dp90/Black
 DS-K3B530X-M/EPgQ-Dg55H12
 DS-K3B530X-M/EPgH
 DS-K3B530X-M/MPg-Dp65/Black
 DS-K3B530X-M/MPg-Dp90/Black
 DS-K3B530X-L/MPg-Dp75/Black
 DS-K3B530X-R/EPgH

DS-K3B530X-R/EPgQ-Dg55H12
DS-K3B530X-R/MPg-Dp90/DZ/H15
DS-K3B530X-M/MPg-Dp65-90/Black
DS-K6B530TMX-M/Dp90
DS-K3B530X-R/MPg-Dp75/Black
DS-K3B530X-M/MPg-Dp90-65/Black
DS-K3B530X-R/MPg-Dp65/Black
DS-K3B530X-L/MQ
DS-K6B530TMX-R/Dp90
DS-K3B530X-R/MPg-Dp90/Black
DS-K3B530X-L/Dg65H18
DS-K3B530X-R/MQ
DS-K3B530X-L/MPg-Dg75H12
DS-K3B530X-L/MPg-Dp110/Black
DS-K3B530X-M/InMPg-Dg65-90H18
DS-K3B530X-M/MPg-Dg75-65H12
DS-K3B530X-L/M-Dp140/DZ
DS-K3B530X-M/MPg-Dg65H12
DS-K3B530X-M/ED
DS-K3B530X-R/M-Dp140/DZ
DS-K3B530X-R/MPg-Dg65H12
DS-K3B530X-R/MPg-Dg90H18
DS-K3B530X-M/ED-868
DS-K3B530X-L/MPg/Black/DZ
DS-K3B530X-L/Dg90H12
DS-K3B530X-M/MPg/868/Black/DZ
DS-K3B530X-L/MPg
DS-K3B530X-M/MPg/868
DS-K3B530X-L/MPgQ-Dp110
DS-K3B530X-R/Dg90H12
DS-K3B530X-R/MPg/868/Black/DZ
DS-K3B530X-M/MPg
DS-K3B530X-R/MPg/868
DS-K3B530X-R/MPg
DS-K3B530X-R/MPgQ-Dp110
DS-K3B530X-R/Modular
DS-K3B530X-L/Pa/Modular
DS-K3B530X-R/MPg-Dp110/Black
DS-K3B530X-M/Modular
DS-K3B530X-L/MPg-Dg65
DS-K3B530X-L/MPgQ
DS-K3B530X-L/MPg-Dp110
DS-K3B530X-L/PgQ/ITTI SAECA
DS-K3B530X-M/MPgQ
DS-K3B530X-L/MQ-Dp75
DS-K3B530X-M/InMPg-Dg110-65
DS-K3B530X-M/MPg-Dp110

DS-K3B530X-M/PgQ/ITTI SAECA
DS-K3B530X-R/MPgQ
DS-K3B530X-M/OutMPg-Dg65
DS-K3B530X-L/PgQ
DS-K3B530X-M/MQ-Dp75
DS-K3B530X-R/PgQ/ITTI SAECA
DS-K3B530X-L/Modular
DS-K3B530X-R/Pa/Modular
DS-K3B530X-M/Pa/Modular
DS-K3B530X-R/MPg-Dp110
DS-K3B530X-M/PgQ
DS-K3B530X-L/DQ
DS-K3B530X-R/Dg65
DS-K3B530X-L/MPg-Dp90/COLOMBIA
DS-K3B530X-R/MQ-Dp75
DS-K3B530X-M/DQ
DS-K3B530X-R/PgQ
DS-K3B530X-R/DQ
DS-K3B530X-M/MQ
DS-K3B530X-M/InMPg-Dg65
DS-K3B530X-L/MPgQ-Dp55
DS-K3B530X-L/MPgQ/Hoa Pha/316
DS-K3B530X-L/Pg
DS-K3B530X-M/Pg
DS-K3B530X-M/MPgQ/Hoa Phat/316
DS-K3B530X-L/Dg110
DS-K3B530X-M/MPgQ-Dp55
DS-K3B530X-R/Pg
DS-K3B530X-R/MPgQ/Hoa Phat/316
DS-K3B530X-L/Q
DS-K3B530X-L/M/SMDC
DS-K3B530X-R/MPg-Dg65
DS-K3B530X-R/MPgQ-Dp55
DS-K3B530X-M/Q
DS-K3B530X-M/M/SMDC
DS-K3B530X-R/Q
DS-K3B530X-L
DS-K3B530X-L/MPgQ-Dp65
DS-K3B530X-L/E
DS-K3B530X-R/M/SMDC
DS-K3B530X-R/E
DS-K3B530X-M
DS-K3B530X-M/Dp65/868
DS-K3B530X-M/E
DS-K3B530X-M/D
DS-K3B530X-M/M/868
DS-K3B530X-R


DS-K3B530X-L/MQ-Dp90
 DS-K3B530X-R/M/868
 DS-K3B530X-M/MQ-Dp90/868
 DS-K3B530X-R/MPgQ-Dp65/868
 DS-K3B530X-L/MPg-Dm110
 DS-K3B530X-M/MPg-Dg65
 DS-K3B530X-R/MQ-Dp90/868
 DS-K3B530X-L/D
 DS-K3B530X-R/D
 DS-K3B530X-M/MPg-Dg65-90
 DS-K3B530X-M/MPg-Dp65-110
 DS-K3B530X-L/MPgQ-Dp110/TEO
 DS-K3B530X-R/MPg-Dg90
 DS-K3B530X-R/MPgQ-Dp110/TEO
 DS-KEB30-AC/K3B530X
 DS-K3B530X-L/MPg-Dg65H18
 DS-K3B530X-M/MPg-Dg65H18
 DS-K3B530X-R/MPg-Dg65H18


▪ Dimension

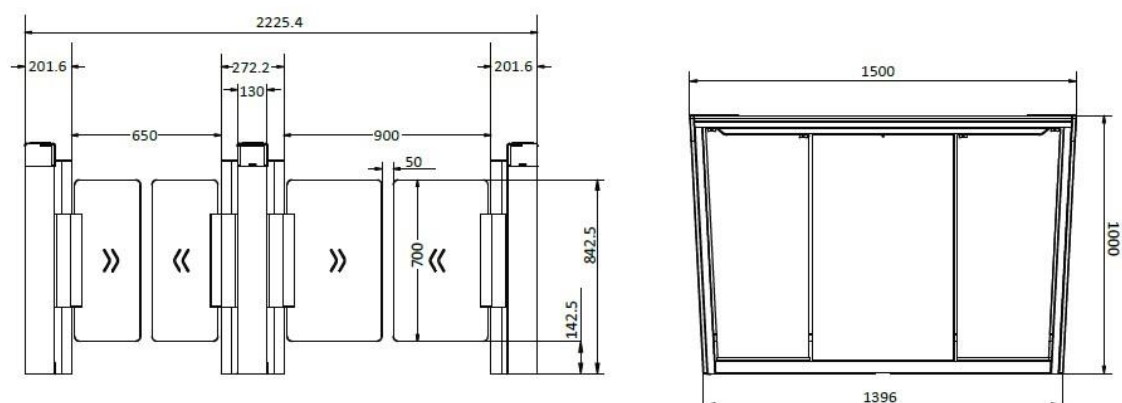

▪ Accessory

▪ Optional

DS-KEB01-RK/Mod ular	DS-KER02X	DS-KER01X	DS-KSD55-M	DS-K7R83X
				
DS-KSD55-P	DS-K7B01	DS-K7R01-868	DS-K7R01-433	DS-KSM01/B530

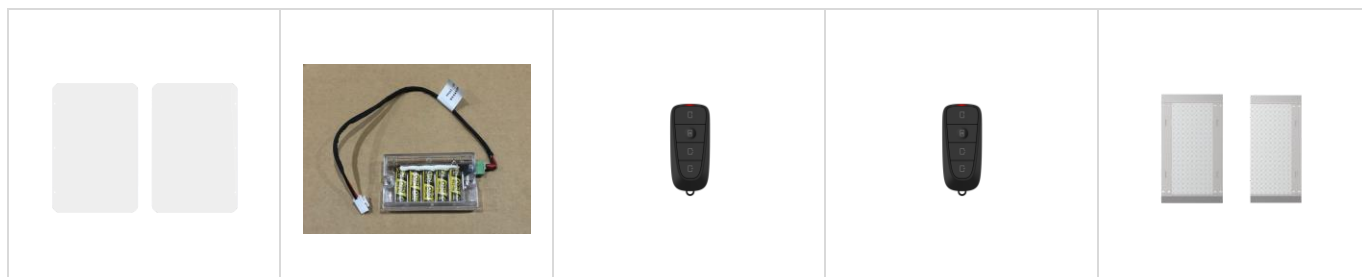

See Far, Go Further



www.hikvision.com
support@hikvision.com

