

## DS-TMT202-D Exit Ticket Station



- 10.1 inch wide temperature high brightness LCD screen, support text, two-dimensional code and other information display, support picture, video loop playback
- Device integrated IC card reader, support card upload
- The device contains 1 relay-out interface, which can be used for remote control barrier
- Support real-time voice intercom function, Integrated echo cancellation and noise cancellation technology
- Support SDK protocol

## ▪ Specification


| Audio                            |  |
|----------------------------------|--|
| Audio Encoding                   | G.711U   |
| Audio Bit Rate                   | 64 Kbps  |
| Audio Input                      | All-directional microphone                       |
| Audio Output                     | loudspeaker 5.5W                                 |
| Audio Quality                    | Echo suppression, Noise cancellation             |
| Two-Way Audio Mode               | Full duplex two-way voice intercom               |
| Network                          |  |
| Interface Protocol               | TCP/IP   |
| Scan and Recognition             |  |
| Recognition Distance             | 0-9cm  |
| Recognition Type                 | Bar code, QR code                                |
| Display Screen                   |  |
| Screen Type                      | 10.1 inch LCD screen 1080P                       |
| Interface                        |  |
| Alarm Input                      | 2  |
| Alarm Output                     | 2  |
| Network Interface                | 10M/100M self-adaption × 1                       |
| Card Reader                      |  |
| Card Reader Type                 | IC card, CPU card                                |
| Card Reader Frequency            | 13.56MHz   |
| General                          |  |
| Working Temperature and Humidity | -40°C ~ 70°C<br>10% ~ 95%                        |
| Power Supply                     | 220V 50Hz  |
| Power Consumption                | <50W 220VAC                                      |
| Dimensions                       | 230 × 237.5 × 1386 mm (9.06 × 9.35 × 54.57 inch) |
| Protection                       | IP54   |
| Weight                           | 16.86 kg (37.17 lb.)                             |
| Weight (with Package)            | 19.51 kg (43.01 lb.)                             |
| Dimensions (with Package)        | 320 × 360 × 1492 mm (12.6 × 14.17 × 58.74 inch)  |
| Operating System                 | Embedded Linux System                            |

## ▪ Available Model

DS-TMT202-D

DS-TMT202-D(Go pass)

## ▪ Dimension

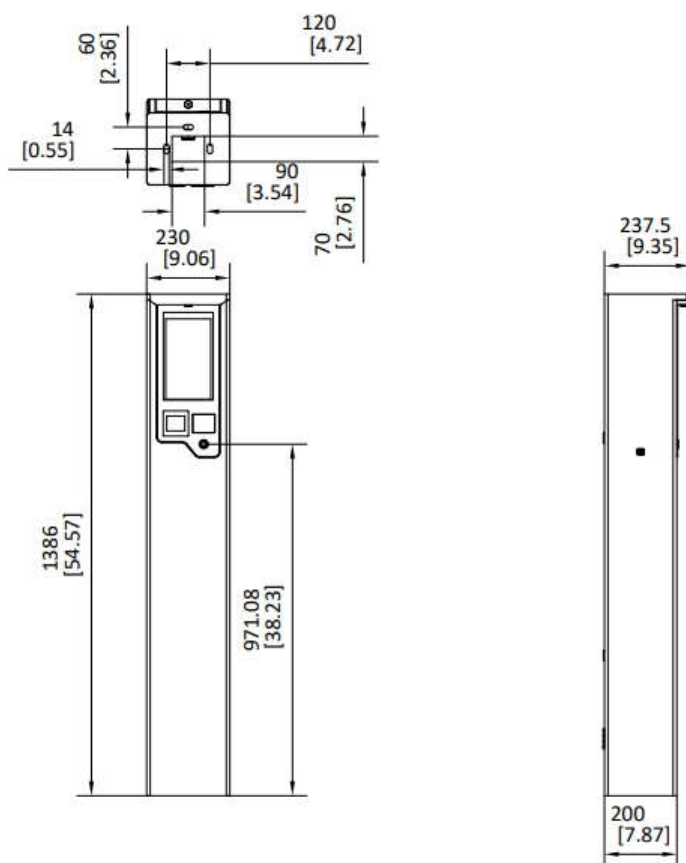

L × W × H: 230 mm × 237.5 mm × 1386 mm (9.06 × 9.35 × 54.57)

Unit: mm [inch]

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

