

DS-UAC-S2V Multi-Mic Conference Speakerphone



- Adopts 4-mic array, picking up 360° clear sound with 3 meters range
- Adopts the HD speaker
- Supports steady and transient smart noise reduction, echo and squeal suppression, anti-reverberation to enhance speech quality and offer audio in high quality
- Supports USB cable connection, plug and play
- Compatible with leading online conferencing platform


• Specification

Microphone	
Type	MEMS
Direction	360° Omni-directional
Pickup Distance	In the radius up to 3 m
Amount	4
Frequency Response	100 Hz to 8 kHz
Sensitivity	-38 dBV/Pa
SNR	66 dB
Sampling Rate	16 kHz
Dynamic Range	94 dB
Acoustic Overload Point (AOP)	124 dB SPL
Total Harmonic Distortion (THD)	0.15% @94 dB SPL, 1 kHz
3A Algorithm	AEC, ANS, AGC
Speaker	
Rated Power	3 W
Maximum Output Loudness	82 dB SPL @1 m, average value of 500 Hz, 800 Hz, 1 kHz and 2 kHz
Speaker Range	In the radius up to 5 m
Effective Bandwidth (-10 dB)	150 Hz~16 kHz
Total Harmonic Distortion (THD)	<3% @ 1 kHz
Functions	
Audio Function	Supports steady and transient smart noise reduction, echo suppression, anti-reverberation, squeal suppression and enhanced vocals to enhance speech quality and offer audio in high quality
LED Indicator	Five LED indicators solid white: Speakerphone is working. Five LED indicators solid red: Speakerphone is not working.
Communication	
Communication Method	USB3.0 cable
Wired Communication Distance	Cable length: 0.9 m. Transmission distance: 0.9 m.
Interface	
Cable	Type A interface
Compatibility	
System Requirement	Windows XP/7/8/10/11 Android 8.1 and above version Linux 4.14 and above version macOS 10.12 and above version
General	
Power	5 VDC ± 5%, max. 4.5 W
Operating Condition	0 °C to 45 °C (32 °F to 113 °F). Humidity 90% or less (non-condensing)
Dimension	120 mm × 120 mm × 41.4 mm (4.72" × 4.72" × 1.63")
Package Dimension	152 mm × 146 mm × 52 mm (5.98" × 5.75" × 2.05")
Weight	275 g (0.61 lb.)
With Package Weight	385 g (0.85 lb.)
Packing List	Speakerphone × 1 Quick Start Guide × 1

▪ **Available Model**

DS-UAC-S2V

▪ **Dimension**

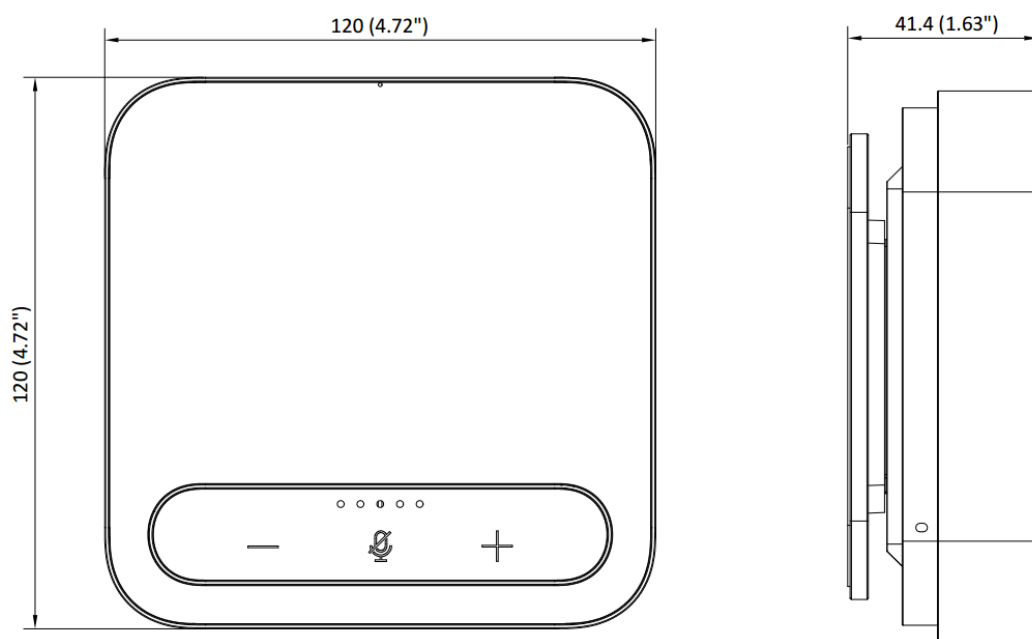

Unit: mm (inch)

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq