

## DS-2CE19D0T-VFIT3E(C) 2 MP PoC Manual Varifocal Bullet Camera



- 2 MP vari-focal PoC bullet camera
- 2.7 mm to 13.5 mm varifocal lens
- Up to 40 m IR distance for bright night imaging
- Water and dust resistant (IP67)
- Transmits both HD video and power over the same coaxial cable


## ▪ Specification

Camera	
Image Sensor	2 MP CMOS
Signal System	PAL/NTSC
Resolution	1920 (H) × 1080 (V)
Frame Rate	PAL: 1080p @ 25 fps NTSC: 1080p @ 30 fps
Min. Illumination	0.01 Lux @(F1.6, AGC ON), 0 Lux with IR
Day & Night	ICR
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Lens	Varifocal lens, manual adjustment, 2.7 mm to 13.5 mm optional
Field of View	Horizontal FOV: 98° to 30°, vertical FOV: 52° to 17°, diagonal FOV: 116° to 35°
Lens Mount	Φ14
WDR (Wide Dynamic Range)	Digital WDR
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 180°, Rotation: 0 to 360°
Image	
Day/Night Mode	Auto/Color/BW (Black and White)
Image Mode	STD/HIGH-SAT
AGC	Yes
White Balance	Auto/Manual
AE (Auto Exposure) Mode	DWDR, BLC, HLC, Global
Noise Reduction	2D DNR
Language	English
Function	Brightness, Smart IR, Sharpness
Interface	
Video Output	1 HD analog output
General	
Power	12 VDC ± 25%, PoC.at. Max. 5 W, *You are recommended to use one power adapter to supply the power for one camera.
IR Range	Up to 40 m
Operating Conditions	-40°C to 60°C (-40°F to 140°F). Humidity: 90% or less (non-condensing)
Protection Level	IP67
Material	Front cover: Metal, Main body: Plastic
Communication	HIKVISION-C
Dimension	78.2 mm × 83.3 mm × 256.4 mm (3.08" × 3.28" × 10.09")
Weight	Approx. 575 g (1.27 lb.)

## ▪ Available Model

DS-2CE19D0T-VFIT3E(2.7-13.5mm)(C)

## ▪ Dimension

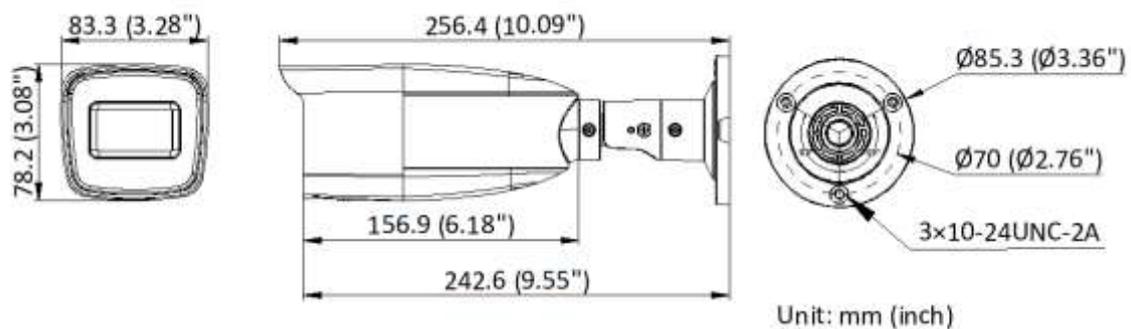

▪ **Accessory**

▪ **Optional**

DS-1275ZJ-SUS Vertical pole mount	DS-1276ZJ-SUS Corner mount	DS-1280ZJ-M Junction box



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

