

## ISD-SC6550SA-E2CL X-ray Security Inspection System

ISD-SC6550SA-E2CL X-ray security inspection system integrates. The product is suitable for government agencies, transportation hubs, logistics industry, courts, procuratorates, prisons, embassies, factories, schools, hospitals, stadiums, exhibition halls, entertainment venues and other scenes, can be used for the safety inspection of briefcases, postal bags, express mail, portable luggage and small parcels.



- **Advanced Identification Technology** can effectively identify the equivalent atomic number of the inspected material and give different colors
- **Low Radiation Dose** The radiation leakage dose rate reaches the natural environmental background level, far lower than the national standard requirements
- **Security Networking** supports access to the higher security screening networking management platform to achieve data management
- **Data Storage** support scanning images. video, pictures, alarm information in local storage, viewing, calling
- **Event Tracing** X-ray images can be combined with passenger video information to achieve human package tracing



## ▪ Specification


Model		ISD-SC6550SA-E2CL
Size	Tunnel Size	650mm×500mm ( W×H )
	Dimension	1831mm×890mm×1300mm ( L×W×H )
Performance	Line Resolution	32AWG standard, 36AWG typical
	Penetration Steel panel	8mm standard, 10mm typical
	Spatial Resolution	1.3mm(Horizontal and vertical)
	X-Ray Generator	80kV 0.6mA(Adjustable)
	X-Ray Cooling/Work Period	Oil Cooling/Continuous
	Film Security	Standard of ASA/ISO1600
System Function	Additional Feature	64 times continuous zoom in, Displays the date/time , Luggage counter , user-id, High density alarm, TIP, Operation training system, System running timer, X-ray emitting timer
Radiation	Leakage	< 1μGy/h, 50mm away from the device sheet
Conveyor	Conveyor Height	600mm
	Speed	0.2m/s
Video	Sensor Type	1/2.8" Progressive Scan CMOS
	Camera	2 ch (each at entrance and exit)
	Video Compression Standard	H.265 /H.264 / MJPEG
	Max. Image Size	1920× 1080
	Frame Rate	50Hz: 25fps (1920× 1080, 1536× 864, 1280 × 720)
	Storage Time	≥30 days
Display	Screen Size	21.5", Single Screen,1920×1080
General	Noise level	< 60dB(A) , 1m distance
	Consumption	< 0.8KVA
	Power	220VAC(±10%) 50±3Hz
	Operating Humidity	10% to 95%(No Condensation)
	Operating Temperature	0°C to 45°C
	Weight	500 kg

\* Stated performance as measured by HIKVISION Imaging Standard Test Piece

## ▪ Available Model

ISD-SG6550S-2CVL	Main machine	X-Ray Intelligent Security Check Machine, monitor, mouse included.
	Exit table/ carrier	0.6 m exit Flat table included.

## Dimension

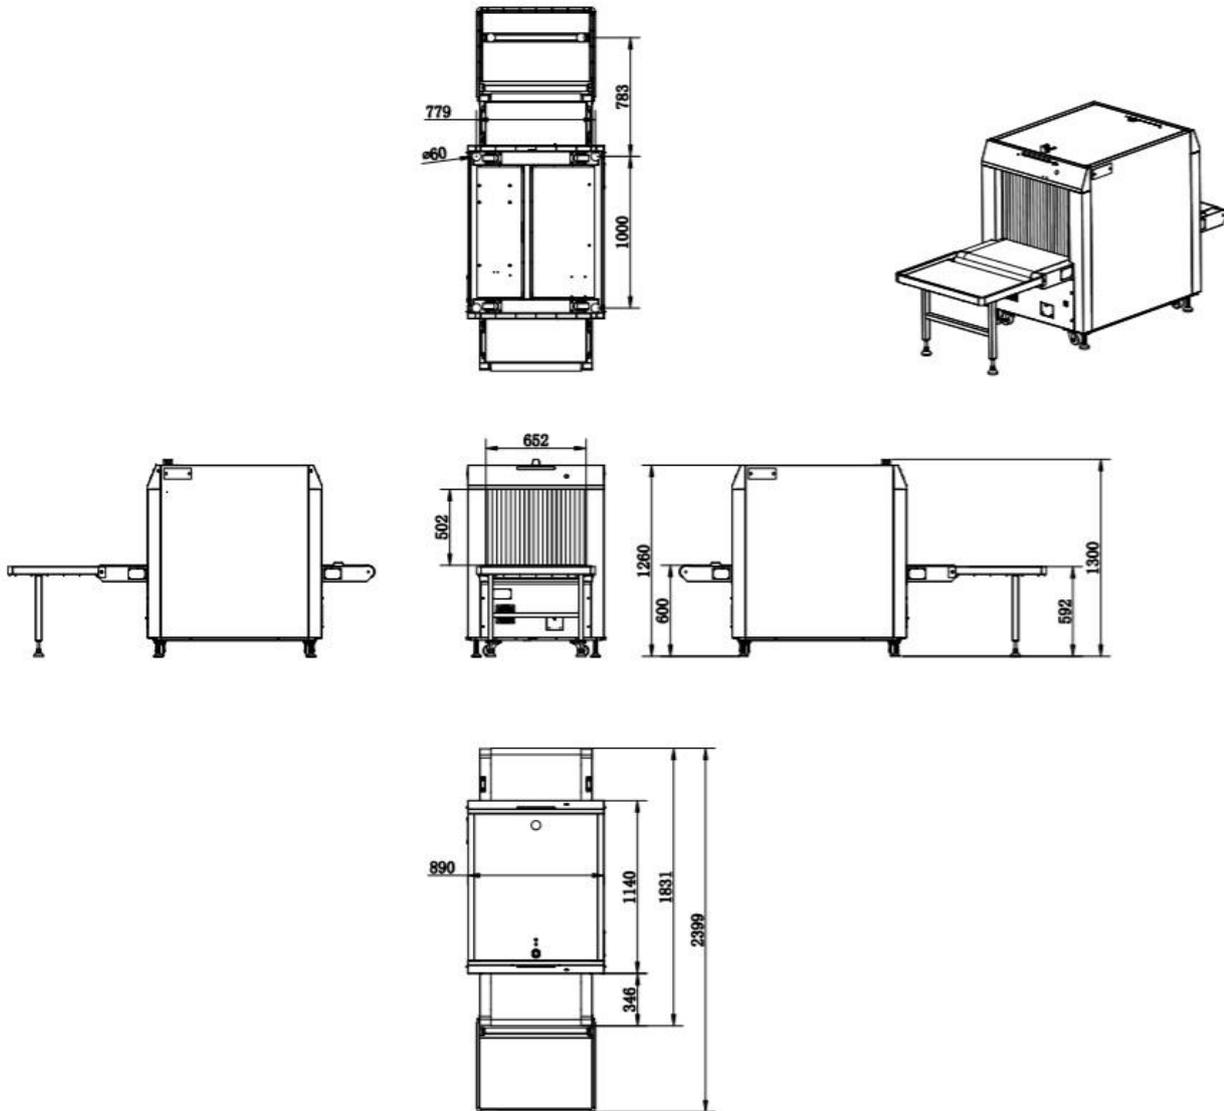

## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-[0]31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com