

DS-9600
128-ch



- Up to 128-ch IP camera inputs
- Up to 48-ch@1080p decoding capacity
- Up to 1 Gbps incoming bandwidth and 1 Gbps outgoing bandwidth
- Supports special cameras, including people counting camera, ANPR (automatic number plate recognition) camera, and fisheye camera
- Advanced streaming technology enables smooth live view in poor network conditions
- Supports RAID 0, 1, 5, 6, 10 and N+1 hot spare for even more reliable data storage, effectively avoids data loss risks

*****Professional and Reliability**

*? H.265+ compression effectively reduces the storage space by up to 75%

*? Dual-stream recording saves bandwidth

*? Adopt stream over TLS encryption technology which provides more secure stream transmission service

*? Support double verification for playback and downloading

*HD Video Output

*? Provide independent HDMI and VGA outputs

*? HDMI video outputs at up to dual 4K resolution, DP video outputs at up to dual 8K resolution

*Storage and Playback

*? 24 SATA interfaces for HDD connection (up to 20 TB capacity per HDD)

*? 1 eSATA interface for HDD connection

*? 16-ch synchronous playback

*Smart Function

*? Support multiple VCA (Video Content Analytics) events

*? Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, and

*people counting

*Network ☐ Ethernet Access

*? 4 self-adaptive 10/100/1000 Mbps Ethernet interfaces


*? Hik-Connect ☐ DDNS (Dynamic Domain Name System) for easy network management

■ Specification

Video and Audio	
IP Video Input	128-ch
Incoming Bandwidth	1024 Mbps
Outgoing Bandwidth	1024 Mbps
Incoming Bandwidth (RAID Mode)	1024 Mbps
Outgoing Bandwidth (RAID mode)	1024 Mbps
HDMI 1 Output	4K (4096 × 2160)/30 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
HDMI 2 Output	4K (3840 × 2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
VGA Output	1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
DP 1	8K (7680 × 4320)/30Hz, 4K (4096×2160)/30 Hz, 4K (3840×2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
DP 2	8K (7680 × 4320)/30Hz, 4K (4096×2160)/30 Hz, 4K (3840×2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
V-DP 1	8K (7680 × 4320)/30Hz, 4K (4096×2160)/30 Hz, 4K (3840×2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
V-DP 2	8K (7680 × 4320)/30Hz, 4K (4096×2160)/30 Hz, 4K (3840×2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
Video Output Mode	Provide 4 groups of video outputs. The video outputs in the same group provide simultaneous output, and the video outputs between each group provide independent output. Group 1: HDMI 1/VGA/LCD Group 2: HDMI 2 Group 3: DP 1/V-DP 1 Group 4: DP 2/V-DP 2 Note: After enabling DP 1/DP 2, V-DP 1/V-DP 2 would be unavailable.
Two-Way Audio	1-ch, 3.5mm
Audio Output	1-ch, 3.5mm
Decoding	
Decoding Format	H.265+/H.265/H.264+/H.264
Recording Resolution	32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	16-ch
Decoding Capability	3-ch@32 MP (30 fps)/3-ch@24 MP (30fps)/6-ch@16 MP (30fps)/12-ch@8 MP (30fps)/24-ch@4 MP (30fps)/48-ch@2 MP (30fps) *: The length or width of camera resolution (each track) cannot exceed 4096 pixels.
Audio Compression	G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM
Network	
Network Interface	4, RJ-45 10/100/1000/2500 Mbps self-adaptive Ethernet interface
Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS

Remote Connection	256
RAID	
RAID Type	RAID0, RAID1, RAID5, RAID6, RAID10
Auxiliary Interface	
eSATA	1 eSATA interface
SATA	24 SATA interfaces supporting hot-plug
Capacity	Up to 20 TB for each HDD
Serial Interface	1 RS-485 (full-duplex), 1 RS-232
Alarm In/Out	16/8
USB Interface	Front panel: 2 × USB 2.0; Rear panel: 4 × USB 3.0
General	
Power Supply	100 to 240 VAC, 50 to 60 Hz, redundant power supply
Consumption	≤ 75 W (without HDD)
Working Temperature	0 °C to + 50 °C (32 °F to 122 °F)
Working Humidity	10% to 90%
Chassis	4U chassis
Dimension (W × D × H)	447 × 489 × 173 mm (17.6" × 19.3" × 6.8")
Weight	≤25 kg (without HDD, 55.1 lb.)

Physical Interface

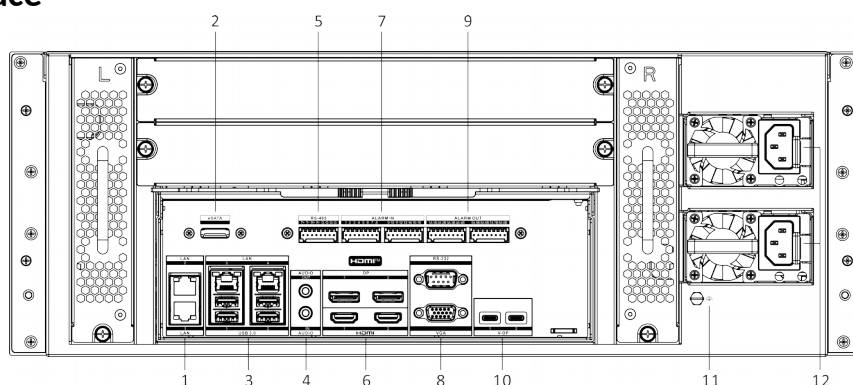

No.

1

D e s c r i p t i o n	N o .	D e s c r i p t i o n
L A N	7	A l a r m i n t e r f

		a c e s		
2		e S A T A i n t e r f a c e	8	V G A i n t e r f a c e a n d R S - 2 3 2 s e r i a l i n t e r f a c e
3		U S B	9	A l a r

		3 · 0		
		a n d		
		L A N		m
		i n t e r f a c e s		o u t
4		A u d i o	1 0	V - D P
		i n a n d		i n t e r f a c e s
5		o u t		
		R S - 4 8 5	1 1	G N D
		s e r		

6				i a l i n t e r f a c e		
				H D M I a n d D P i n t e r f a c e s	1 2	P o w e r s u p p l y

■ Available Model

- DS-96128NI-H24R(STD)
- DS-96128NI-H24R(NEU)
- DS-96128NI-H24R(STD)/ISS

■ Dimension

Scale 1:1 Unit: mm

