


**DS-QAE0420G1-V**  
**Analog Column Speaker 20W**

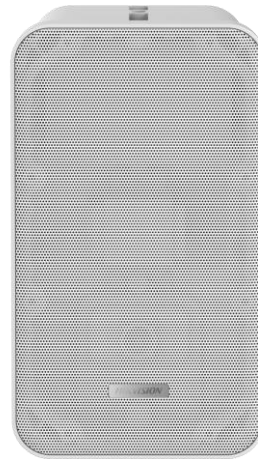

- The speaker unit adopts aerospace magnetic, imported adhesive coating, and lightweight sound film design, with high sensitivity, bright sound, and long transmission distance
- Adopt professional engineering reinforced plastics with high strength
- By using L-brackets, the installation surface angle can be adjusted for convenient installation
- Professional integrated design, supporting IP66 waterproof, with a simple and beautiful appearance

## ▪ Specification




Interface	
Audio In	Green end (terminal block), constant voltage input : 100 V , COM
Approval	
Protection	IP66
Speaker	
Impedance	8 $\Omega$
Rated Power	20 W
Sensitivity(1 m, 1 W)	89.5 dB $\pm$ 3 dB
Max. Acoustic Pressure	96 dBSPL
Frequency Response	100 Hz to 20 kHz
Speaker Unit	Full frequency 4" $\times$ 1 , high frequency 0.75" $\times$ 1
Coverage Angle	Horizontal: 150° Vertical: 160°
General	
Color	White
Material	Front cover : steel mesh, back cover: plastic
Dimension	280 mm $\times$ 161.9 mm $\times$ 119.8 mm (11.02" $\times$ 6.37" $\times$ 4.72")
Weight	Approx. 1862.4 g (4.11 lb.)
Package Dimension	340 mm $\times$ 306 mm $\times$ 175 mm (13.39" $\times$ 12.05" $\times$ 6.89")
With Package Weight	2610.2 g (5.75 lb.)
Packing List	Device $\times$ 1 Screw pack $\times$ 1 L-Bracket $\times$ 2 Regulatory Compliance and Safety Information $\times$ 1
Operating Temperature	-25 $^{\circ}$ C to 55 $^{\circ}$ C(-13 $^{\circ}$ F to 131 $^{\circ}$ F)
Operating Humidity	< 90% (No condensation)

*\*The device should be used together with amplifier.*

## ▪ Available Model

DS-QAE0420G1-V

## ▪ Dimension

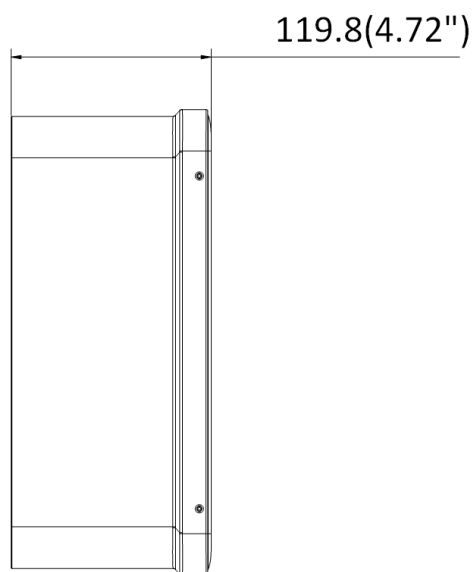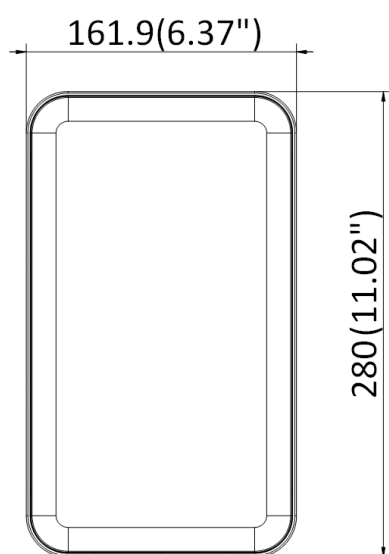

Unit: mm (inch)

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

