


NS-0508D

8 Port Gigabit Unmanaged Desktop Switch



- 8 x 10/100/1000 Mbps ethernet ports
- Supports MDI/MIDX
- Store-and-forward switching
- Supports MAC address auto-learning and aging
- Simple, compact body design
- Supports desktop and wall-mounting
- Plug & play, easy to use




Specification

	Model	NS-0508D
Network Parameters	Ports	8 × Gigabit RJ45 port
	MAC Address Table	4 K
	Switching Capacity	16 Gbps
	Packet Forwarding Rate	11.90 Mpps
	Internal Cache	1.5 Mbits
General	Shell	ABS
	Net Weight	0.093 kg (0.205 lb)
	Gross Weight	124.00 mm × 25.00 mm × 61.00 mm (4.88" × 0.98" × 2.40")
	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Operating Humidity	5% to 95% (no condensation)
	Relative Humidity	5% to 95% (no condensation)
	Power Supply	5 VDC, 1 A
	Installation Mode	Desk-Mounted
Approval	EMC	CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3:
		2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020)
	Safety	UL (UL 60950-1),CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition),
		CE-LVD (EN 62368-1: 2014+A11: 2017)
	Chemistry	CE-RoHS (2011/65/EU), WEEE (2012/19/EU), Reach (Regulation (EC) No.1907/2006)

Available Model

NS-0508D


Physical Interface

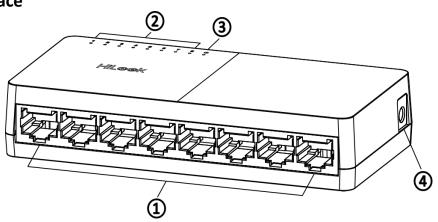

No.	Indicator/Port	Description
① ②	Gigabit RJ45 Port	Used for connection to another device via a network cable.
2	LINK/ACT Indicator	Indicates the statuses of Gigabit RJ45 ports 1 to 8.
3	PWR Indicator	Indicates the power status of the switch.
4	Power Supply	Use the attached power adapter or power cord to connect the switch to a socket.



Dimension

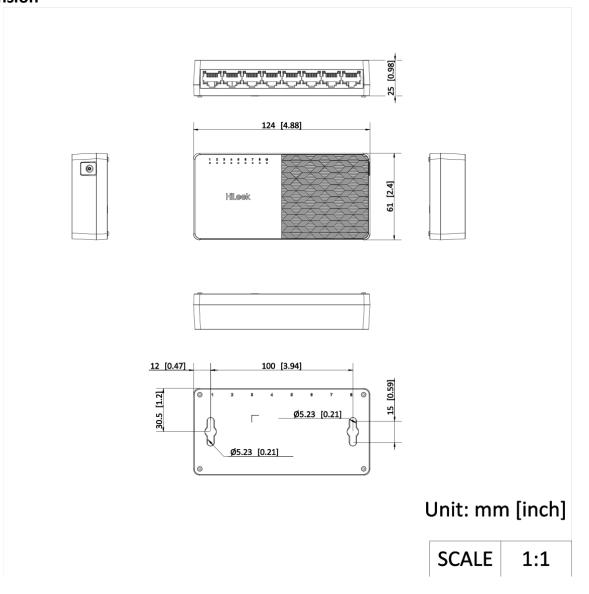

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T+86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.



sion



HikvisionHQ



HikvisionHQ





