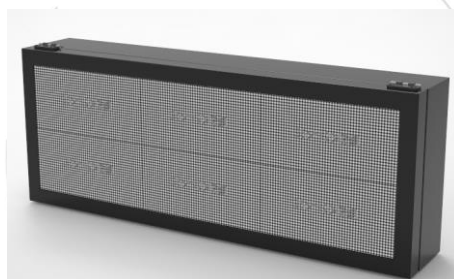


DS-TVL232-6-8P**Platform Information Guidance Screen**

- Placed in the Platform, displaying the vehicle informations
- Displaying different content according to the instruction from the host computer
- Displaying standard English characters, numeric characters, Korean characters, etc
- Standard communication method is RJ45


▪ Specification

Installation	
Maintenance Mode	Front
Display Screen	
Pixel Pitch	P8
Resolution	96*32
Screen Type	LED
Display Color	Seven Colors
Number of Module	6
Viewing Angle	120° (H) / 120° (V)
Display Mode	instant, left shift, up forward, etc.
Pixel Pitch Category	8
Color Temperature	3000k to 6000k
Brightness Uniformity	≥95%
Color Uniformity	≥95%
Contrast Ratio	2000 : 1
Luminance	4500cd/m ²
Scanning Mode	4S
Communication Mode	TCP
General	
Working Temperature and Humidity	-30 to 60 °C 10% to 85% RH
Power Supply	AC110-240V,50/60Hz,max0.5A
Package Dimensions	960mm*450mm*290mm
Dimensions	830 × 318 × 151 mm (32.68 × 12.52 × 5.94 inch)
Weight	18 kg (39.68 lb.)
Weight (with Package)	20 kg (44.09 lb.)
Storage Temperature and Humidity	-40 to 70 °C 10% to 85% RH
Average Consumption	50W
Max. Consumption	150W
Lifespan	100000Hours
Approval	
Protection	IP54

▪ Available Model

DS-TVL232-6-8P

▪ Dimension

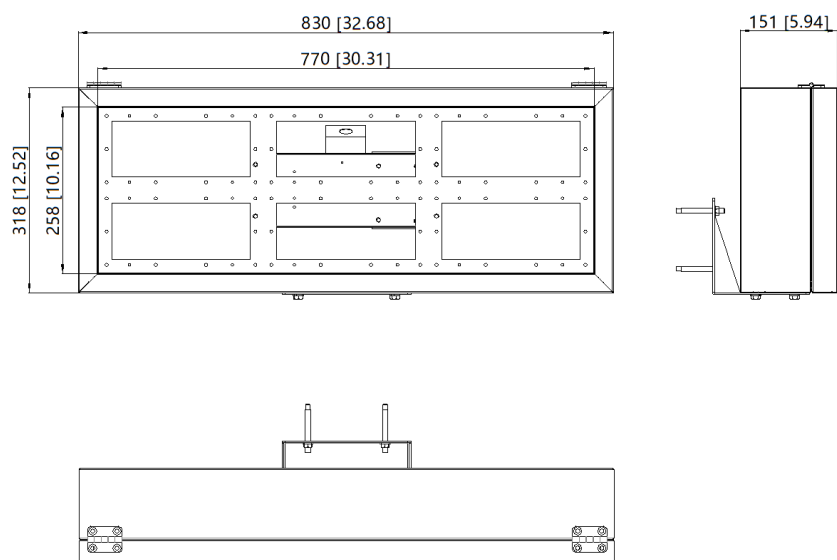

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq