

**DS-D5032F3-1V0S****32 inch FHD 75Hz VA Monitor with Speaker**

- VA technology , 178° ultra-wideview screen.
- 8 bit LVDS FHD (1920 × 1080) display.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

## ▪ Specification


<b>Display</b>	
Screen Size	32 inch , 81.3 cm
Active Display Area	698.4 (H) mm × 392.85 (V) mm, 27.44 dm <sup>2</sup>
Resolution	1920 × 1080
Backlight	D-LED
Pixel Pitch	0.12125 (H)mm × 0.36375 (V) mm
Brightness	300 cd/m <sup>2</sup>
Viewing Angle	178° (H) / 178° (V)
Color Depth	8 bit
Contrast Ratio	4000 : 1
Response Time	8 ms
Refresh Rate	Typ. 60 Hz , Max. 75 Hz
Haze	Haze 2 %
Reliability	7 × 24 H
Color Gamut	72 % NTSC
<b>Interface</b>	
Video & Audio Input	VGA × 1 , HDMI 1.4 × 1 , Audio Output × 1
Video & Audio Output	Speaker(8Ω 10W) × 2
Data Transmission Interface	None
Control Interface	None
<b>Power</b>	
Power Supply	100~240 VAC, 50/60 Hz
Power Consumption	≤ 48 W
Standby Consumption	≤ 0.5 W
<b>Working Environment</b>	
Working Temperature	0°C to 40°C (32°F to 104°F )
Working Humidity	20% to 90% RH (Non-Condensing)
Storage Temperature	-20°C to 60°C (-4°F to 140°F )
Storage Humidity	10% to 90% RH (Non-Condensing)
<b>General</b>	
Casing Material	Plastic
VESA	100 mm × 100 mm (4 - M6 × 10 mm)
Bezel Width	16.7 mm (top/left/right), 20.5 mm (bottom)
Product Dimensions (W × H × D)	With base: 735.08 (W) mm × 489.16 (H) mm × 207.95 (D) mm Without base: 735.08 (W) mm × 433.46 (H) mm × 80.19 (D) mm
Standby Time	600s
Package Dimensions (W × H × D)	808 (W) mm × 510 (H) mm × 140 (D) mm
Net Weight	4.55 ± 0.5 kg
Gross Weight	6.1 kg ± 0.5 kg
Packing List	Monitor × 1, Base component × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1 , remote control × 1 , Base screw × 6 , Wall-mount screw × 4
Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information

▪ Physical Interface



Interface	Description	Interface	Description
POWER	AC power input interface	HDMI	HDMI 1.4 digital signal input interface
VGA	VGA analog signal input	AUDIO OUT	3.5 mm Audio output interface

▪ Dimension

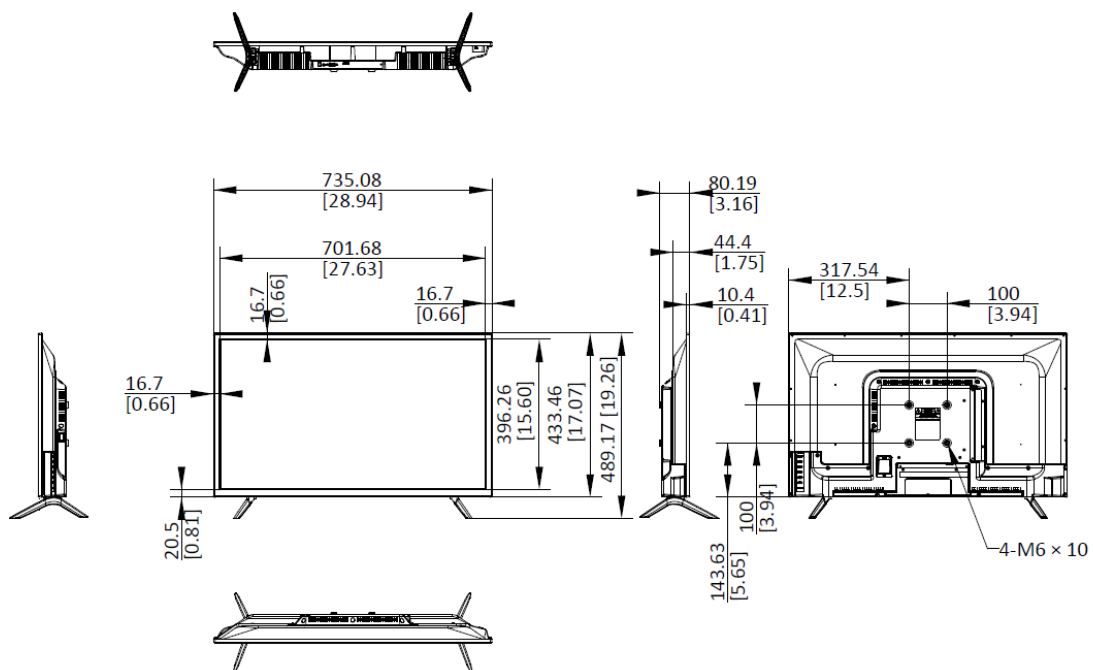

Unit: mm [inch]

▪ Accessory


▪ Optional

DP-D501940-1X1-Q

1-NW-Q0.1-TY/V20

DS-DM1940W

0

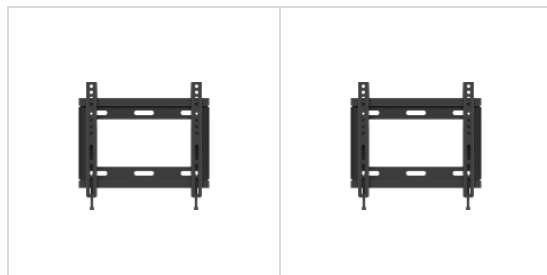

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

