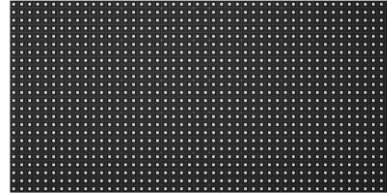



DS-D43Q60CA-1PH**DS-D43Q60CA-1PH,outdoor,6.0mm,320*160mm,3840hz**

- Supports seamless image stitching in any direction, size and shape and displays stitched images uniformly and consistently without black lines
- Uses the ultra-high refresh rate to display delicate and smooth video images
- High brightness and high contrast
- Support IP65

▪ Specification

Module	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P6.6
Pixel Pitch	6.67 mm
Dimensions (W × H × D)	320 mm × 160 mm × 18.4 mm
Resolution	48 × 24
Pixel Density	22500 dots/m ²
Maintenance Method	Back maintenance
Signal Source Interface	HUB75E
Module Flatness	0.2 mm
Waterproof Level	IP65 (Front)
Display	
White Balance Brightness	4500cd/m ²
Color Temperature	2000 ~ 14000K adjustable
Viewing Angle	Horizontal 140°, vertical 120°
Contrast Ratio	≥ 5000:1
Color Uniformity	≤ ± 0.003Cx , Cy
Brightness Uniformity	≥ 97%
Processing Performance	
Driving Method	Constant current driving , Scan : 6/S
Frame Frequency	60 Hz
Refresh Rate	Up to 3840 Hz
Grey Level	Up to 14 bit
Key Material	
Lamp Encapsulation	2727
Control System	DS-D42C08-H DS-D42C16-H
Power	
Power Supply	5V DC
Max. Consumption	≤ 644 W/m ² (4500nits)
Average Consumption	≤ 215 W/m ² (4500nits)
Working Environment	
Working Temperature	-20 °C to 50 °C (-4 °F to 120 °F)
Working Humidity	10%~80%RH
Storage Humidity	10%~90%RH
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
General	
Package Dimensions (W × H × D)	626 (W) mm × 372 (H) mm × 402 (D) mm (24.65 " × 14.65 " × 15.83 ")
Packing Method	40 pcs/BOX
Net Weight	0.425 kg/PCS
Weight	23.4 kg/BOX

▪ Dimension

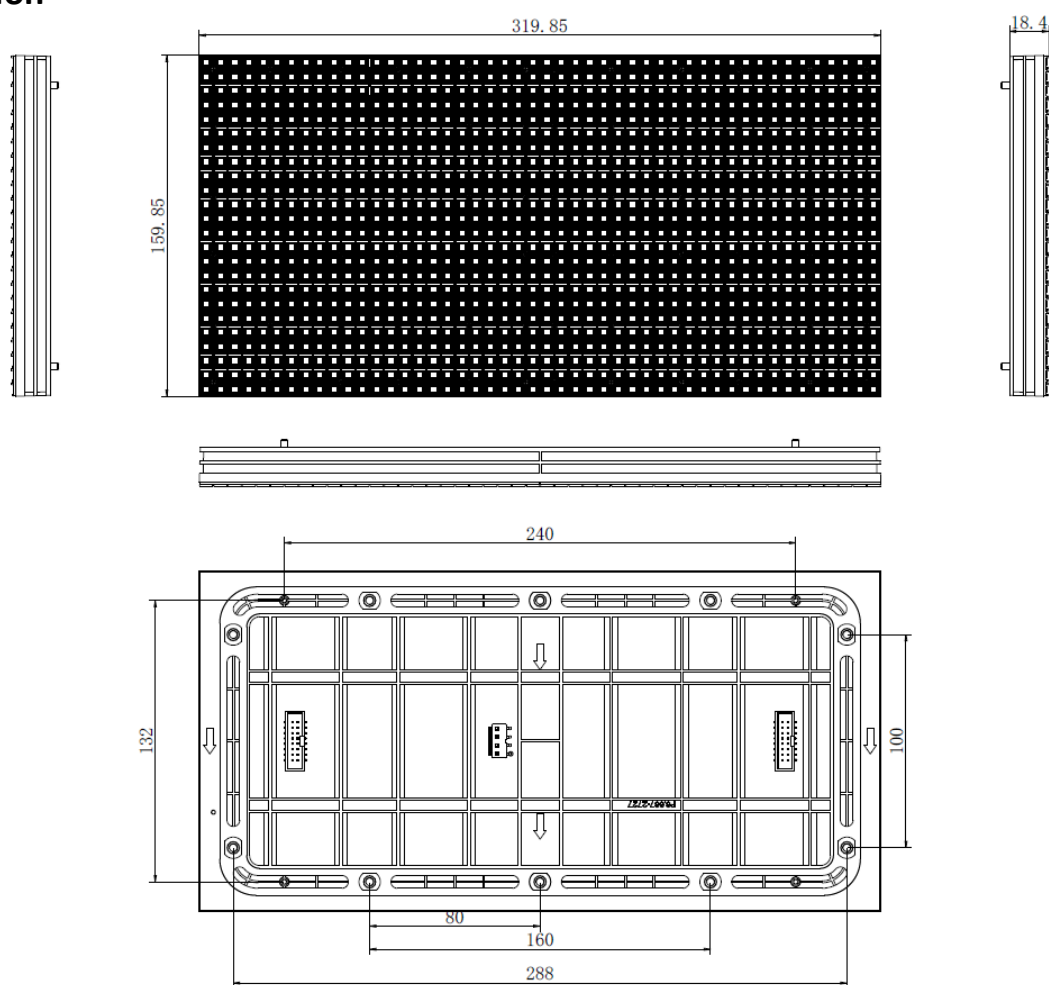

See Far, Go Further



www.hikvision.com
support@hikvision.com

