
DS-D43Q80CA-1PH
DS-D43Q80CA-1PH,outdoor,8.0mm,320*160mm,3840hz

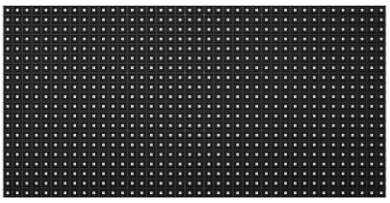

- Supports seamless image stitching in any direction, size and shape and displays stitched images uniformly and consistently without black lines
- Uses the ultra-high refresh rate to display delicate and smooth video images
- High brightness and high contrast
- Support IP65

▪ Specification


Display	
White Balance Brightness	4500cd/㎡
Color Temperature	2000 ~ 14000K adjustable
Viewing Angle	Horizontal 140°, vertical 120°
Contrast Ratio	≥ 5000:1
Color Uniformity	≤ ± 0.003Cx , Cy
Brightness Uniformity	≥ 97%
Module	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P8.0
Pixel Pitch	8 mm
Dimensions (W × H × D)	320 mm × 160 mm x 19 mm
Resolution	40 × 20
Pixel Density	15625 dots/m²
Maintenance Method	Back maintenance
Signal Source Interface	HUB75E
Module Flatness	0.2 mm
Waterproof Level	IP65 (Front)
Processing Performance	
Driving Method	Constant current driving
Frame Frequency	60 Hz
Refresh Rate	Up to 3840 Hz
Grey Level	Up to 14 bit
Key Material	
Lamp Encapsulation	2727
Control System	DS-D42C08-H DS-D42C16-H
Power	
Power Supply	110~220 VAC ± 15%
Max. Consumption	≤ 500 W/m² (4500nits)
Average Consumption	≤ 170 W/m² (4500nits)
Working Environment	
Working Temperature	-20 ℃ to 50 ℃ (-4 ℉ to 120 ℉)
Working Humidity	10%~80%RH
Storage Humidity	10%~90%RH
Storage Temperature	-20 ℃ to 60 ℃ (-4 ℉ to 140 ℉)
General	
Package Dimensions (W × H × D)	634 (W) mm × 410 (H) mm × 380 (D) mm (25 '' × 16 '' × 15 '')
Net Weight	0.56 kg
Weight	0.56 kg

▪ Available Model

DS-D43Q80CA-1PH，outdoor，8.0mm，320*160mm

DS-D43Q80CA-1PH/5，outdoor，320*160/5500

▪ Dimension

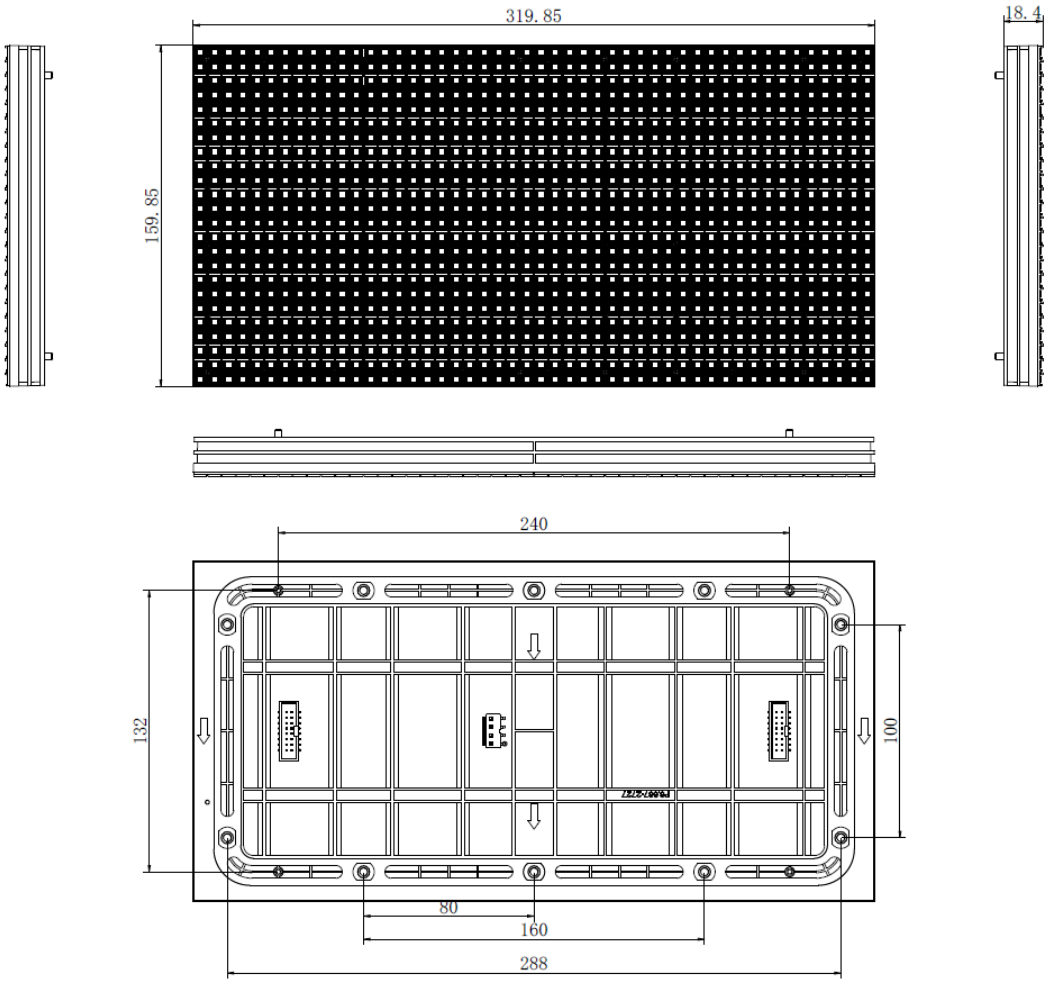

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®