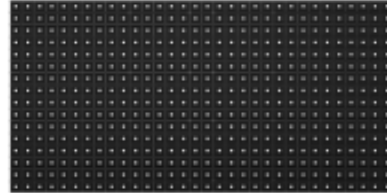


**DS-D43QA0CA-1PH****DS-D43QA0CA-1PH, outdoor, 10.0mm, 320\*160mm, 3840hz**

- Supports seamless image stitching in any direction, size and shape and displays stitched images uniformly and consistently without black lines
- Uses the ultra-high refresh rate to display delicate and smooth video images
- High brightness and high contrast
- Support IP65

## ▪ Specification


| Display                        |                                                            |
|--------------------------------|------------------------------------------------------------|
| White Balance Brightness       | 4500cd/m <sup>2</sup>                                      |
| Color Temperature              | 2000 ~ 14000K adjustable                                   |
| Viewing Angle                  | Horizontal 140°, vertical 120°                             |
| Contrast Ratio                 | ≥ 5000:1                                                   |
| Color Uniformity               | ≤ ± 0.003Cx , Cy                                           |
| Brightness Uniformity          | ≥ 97%                                                      |
| Module                         |                                                            |
| Pixel Configuration            | SMD Triad LED                                              |
| Pixel Pitch Category           | P10.0                                                      |
| Pixel Pitch                    | 10 mm                                                      |
| Dimensions (W × H × D)         | 320 mm × 160 mm × 19 mm                                    |
| Resolution                     | 32 × 16                                                    |
| Pixel Density                  | 10000 dots/m <sup>2</sup>                                  |
| Maintenance Method             | Back maintenance                                           |
| Signal Source Interface        | HUB75E                                                     |
| Module Flatness                | 0.2 mm                                                     |
| Waterproof Level               | IP65 (Front)                                               |
| Processing Performance         |                                                            |
| Driving Method                 | Constant current driving                                   |
| Frame Frequency                | 60 Hz                                                      |
| Refresh Rate                   | Up to 3840 Hz                                              |
| Grey Level                     | Up to 14 bit                                               |
| Key Material                   |                                                            |
| Lamp Encapsulation             | 2727                                                       |
| Control System                 | DS-D42C08-H<br>DS-D42C16-H                                 |
| Power                          |                                                            |
| Power Supply                   | 110~220 VAC ± 15%                                          |
| Max. Consumption               | ≤ 500 W/m <sup>2</sup> (4500nits)                          |
| Average Consumption            | ≤ 170 W/m <sup>2</sup> (4500nits)                          |
| Working Environment            |                                                            |
| Working Temperature            | -20 °C to 50 °C (-4 °F to 120 °F )                         |
| Working Humidity               | 10%~80%RH                                                  |
| Storage Humidity               | 10%~90%RH                                                  |
| Storage Temperature            | -20 °C to 60 °C (-4 °F to 140 °F )                         |
| General                        |                                                            |
| Package Dimensions (W × H × D) | 634 (W) mm × 410 (H) mm × 380 (D) mm (25 " × 16 " × 15 " ) |
| Net Weight                     | 0.56 kg                                                    |
| Weight                         | 0.56 kg                                                    |

## ▪ Available Model

DS-D43QA0CA-1PH, outdoor, 10.0, 320\*160mm

DS-D43QA0CA-1PH, 320x160/module(INA-Z)

## ▪ Dimension

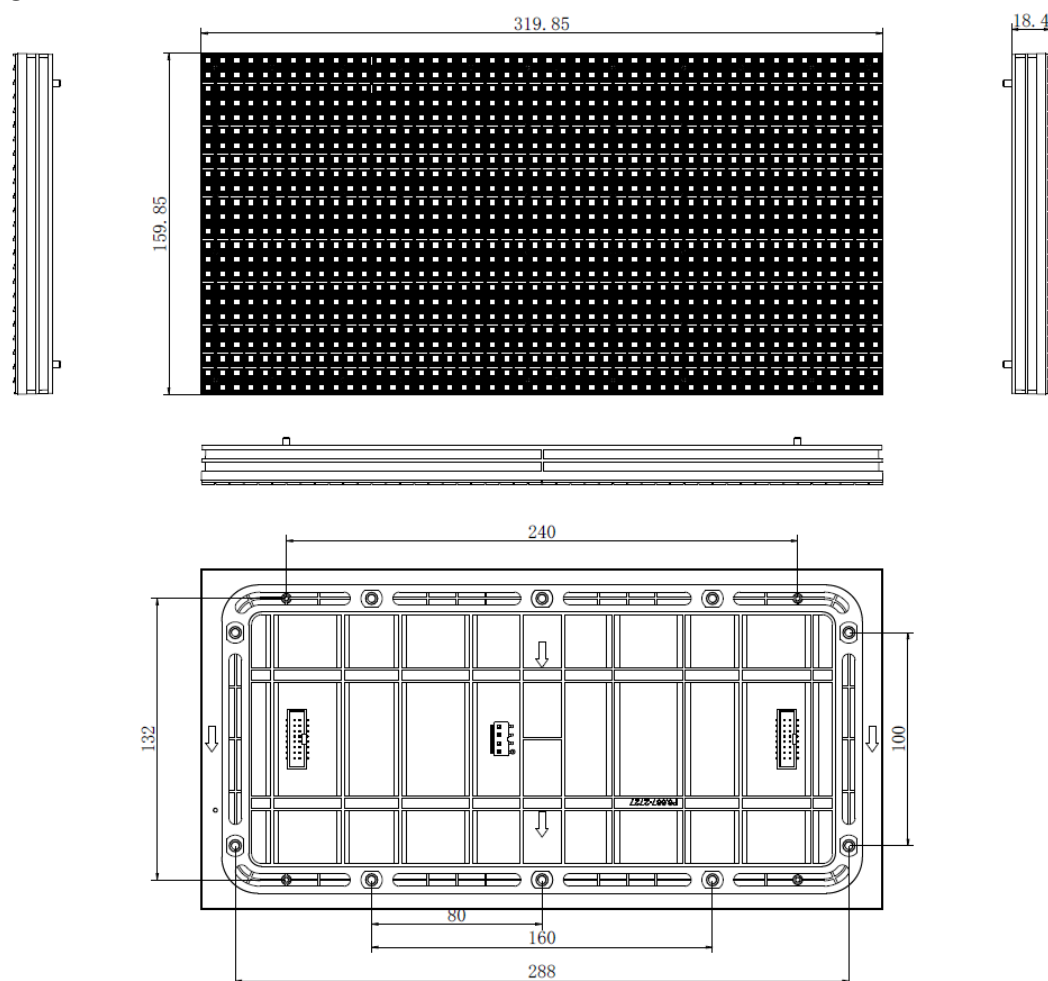

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

