

DS-C60S-02HI/4K **2-Channel 4K HDMI Input Board**




The video wall controller is mainly used for screen splicing control system, and is the core control device of the system. As a new-generation FPGA-based pure hardware image processing device, it adopts the structure of main control board and service boards. It supports the video input and video output via various ports. It supports the network encoding and real-time preview of signal sources. It supports the decoding and output of various network signal sources. It supports the high-definition (HD) video splicing and fusion. It supports the window splicing, roaming window, and other operations. It supports the management on users, network, operation, alarm and logs.

- Supports 2 channels of 4K HDMI signal input and YUV 444 collection.
- Supports input resolution in the range of 1080p@60 Hz to 4096 × 2160@60 Hz and custom input resolution.

▪ Specification

Chassis	
Occupied Slot	Input slot
Audio Input	
Audio Input Interfaces	2
Audio Input Interface Type	HDMI composite audio
Audio Sampling Rate	32K / 48K sampling rate
Audio Channel	Dual channel
Video Input	
Video Input Interface Type	HDMI 2.0
Video Input Interfaces	2
Video Input Resolution	4096 × 2160@60 Hz, 4096 × 2160@30 Hz, 3840 × 2160@60 Hz, 3840 × 2160@30 Hz, 1920 × 1200@60 Hz, 1920 × 1080p@60 Custom resolution: width ranges from 800 to 8192, height ranges from 600 to 8192. Width must be a multiple of 4 and height must be a multiple of 2. Frame rate is 30 Hz or 60 Hz. When configuring 30 Hz frame rate, the resolution ranges from 1920 × 1080 to 4096 × 2160. When configuring 60 Hz frame rate, the resolution ranges from 800 × 600 to 4096 × 2160.
Max. Video Input Resolution	4K

▪ Dimension

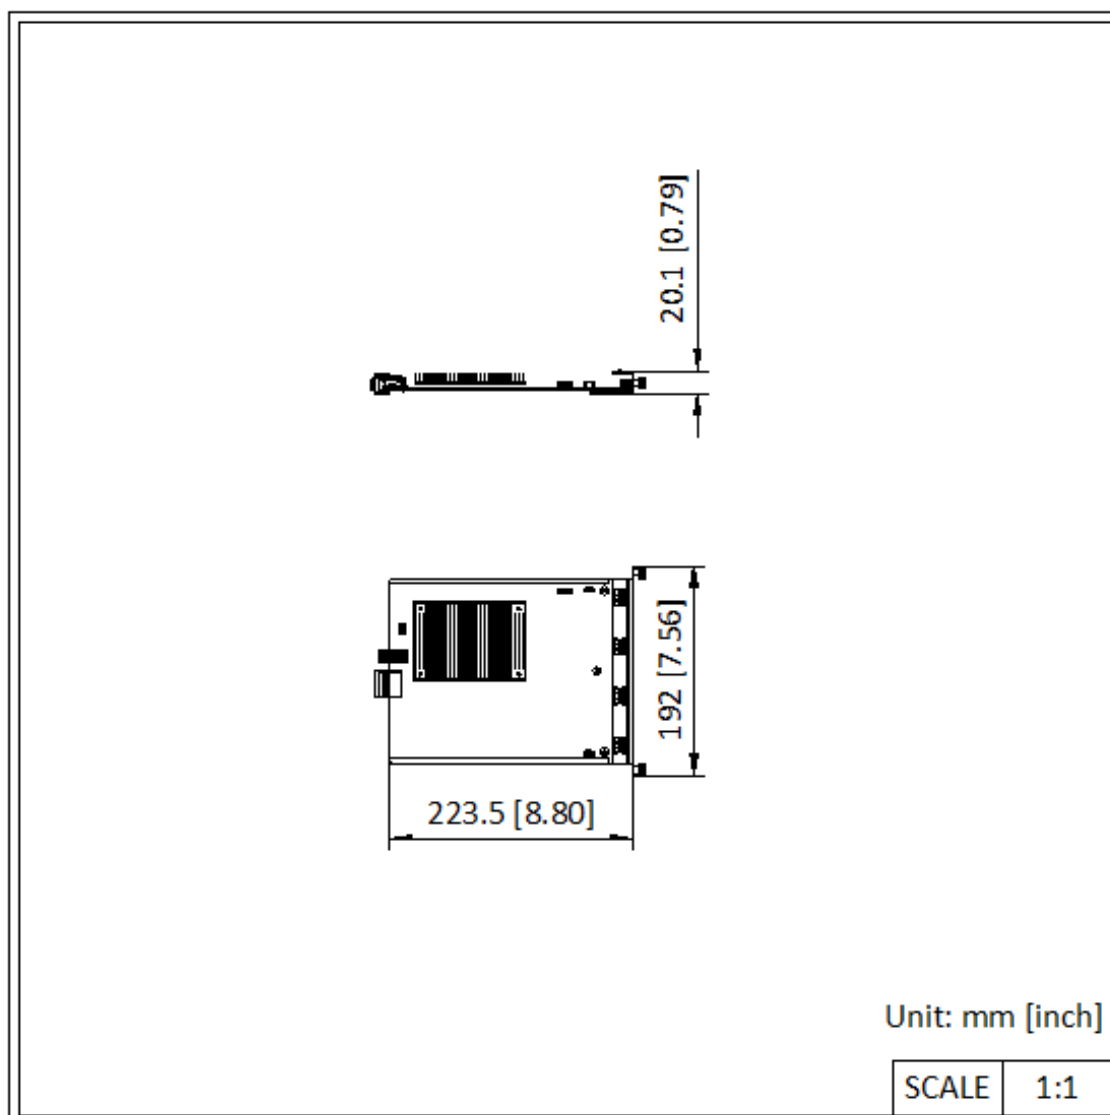

See Far, Go Further



www.hikvision.com
support@hikvision.com

