DS-7104NI-S1/W/KIT
H.265 WiFi NVS KIT






- Equipped with Wi Fi hotspot, one click to add wireless IPC
- Supports Micro SD card storage, up to 512GB
- Through the HC App, initialization configurations such as scanning and adding devices, formatting storage media, and adding IPC with just one click are completed, enabling remote preview and playback, channel intercom, pan tilt control, and other operations
- Through the HC App, device sharing, channel management, storage media management, recording plan settings, message settings, video encryption, and other configurations can be performed

▪ Specification

Video and Audio	
IP Video Input	4-ch
Incoming Bandwidth	20 Mbps
Outgoing Bandwidth	20 Mbps
Decoding	
Stream Type	Video, Video & Audio
Recording Resolution	6 MP/5 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF
Network	
Network Interface	1, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Wireless Parameter	
Frequency Band	2.4 GHz
Antenna Structure	High gain antenna
Transmission Speed	150 Mbps
Auxiliary Interface	
SD Card	32G/64G/128G/256G/512G
General	
Power Supply	12 VDC, 1 A
Consumption	≤ 6 W
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10 to 90 %
Dimension (W × D × H)	163 x 125 x 26 mm (6.4" × 4.9" × 1.0")
Weight	≤ 500 g
Others	
RESET button	Support
Wi-Fi Indicator	Solid on: Wi-Fi is initializing or there is no data transmission through Wi-Fi; Solid off: Wi-Fi exception occurs; Flickering slowly (on for 2 sec and off for 2 sec): Wi-Fi is initialized and there is data transmission through Wi-Fi
SD Card Indicator	Solid on: SD card is detected; Solid off: No SD card is detected; Flickering: There is data transmission
Online Indicator	Solid on: Network is connected; Solid off: Network is disconnected or network exception occurs
Power Indicator	Solid on: Device is powered up; Solid off: Device is powered off or power supply exception occurs; Flickering: Device is being restored

▪ Physical Interface

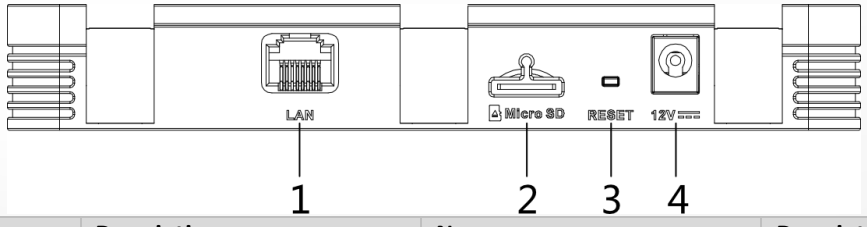

No.	Description	No.	Description
1	LAN network interface	3	Reset button


2	Micro SD card interface	4	Power supply

▪ Available Model

DS-7104NI-S1/W(STD)

DS-7104NI-S1/W(STD)/BRA/MAO

▪ Dimension

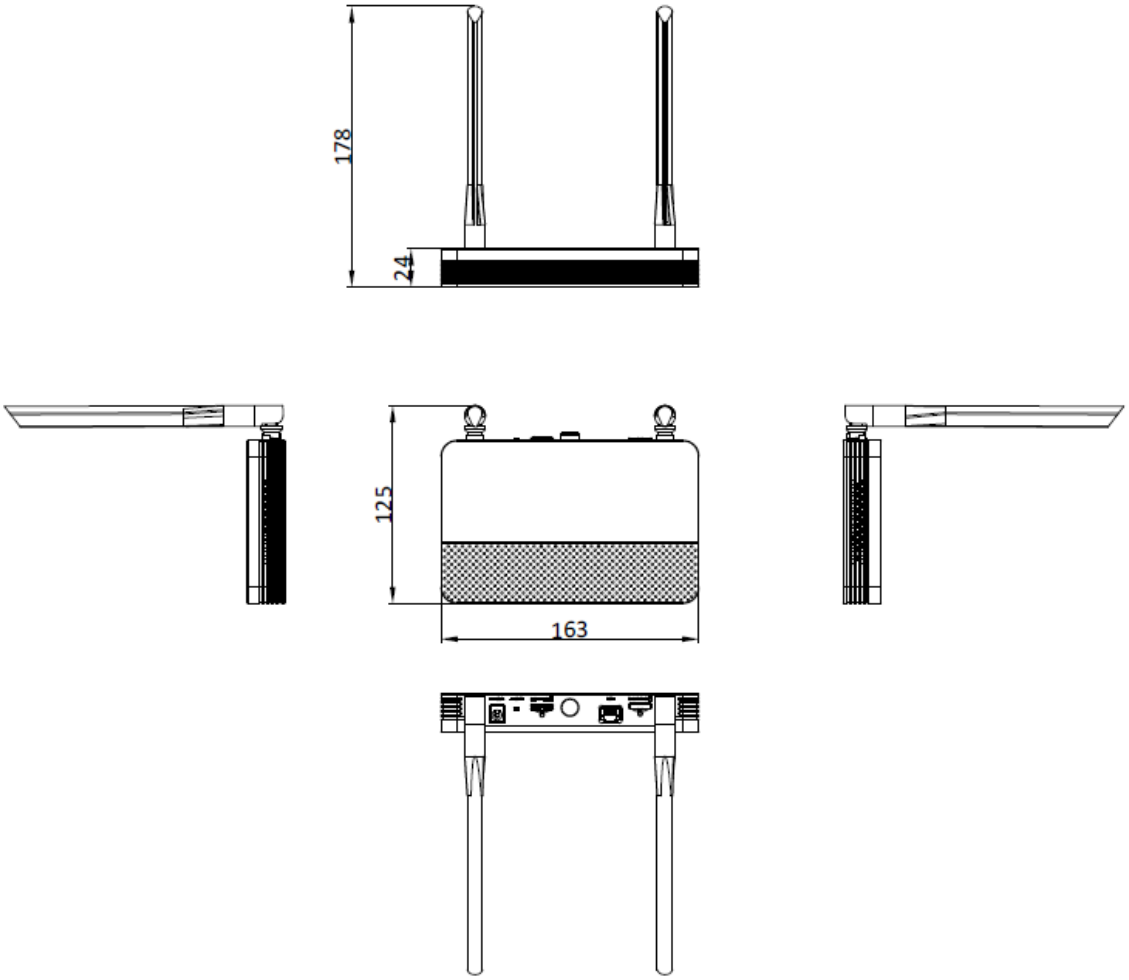

scale/1:1;Unit/mm

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®