

DS-K2622X **Pro Series Access Controller**



- Supports IPv4, IPv6 and DHCP
- Supports AES256, RSA2048, and TLS 1.2 encryption protocols
- Web configuration management. All configurations can be realized via web without software application
- Supports professional access control applications such as multi-door interlocking and anti-passback
- Supports backup battery access
- Supports OSDP, and a variety of wiegend formats to connect to third-party card readers
- It has status indicators such as power supply, communication and operation, which is convenient for equipment health detection
- Supports 2-door control



▪ Specification

Network	
Wired network	10/100 Mbps self adaptive
Interface	
Network interface	1
Lock control	2
Exit button	2
Door contact input	2
Alarm input	4
Alarm output	4
TAMPER	1
RS-485	2 for card reader (1 for communication, 1 for redundancy; each interface can connect up to 4 readers)
Wiegand	4, standard 26/34 input, supports custom Wiegand settings
Fire interface	Support
Capacity	
Linked door capacity	2
Linked card reader capacity	4 RS-485 card readers (OSDP protocol) and 4 Wiegand card readers
General	
Power supply	100 VAC to 240 VAC
Battery	Charge and discharge
Power consumption	≤ 72 W
Working temperature	-10 °C to 55 °C (14 °F to 131 ° F)
Working humidity	0% to 90% (No condensing)
Installation	Wall mounting
Language	English, Thai, Traditional Chinese, Indonesian, Vietnamese, Arabic, Spanish (Europe), Spanish (South America), Italian, French, Dutch, Russian, Ukrainian, Portuguese (Europe), Portuguese (Brazil), Serbian, Croatian, Bulgarian, German, Greek, Romanian and Turkish
Function	
Configuration via Web browser	Support
Multi-factor authentication	Support
Anti-passback	Support
Multi-door interlocking	Support

▪ Available Model

DS-K2622X

▪ Dimension

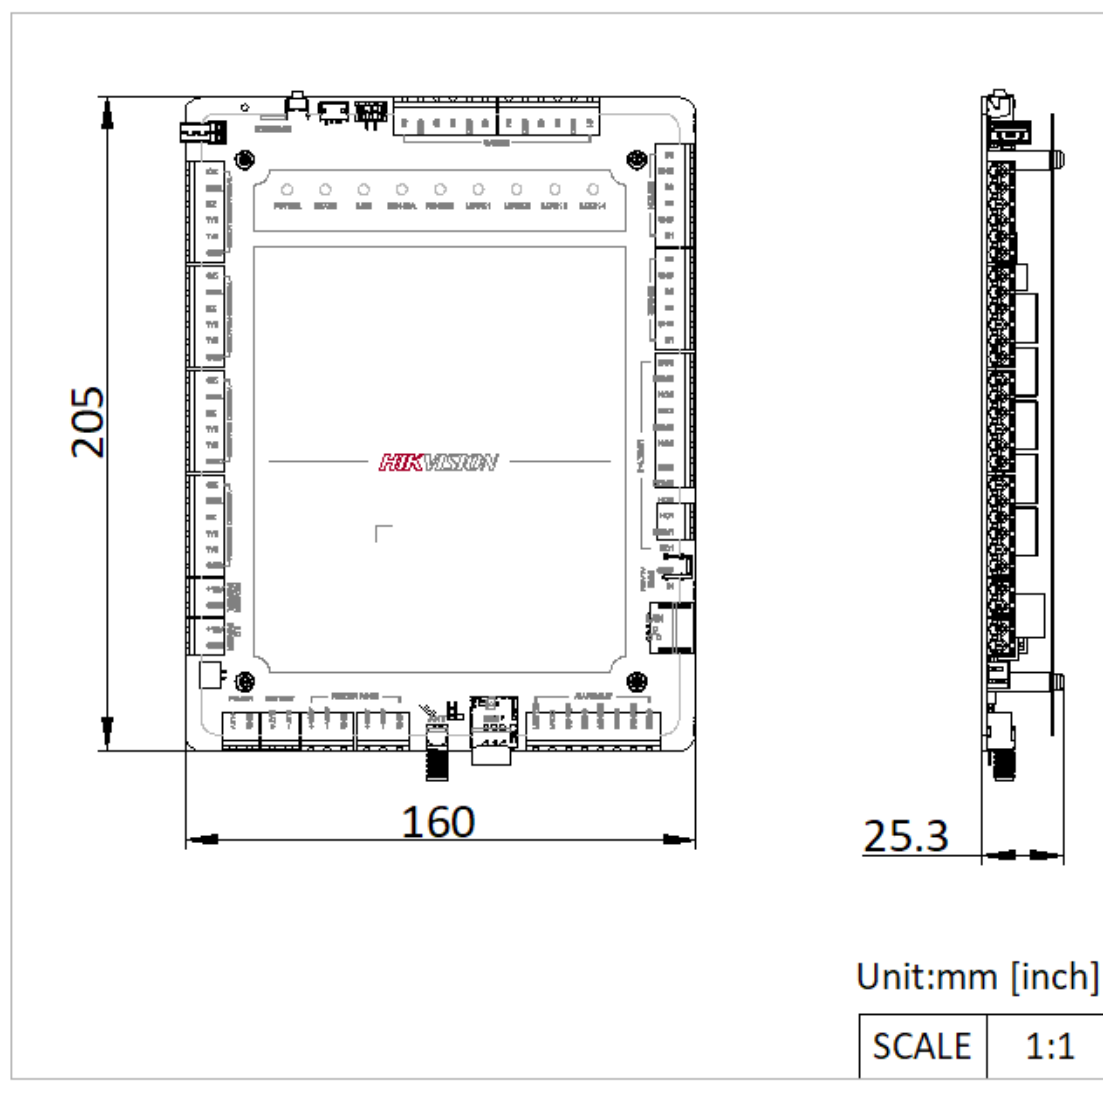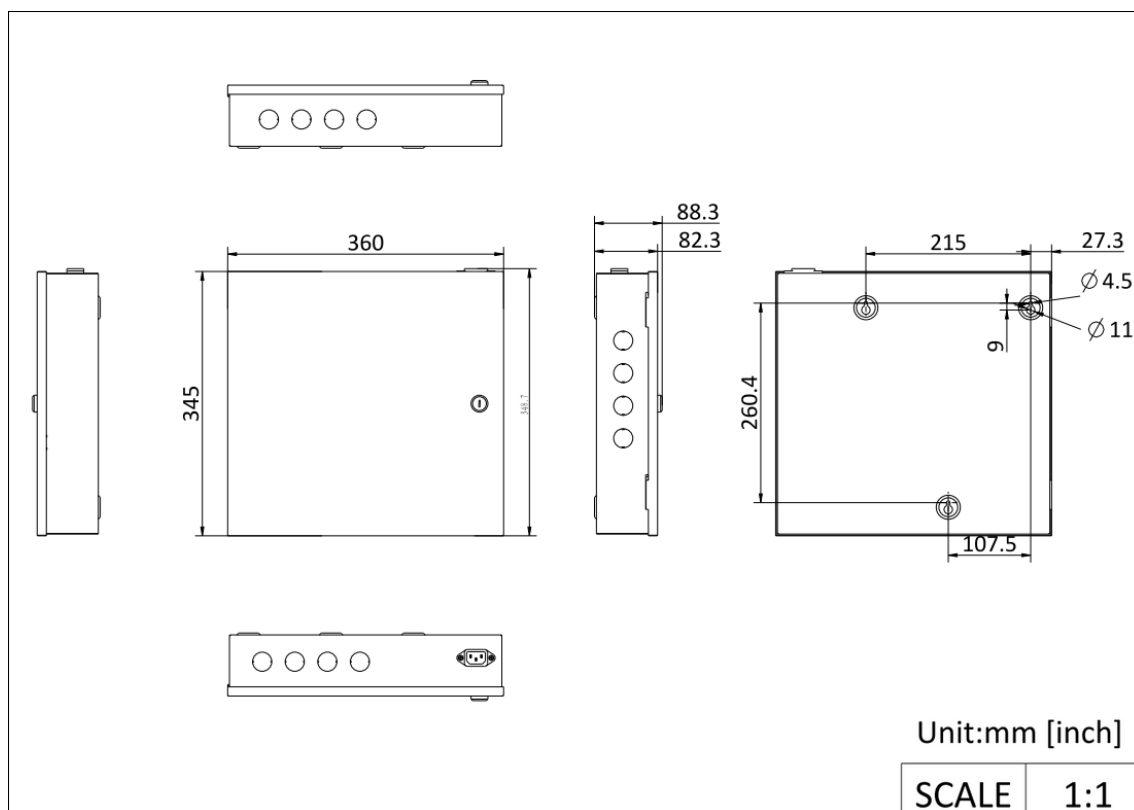



See Far, Go Further



www.hikvision.com
support@hikvision.com

