

DS-K3G530LX **Pro Tripod Turnstile**



- Motor-driven, longer service life and better traffic experience.
- Better anti-tailgating function, eliminating tailgating and accurate counting.
- Can be integrated with any 3rd access control system through exit button interface.
- Slim appearance, but strong, showing beauty and elegance.
- Applicable to indoor and outdoor scenes, whether it is scenic spots, gyms or bus stations.

▪ Specification

System	
Motor	Brushless motor
MCBF	≥ 5 million times
Network	
Wired network	NA
Interface	
Network interface	NA
Lock control	NA
Exit button	2
Alarm output	NA
TAMPER	NA
RS-485	NA
RS-232	NA
Wiegand	NA
Fire alarm input	1
Case input	NA
Hardware	
Access controller	Not supplied
Capacity	
Card capacity	NA
Event capacity	NA
Authentication	
Card	NA
Function	
Configuration via PC Web	Not support
Configuration via mobile Web	Not support
Audio prompt	Not support
Keypad configuration	Support
Communication protocol	NA
Keyfob	Not support
General	
Throughput	30 to 60 persons per minute The actual throughput is affected by the person passing rate and passing method.
Lane width	550 mm (21.65")
Barrier material	1.2 mm stainless pipe
Pedestal material	SUS304 stainless steel 1.5 mm (mostly)
Power consumption	Standby: 25 W Working: 55 W Peak: 65 W
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Working humidity	0% to 95% (No condensing)
Protective level	IPX4
Dimensions	Without package: 1500 mm × 130 mm × 1002.5 mm (59.1" × 5.1" × 39.5") With package: 1660 mm × 510 mm × 1305 mm (65.4" × 20.1" × 51.4")

Weight	Net: 52.22 kg (115.13 lb) Gross: 65.59 kg (144.6 lb)
Approval	CE/CB/RoHS/REACH/WEEE
Power supply method	100 to 120 VAC~ / 200 to 240 VAC~, 50/60 Hz, 1.0 to 1.5 A
Configuration	
Lane width	550
Pedestal length	1500 mm
Module selection	NO
Pedestal width	130 mm
Wall distance	20 mm
Base	YES
Barrier material	Stainless steel pipe
Application environment	Indoor and outdoor
Authentication mode	Face
Card type	EM,M1,Desfire
Recommended width	550 mm
Base model	DS-K3G530X-BASE
Side pedestal	YES
Side pedestal type	Fence (130 mm)
Product type	Tripod Turnstile
Remote controller type	433Mhz,868Mhz
Movement Protrusion Width	105 mm
Convert Face	NO
Door wing gap	36 mm

▪ Note

The main element of the turnstile is stainless steel, which is rust less (antioxidant) and corrosion resistant (The anti-corrosion ability in the medium of acid, alkali, and salt). In order to keep the stainless steel from being oxidized or corroded, you should clean and care the turnstile surface periodically.

The instructions and tips for maintaining the turnstile are as follows:


1. Select different stainless steel types according to the variety of the environments. You can select 304 stainless steel for common circumstances and 316 stainless steel for the scenarios of seaside and chemical plants.
2. Keep the device surface clean and dry.
3. Use non-woven cloth and ethyl alcohol to clean the dirt on the device surface.
4. Use sourcing pad (do not use mesh cleaning ball) to clean the rust on the device surface by following the wire drawing on the stainless steel. And then use non-woven cloth and stainless steel cleaner to wipe the device surface.
5. Clean and maintain the device by using non-woven cloth and stainless steel cleaner periodically. It is suggested to clean the device every month in common circumstances and every week for severe environments (seaside and chemical plants for instance).

▪ Available Model

DS-K3G530LX-R/Pg-Dm55


DS-K3G530LX-R/Dm55

▪ Dimension

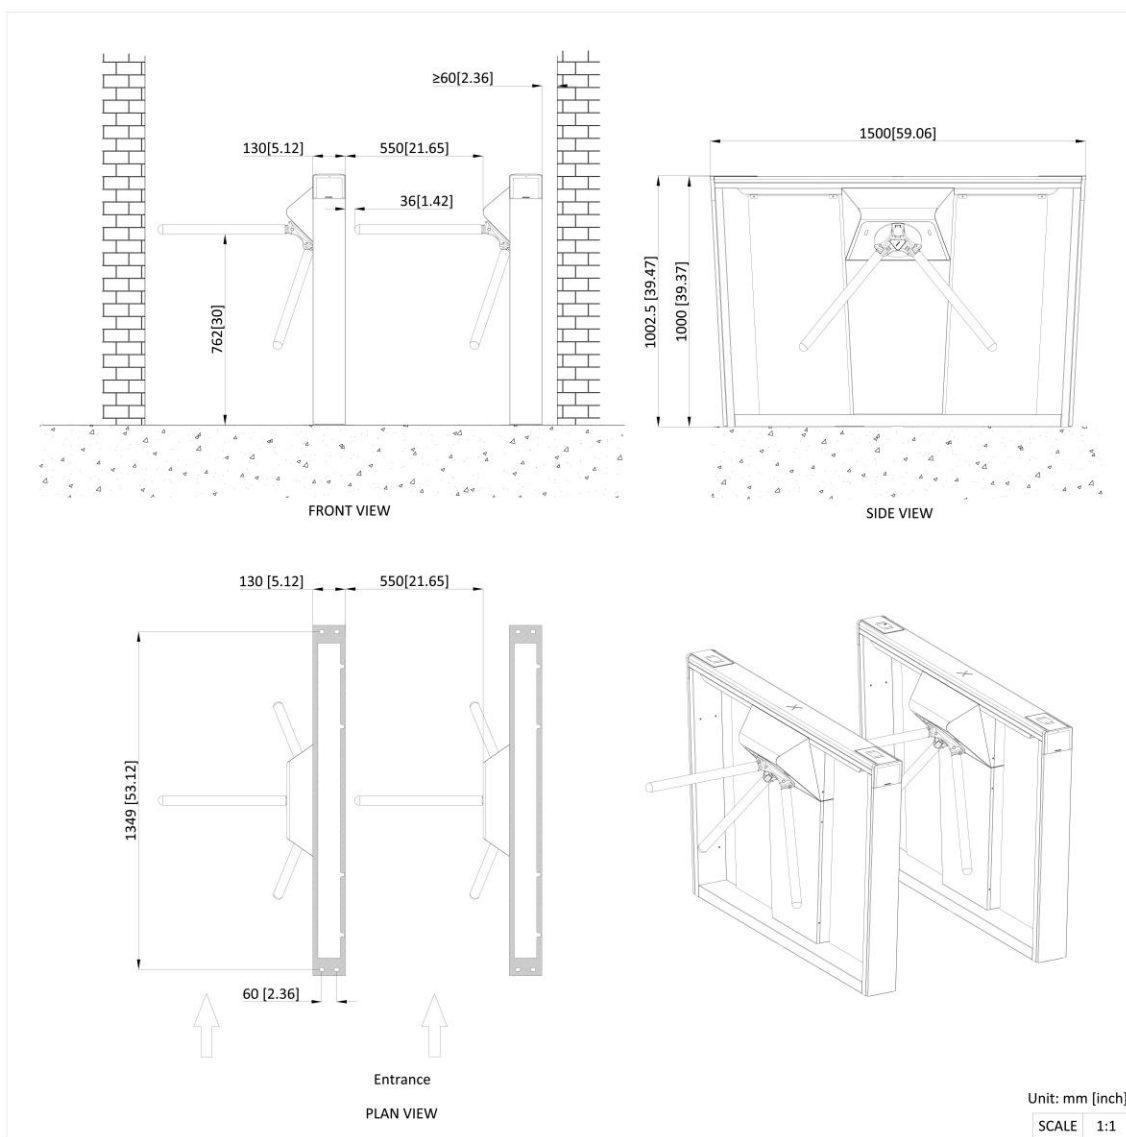

▪ Accessory

▪ Optional

DS-KEB30-AC	DS-KAB6-ZU1	DS-KAB6-ZU3	DS-KAB6-ZU2	DS-KSM02/G530
				

See Far, Go Further



www.hikvision.com
support@hikvision.com

