

**DS-2CD3763G2-LIZSU/SL****6 MP AcuSense Strobe Light and Audible Warning Motorized Varifocal Dome Network**

# AcuSense



Hikvision has been dedicated to develop products with security since established. Hikvision always follows security by design principle and has adopted many methods of security technologies into our product development lifecycle, including terminal security, data security, application security, network security, and privacy protection. In the meantime, the security technologies used by Hikvision are all in compliance with local applicable laws and safety regulations. These security measures could enhance product's cyber security protection capability and protect your devices as well as your data from malicious cyber attacks.

- High quality imaging with 6 MP resolution
- Acusense: Focus on human and vehicle classification based on deep learning
- Smart Hybrid Light: Integrates IR and White lights, 3 supplemental lighting modes
- Built-in arrayed dual-microphone for real-time high quality audio security
- Clear imaging against strong back light due to 120 dB true WDR technology
- Efficient H.265+ compression technology
- Motorized varifocal lens for easy installation and monitoring
- Water and dust resistant (IP67) and vandal-resistant (IK10)
- Active strobe light and audio alarm to warn intruders off

## ▪ Specification

| Camera                 |                                                                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor           | 1/2.4" Progressive Scan CMOS                                                                                                                                                               |
| Max. Resolution        | 3200 × 1800                                                                                                                                                                                |
| Min. Illumination      | Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with light                                                                                                                                        |
| Shutter Time           | 1/3 s to 1/100,000 s                                                                                                                                                                       |
| Day & Night            | IR cut filter                                                                                                                                                                              |
| Angle Adjustment       | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°                                                                                                                                       |
| Lens                   |                                                                                                                                                                                            |
| Lens Type              | Varifocal lens, motorized lens, 2.7 to 13.5 mm                                                                                                                                             |
| Focal Length & FOV     | 2.7 to 13.5 mm, horizontal FOV 102.3° to 35°, vertical FOV 53.9° to 19.7°, diagonal FOV 122.9° to 40.1°                                                                                    |
| Lens Mount             | Ø14                                                                                                                                                                                        |
| Iris Type              | Auto-iris                                                                                                                                                                                  |
| Aperture               | F1.6                                                                                                                                                                                       |
| DORI                   |                                                                                                                                                                                            |
| DORI                   | 2.7 to 13.5 mm: D: 75.3 m to 201.0 m, O: 29.9 m to 79.8 m, R: 15.1 m to 40.2 m, I: 7.5 m to 20.1 m                                                                                         |
| Illuminator            |                                                                                                                                                                                            |
| Supplement Light Type  | IR, White Light                                                                                                                                                                            |
| Supplement Light Range | Up to 40 m                                                                                                                                                                                 |
| Smart Supplement Light | Yes                                                                                                                                                                                        |
| IR Wavelength          | 850 nm                                                                                                                                                                                     |
| Video                  |                                                                                                                                                                                            |
| Main Stream            | 50 Hz:<br>25 fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)<br>60 Hz:<br>30 fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)                                               |
| Sub-Stream             | 50 Hz:<br>25 fps (1280 × 720, 640 × 480, 640 × 360)<br>60 Hz:<br>30 fps (1280 × 720, 640 × 480, 640 × 360)                                                                                 |
| Third Stream           | 50 Hz:<br>10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)<br>60 Hz:<br>10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)<br>*Third stream is supported under certain settings. |
| Fourth Stream          | 50 Hz:<br>10 fps (1280 × 720, 640 × 480, 640 × 360)<br>60 Hz:<br>10 fps (1280 × 720, 640 × 480, 640 × 360)<br>*Fourth stream is supported under certain settings.                          |

|                             |                                                                                                                                                                                                                                      |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video Compression           | Main stream: H.265/H.264/H.264+/H.265+,<br>Sub-stream: H.265/H.264/MJPEG,<br>Third stream: H.265/H.264,<br>Fourth stream: H.265/H.264/MJPEG<br>*Third stream and fourth stream are supported under certain settings.                 |
| Video Bit Rate              | 32 Kbps to 16 Mbps                                                                                                                                                                                                                   |
| H.264 Type                  | Baseline Profile, Main Profile, High Profile                                                                                                                                                                                         |
| H.265 Type                  | Main Profile                                                                                                                                                                                                                         |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding                                                                                                                                                                                                             |
| Bit Rate Control            | CBR, VBR                                                                                                                                                                                                                             |
| Region of Interest (ROI)    | 5 fixed regions for main stream and sub-stream                                                                                                                                                                                       |
| Target Cropping             | Yes                                                                                                                                                                                                                                  |
| <b>Audio</b>                |                                                                                                                                                                                                                                      |
| Audio Compression           | G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC                                                                                                                                                                                             |
| Audio Bit Rate              | 64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC-LC)                                                                                                    |
| Audio Sampling Rate         | 8 kHz/16 kHz/32 kHz/48 kHz                                                                                                                                                                                                           |
| Environment Noise Filtering | Yes                                                                                                                                                                                                                                  |
| <b>Network</b>              |                                                                                                                                                                                                                                      |
| Protocols                   | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SNMP, WebSocket, WebSockets                                                          |
| Simultaneous Live View      | Up to 6 channels                                                                                                                                                                                                                     |
| API                         | ONVIF (Profile S, Profile G), ISAPI, SDK, ISUP                                                                                                                                                                                       |
| Security                    | Password protection, complicated password, HTTPS encryption, IP address filter, Security Audit Log, basic and digest authentication for HTTP/HTTPS, TLS 1.1/1.2/1.3, WSSE and digest authentication for Open Network Video Interface |
| User/Host                   | Up to 32 users<br>3 user levels: administrator, operator, and user                                                                                                                                                                   |
| Client                      | iVMS-4200, Hik-Connect, Hik-Central                                                                                                                                                                                                  |
| Network Storage             | NAS (NFS, SMB/CIFS), Auto Network Replenishment (ANR),<br>Together with high-end Hikvision memory card, memory card encryption and health detection are supported.                                                                   |
| Web Browser                 | Plug-in free live view: Chrome 80+, Firefox 80+, Edge 89+, Safari 13+,<br>Local service: Chrome 80+, Firefox 80+, Edge 89+, Safari 13+                                                                                               |
| <b>Image</b>                |                                                                                                                                                                                                                                      |
| Image Parameters Switch     | Yes                                                                                                                                                                                                                                  |
| Day/Night Switch            | Day, Night, Auto, Schedule                                                                                                                                                                                                           |
| Image Settings              | Rotate mode                                                                                                                                                                                                                          |
| Wide Dynamic Range (WDR)    | 120 dB                                                                                                                                                                                                                               |
| SNR                         | ≥ 52 dB                                                                                                                                                                                                                              |
| Image Enhancement           | BLC, HLC, 3D DNR                                                                                                                                                                                                                     |
| Privacy Mask                | 8 programmable polygon privacy masks                                                                                                                                                                                                 |
| <b>Interface</b>            |                                                                                                                                                                                                                                      |
| Ethernet Interface          | 1 RJ45 10 M/100 M self-adaptive Ethernet port                                                                                                                                                                                        |
| On-Board Storage            | Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB                                                                                                                                                    |

|                                  |                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Audio                            | Built-in Microphone: Arrayed dual-microphone<br>1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 K $\Omega$ , interface type: non-equilibrium,<br>1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 $\Omega$ , interface type: non-equilibrium       |
| Alarm                            | 1 input, 1 output (max. 24 VDC/24 VAC, 1 A)                                                                                                                                                                                                                                                                                                           |
| Reset Key                        | Yes                                                                                                                                                                                                                                                                                                                                                   |
| Built-in Speaker                 | 1 built-in speaker, Power: 1.5 W, max. sound pressure level: 10 cm: 120 dB.                                                                                                                                                                                                                                                                           |
| <b>Event</b>                     |                                                                                                                                                                                                                                                                                                                                                       |
| Basic Event                      | Motion detection (support alarm triggering by specified target types (human and vehicle)), video tampering alarm, exception                                                                                                                                                                                                                           |
| Smart Event                      | Unattended baggage detection, object removal detection, loitering detection, people gathering detection, fast moving detection, parking detection, video quality diagnosis                                                                                                                                                                            |
| Linkage                          | Upload to FTP/NAS/memory card, notify surveillance center, send email, trigger alarm output, trigger recording, trigger capture, strobe light flashing, audible warning                                                                                                                                                                               |
| <b>Deep Learning Function</b>    |                                                                                                                                                                                                                                                                                                                                                       |
| Face Capture                     | Yes                                                                                                                                                                                                                                                                                                                                                   |
| Perimeter Protection             | Line crossing, intrusion, region entrance, region exiting<br>Support alarm triggering by specified target types (human and vehicle)                                                                                                                                                                                                                   |
| <b>General</b>                   |                                                                                                                                                                                                                                                                                                                                                       |
| Power                            | 12 VDC $\pm$ 25%, 1.35 A, max. 16.2 W, $\varnothing$ 5.5 mm coaxial power plug, reverse polarity protection,<br>PoE: IEEE 802.3at, Class 4, max. 18 W                                                                                                                                                                                                 |
| Material                         | Aluminum alloy body                                                                                                                                                                                                                                                                                                                                   |
| Dimension                        | $\varnothing$ 121.5 mm $\times$ 97.6 mm ( $\varnothing$ 4.8" $\times$ 3.8")                                                                                                                                                                                                                                                                           |
| Package Dimension                | 150 mm $\times$ 150 mm $\times$ 141 mm (5.9" $\times$ 5.9" $\times$ 5.6")                                                                                                                                                                                                                                                                             |
| Weight                           | Approx. 1531 g (3.4 lb.)                                                                                                                                                                                                                                                                                                                              |
| With Package Weight              | Approx. 2000 g (4.4 lb.)                                                                                                                                                                                                                                                                                                                              |
| Storage Conditions               | -30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                     |
| Startup and Operating Conditions | -30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                     |
| Language                         | 33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian |
| General Function                 | Heartbeat, mirror, flash log, password reset via email, pixel counter, anti-banding                                                                                                                                                                                                                                                                   |
| Flashing Light                   | White Light                                                                                                                                                                                                                                                                                                                                           |
| <b>Approval</b>                  |                                                                                                                                                                                                                                                                                                                                                       |
| EMC                              | CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021,<br>RCM: AS/NZS CISPR 32: 2015,<br>IC: ICES-003: Issue 7,<br>KC: KN32: 2015, KN35: 2015                                                                                                                                      |

|             |                                                                                                                                         |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Safety      | CB: IEC 62368-1:2014+A11,<br>CE-LVD: EN 62368-1:2014/A11: 2017,<br>BIS: IS 13252 (Part1): 2010/IEC 60950-1:2005,<br>LOA: IEC/EN 60950-1 |
| Environment | CE-RoHS: 2011/65/EU,<br>WEEE: 2012/19/EU,<br>Reach: Regulation (EC) No 1907/2006                                                        |
| Protection  | IP67: IEC 60529-2013, IK10: IEC 62262:2002                                                                                              |

## ▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

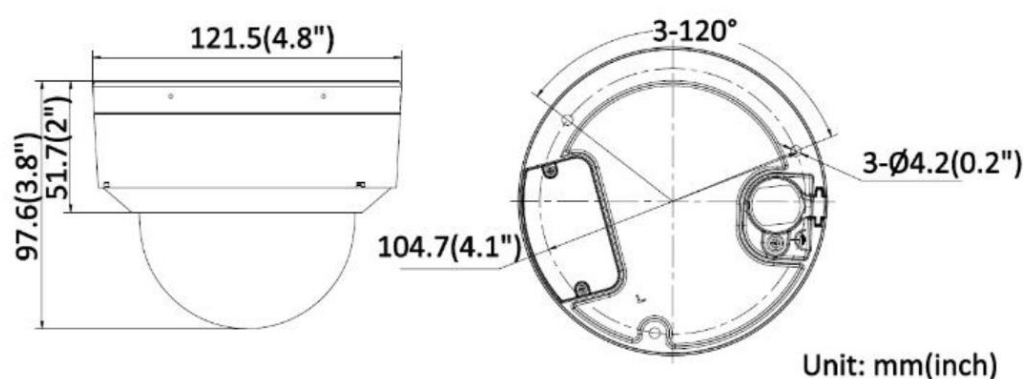
This model has NO SPECIFIC PROTECTION.

| Level                  | Description                                                                                                                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Top-level protection   | Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.                                             |
| Moderate protection    | Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain. |
| No specific protection | Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.                                                                                                                                  |

## ▪ Available Model

DS-2CD3763G2-LIZSU/SL(2.7-13.5mm)

## ▪ Dimension



## ▪ Accessory

### ▪ Optional

DS-220AZJ-130-WA

DS-4221ZJ-WC









DS-1275ZJ-SUS

DS-1272ZJ-120B

DS-1276ZJ-SUS

|                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |   |  |
| <b>DS-1272ZJ-120</b>                                                              | <b>DS-1275ZJ-S-SUS</b>                                                            | <b>DS-220AZJ-145-WA</b>                                                           | <b>DS-1271ZJ-120</b>                                                                | <b>DS-1280ZJ-DM46</b>                                                               |
|  |  |  |  |  |

## ■ Installation Methods

|                                                                                                          |                                                                                     |                                                                                     |                                                                                       |                                                                                       |
|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Wall Mounting</b><br><b>DS-220AZJ-130-WA</b>                                                          | <b>Wall Mounting</b><br><b>DS-1272ZJ-120B+DS-1</b><br><b>280ZJ-DM46</b>             | <b>Wall Mounting</b><br><b>DS-1272ZJ-120+DS-12</b><br><b>53ZJ-M</b>                 | <b>Wall Mounting</b><br><b>DS-220AZJ-145-WA</b>                                       | <b>In-Ceiling Mounting</b><br><b>DS-4221ZJ-WC</b>                                     |
|                       |  |  |  |  |
| <b>Vertical Pole Mounting</b><br><b>DS-1275ZJ-SUS+DS-12</b><br><b>72ZJ-120+DS-1280ZJ-</b><br><b>DM46</b> | <b>Vertical Pole Mounting</b><br><b>DS-1275ZJ-S-SUS+DS-</b><br><b>220AZJ-130-WA</b> | <b>Corner Mounting</b><br><b>DS-1276ZJ-SUS+DS-12</b><br><b>72ZJ-120</b>             | <b>Pendant Mounting</b><br><b>DS-1271ZJ-120+DS-12</b><br><b>80ZJ-DM46</b>             | <b>Junction Box</b><br><b>DS-1280ZJ-DM46</b>                                          |
|                       |  |  |  |  |

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

