

DS-D5F10CB/BH Scheduling Panel



- Meeting information display: Meeting topic, meeting room information, host, time and other information according to the meeting status;
- Face and card-swiping sign-in authentication: During the meeting time, through automatic identification and card-swiping authentication, participants are signed in and reported to the platform;
- Access control linkage control: According to the result of personnel sign-in authentication, trigger the electric signal, directly linkage electromagnetic lock to open the door;
- System compatibility: Support for AD domain functions and access to exchange server
- Meeting management system: Hispire SMM Platform


▪ Specification

Product Model	
Product Model	DS-D5F10CB/BH
Display	
Screen Size	10.1 inch
Brightness	250 cd/m ²
Viewing Angle	170°(H)/170°(V)
Physical Resolution	1280 × 800
Touch	
Touch Point	10
Built-in System	
Processor	4 cores ARM Cortex-A55
Memory	2 GB
Built-In Storage	16 GB
Operation System	Android 11.0
Camera	2 MP WDR Camera
Card Reader	NFC, 13.56MHz, (ISO14443A/ISO14443B/ISO 15693/M1 card/Sony felica)
Mic Function	Include
Internal Function	
Loudspeaker	8 Ω, 2 W × 2
Interface	
Data Transmission Interface	Micro USB OTG × 1; USB 3.0 × 1 Access control linkage interface × 1; 3.5 mm Audio × 1
Network Interface	RJ45, 1000 M LAN (IEEE802.3at, PoE 56-57V, class 4, 25.5 W)
Bluetooth	BT4.1
Indicator	LED
General	
Power	12 VDC, 1.5 A
Product Dimensions	275 × 170 × 25 mm
Mounting Type	Wall mounting
Power Consumption	18 W
Net Weight	1.5 kg
Package Dimensions	390 × 220 × 68 mm
Gross Weight	3.7 kg
Packing List	Power adapter × 1, Access control linkage line × 1, Quick start guide × 1, Screw kit × 1, Micro USB cable × 1, Compliance manual × 1
Working Environment	
Operation Humidity	0% to 95%
Storage Temperature	-40 °C to 85 °C
Operation Temperature	0 °C to 40 °C

▪ Available Model

DS-D5F10CB/BH

▪ **Dimension**

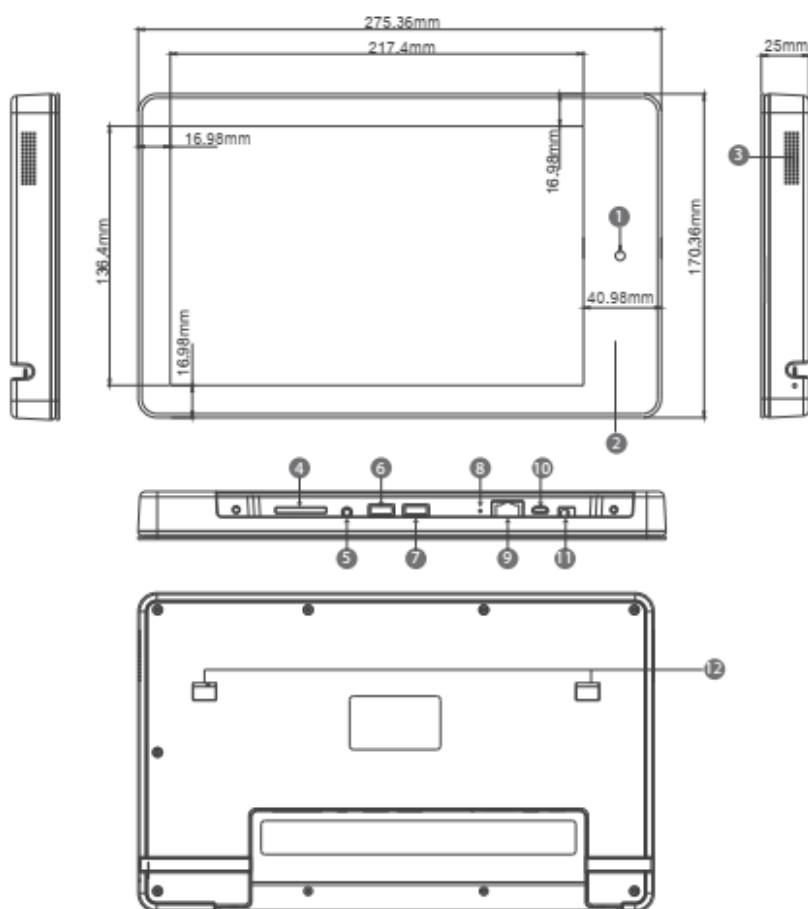

No	Function	No	Function
1	Camera	7	USB for serial(TTL format)
2	NFC (Optional)		
3	Speaker	8	Recovery
4	SD Card	9	RJ45 with POE
5	3.5mm earphone with MIC	10	Micro USB OTG
6	USB 3.0 host	11	DC in power supply port
		12	VESA:204.5MM

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

