

DS-D5F22CB/BH **22-inch Scheduling Panel**



- Beautiful appearance with 27-millimeter-thick body
- 1920 × 1080P@60Hz full HD, 10-point capacitive touch, and 8-millisecond rapid response
- Front tempered glass to prevent violence, and rounded-angle frame to prevent accidental injury
- Wall-mounted installation
- Support wired network / wireless Wi-Fi connection
- 4 cores CPU, 1.6 GHz, 2 G memory, build-in Android 8.1 operating system to support most software installation
- Built-in 13.56 MHz RFID card-swiping module with high response speed, compatible with the standard card of type A and B
- Control access control devices through Wiegand protocol, and door locks with relays
- Built-in 2 MP WDR camera captures clear images when facing against the light
- Built-in Hikvision face recognition algorithm, supporting recognizing 5 people in 1 second


▪ Specification

Product Model	
Product Model	DS-D5F22CB/BH
Display	
Screen Size	21.5 inch
Brightness	400 cd/m ²
Viewing Angle	178°(H)/178°(V)
Physical Resolution	1920 × 1080
Touch	
Touch Point	10
Built-in System	
Processor	Cortex-A55, 4 Cores
Memory	2 GB
Built-In Storage	16 GB
Operation System	Android 12.0
Camera	2 MP WDR Camera
Card Reader	RFID
Mic Function	Include
Internal Function	
Loudspeaker	4 Ω, 3 W × 2
Interface	
Data Transmission Interface	USB 2.0 × 1, USB 3.0 × 1, Card-swiping for IC card, Access control linkage
Network Interface	1000 M LAN, 2.4 GHz Wi-Fi with STA+AP support
Bluetooth	BT4.2
Indicator	/
Working Environment	
Operation Humidity	0% to 90%
Storage Temperature	−20 °C to 60 °C
Operation Temperature	0 °C to 40 °C
General	
Net Weight	6.1 kg
Gross Weight	7.3 kg
Power Consumption	48 W
Product Dimensions	520.71 (W) mm × 390.78 (H) mm × 27.3 (D) mm (with wall mounting); 520.71 (W) mm × 390.78 (H) mm × 26 (D) (without wall mounting)
Package Dimensions	662 × 10 × 530 mm
Mounting Type	Wall mounting
Packing List	Power adapter × 1, Access control linkage line × 1, Quick start guide × 1, Screw kit × 1, L-type ring spanner × 1, Wall mounting screw pack × 2, Dust-proof bag × 1, Intelligent cloud digital signage paper card × 1, Power cord × 1
Power	12VDC, 4 A


▪ Available Model

DS-D5F22CB/BH


Dimension

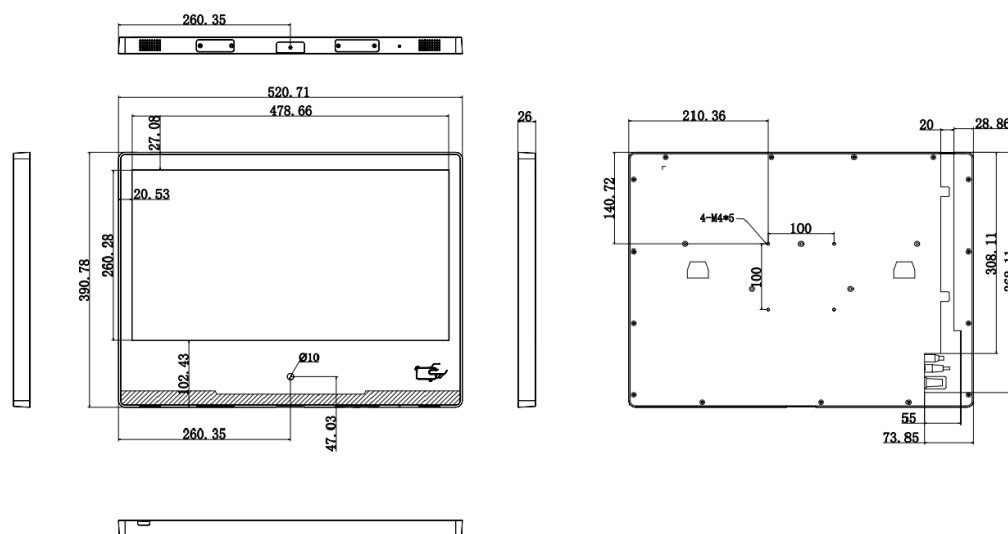

Without Wall Mounted Bracket

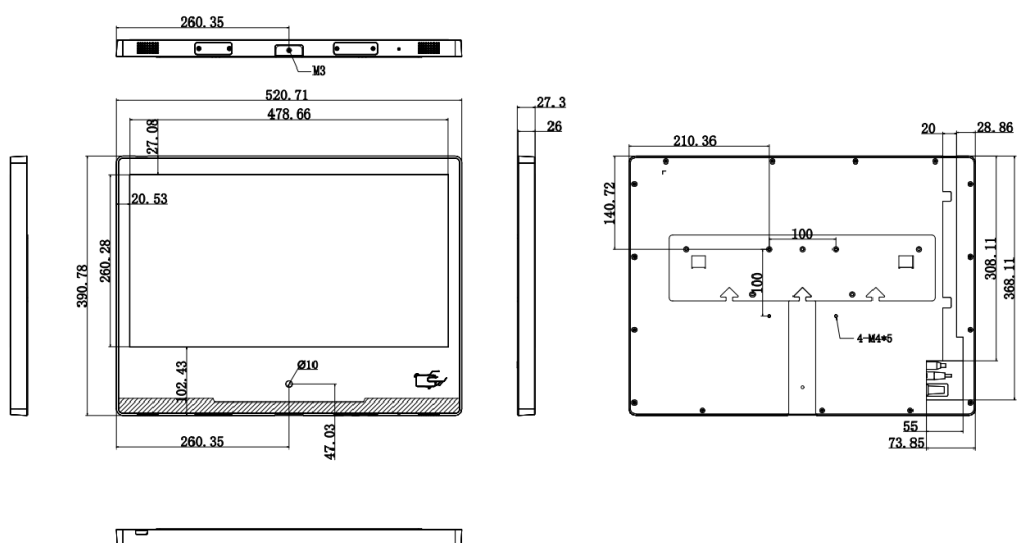

With Wall-mounted Bracket



 hikvisionhq